
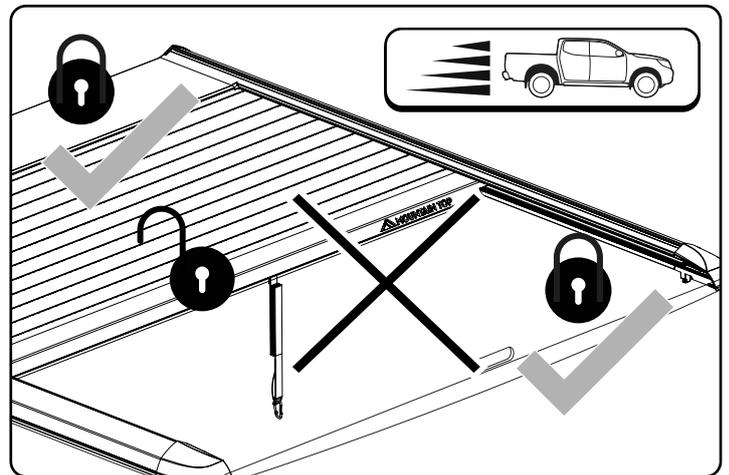
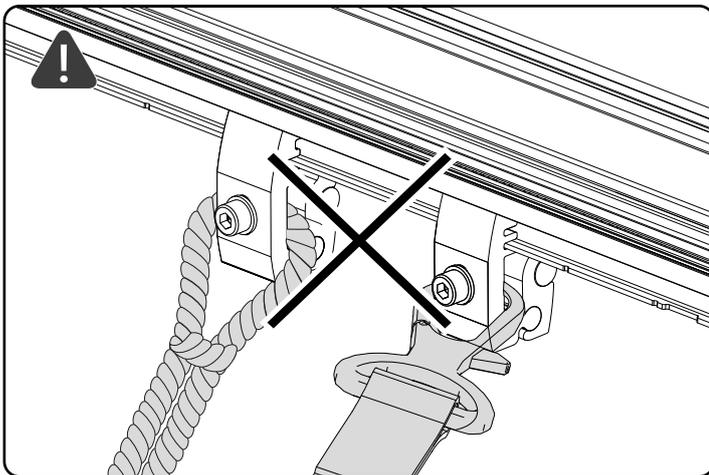
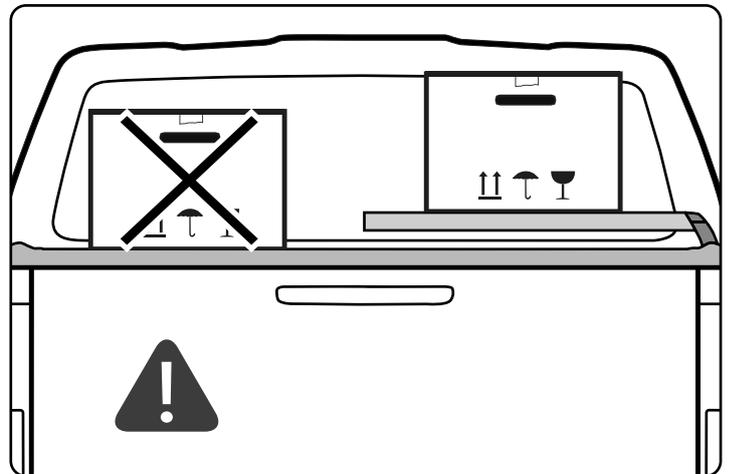
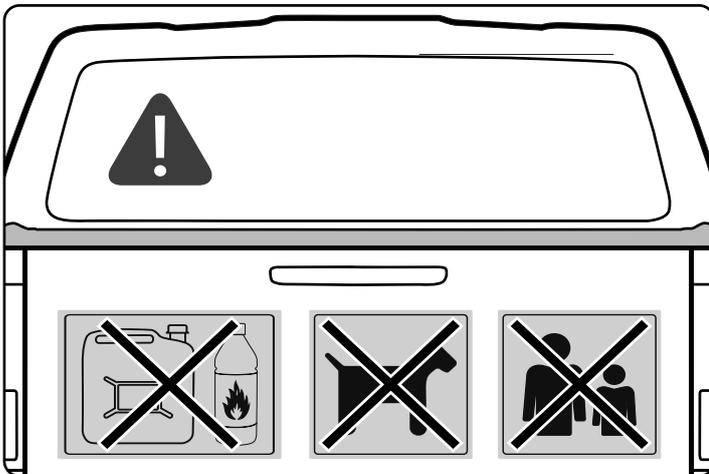



OWNERS MANUAL

MOUNTAIN TOP[®] EV0m ROLL COVER



1 WARNINGS

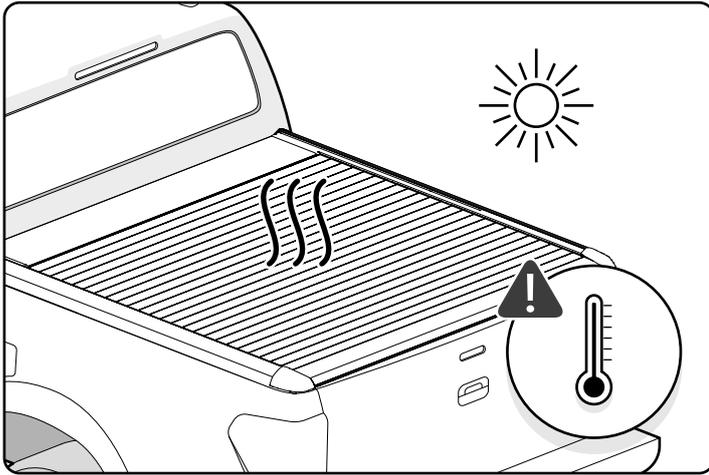


- Temperatures can be very high under the cover when closed.
- We do not recommend washing the EVO roll cover in a brushless carwash, as the coating may be damaged due to use of chemicals.

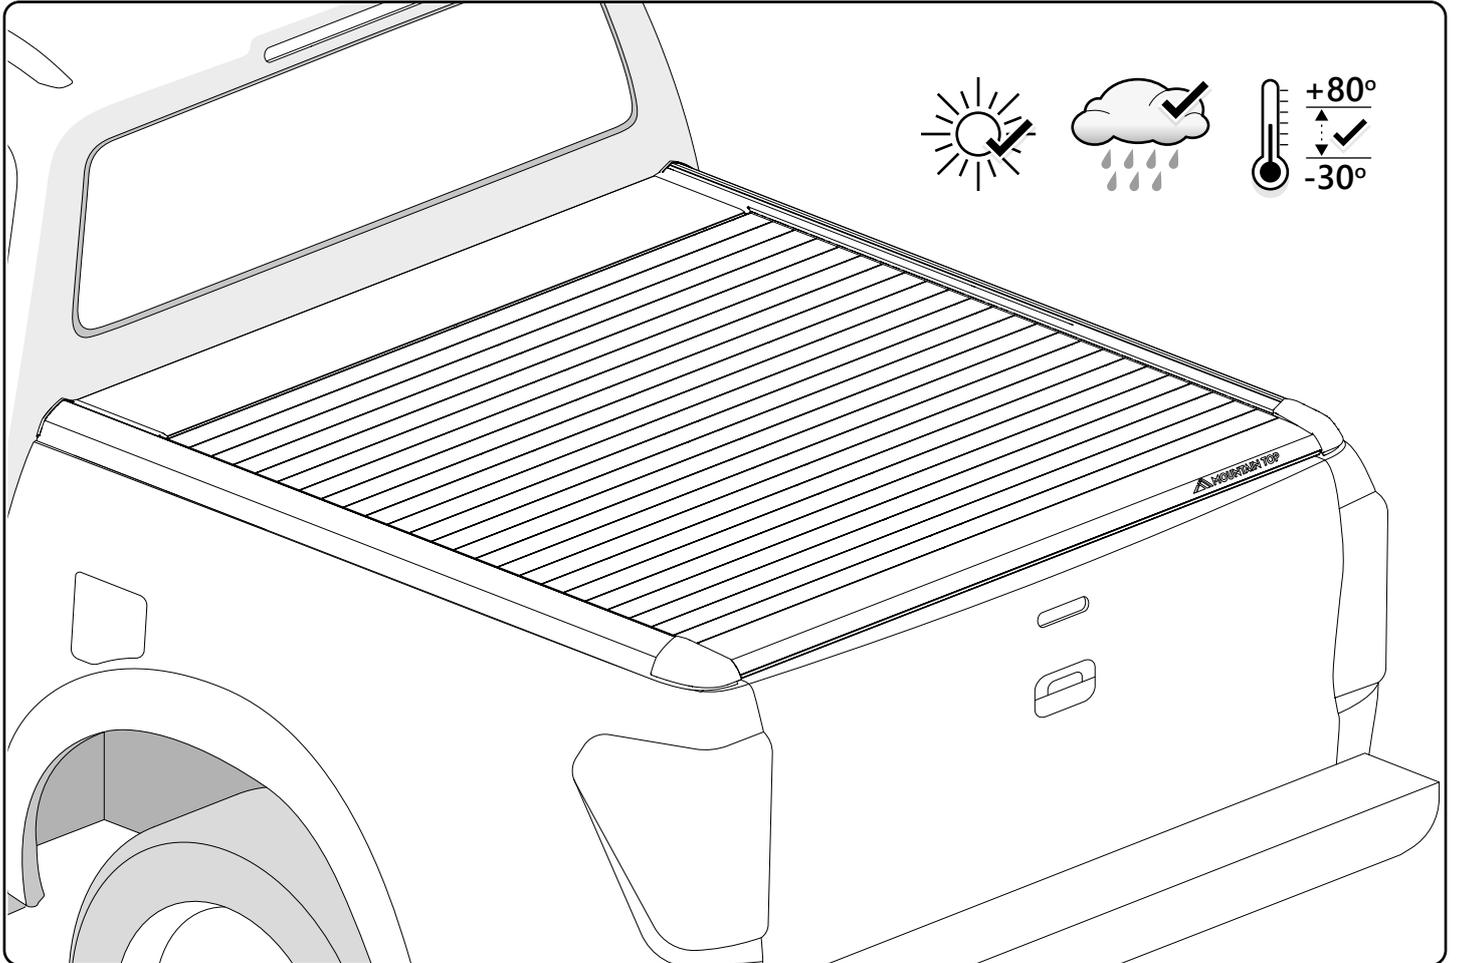2**CONDITIONS OF USE**

- The Mountain Top EVO roll cover design is lightweight and not suitable for extreme usage.
- Designed to withstand rain water, some water ingress may occur.
- Dust can enter the compartment through various gaps.
- Due to profiles which relatively quick heats up and cools down according to weath conditions can cause condensation on the inside.
- The EVO roll cover is not designed for loading although it can support normal snow loads.
- Goods in the bed must be secured during transportation to prevent damage.

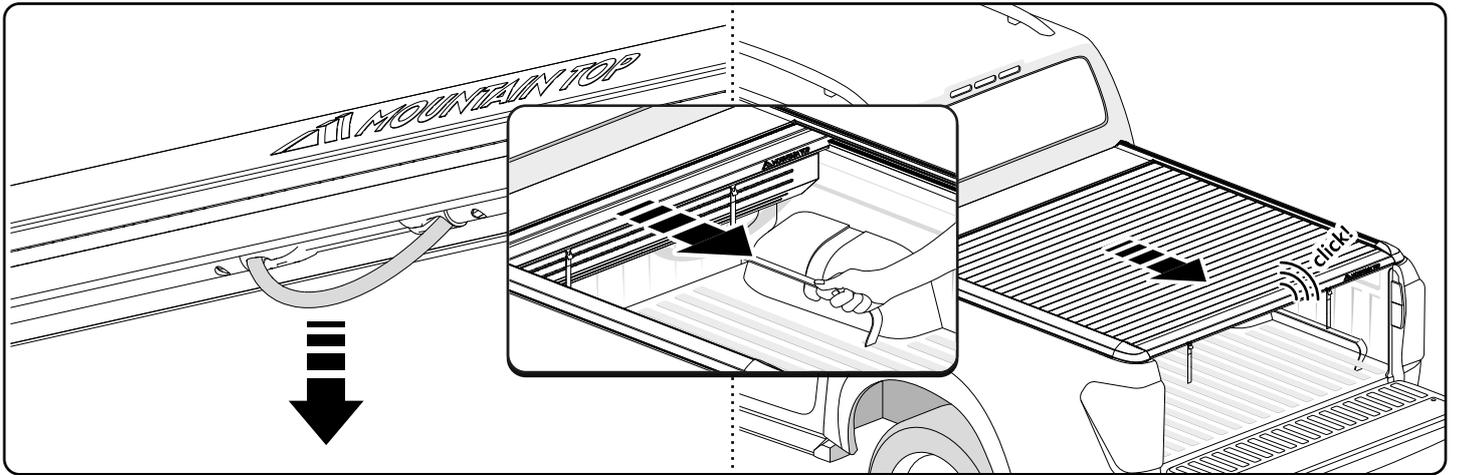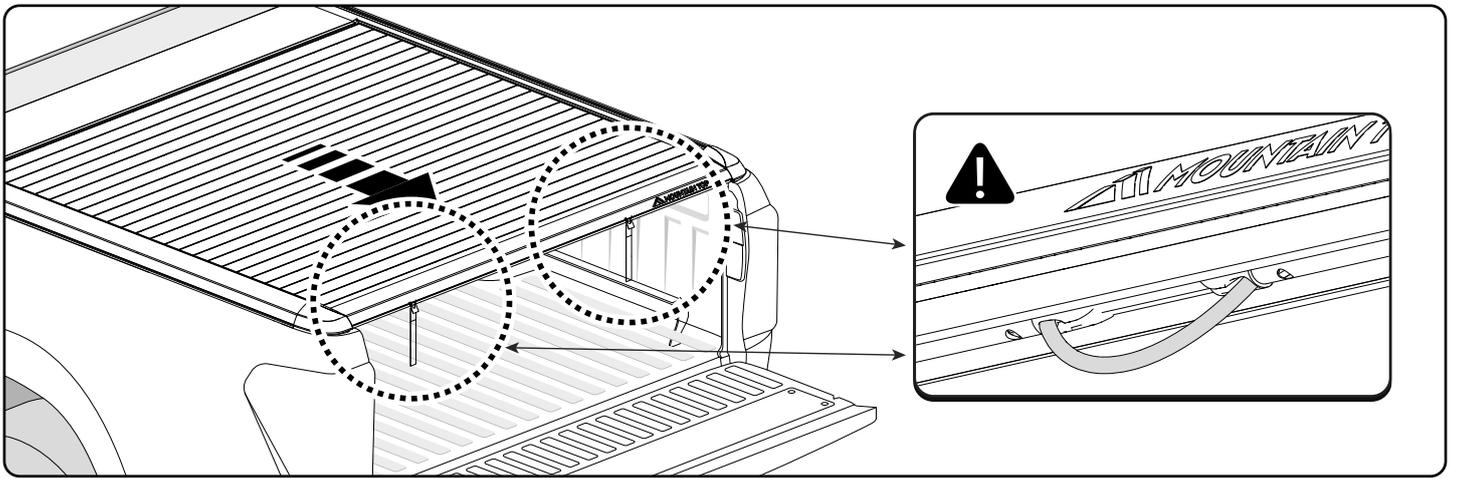



● Close

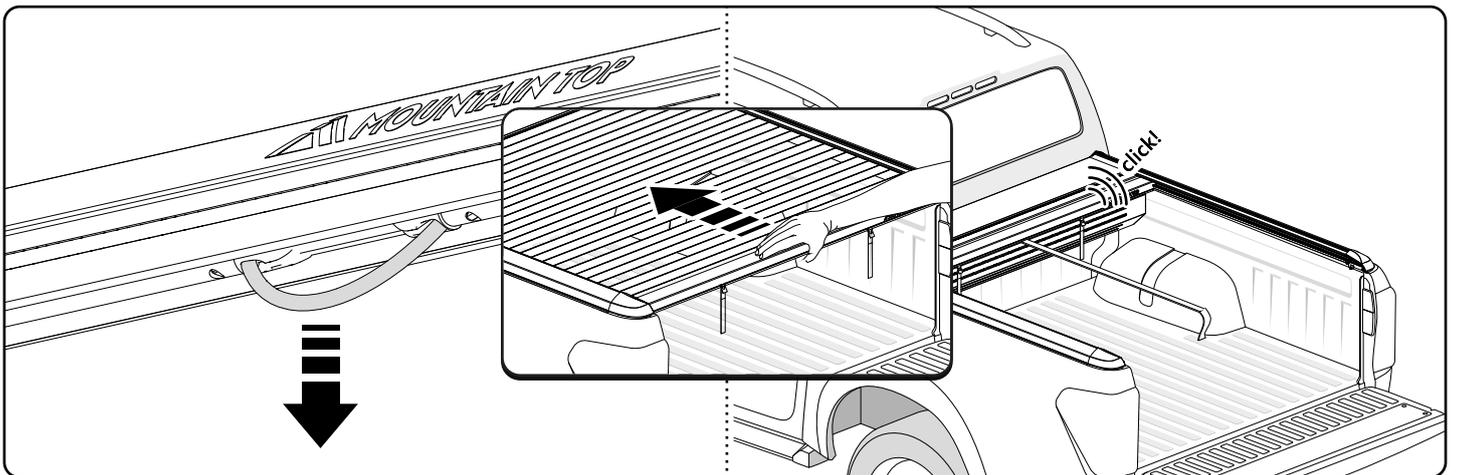


● Open

- When the EV0m roll cover is fully opened, a lock activator is automatically triggered, engaging the locking system.
- For the EV0m roll cover to close correctly, the locking system must be engaged before the cover is closed.


3 MAINTENANCE

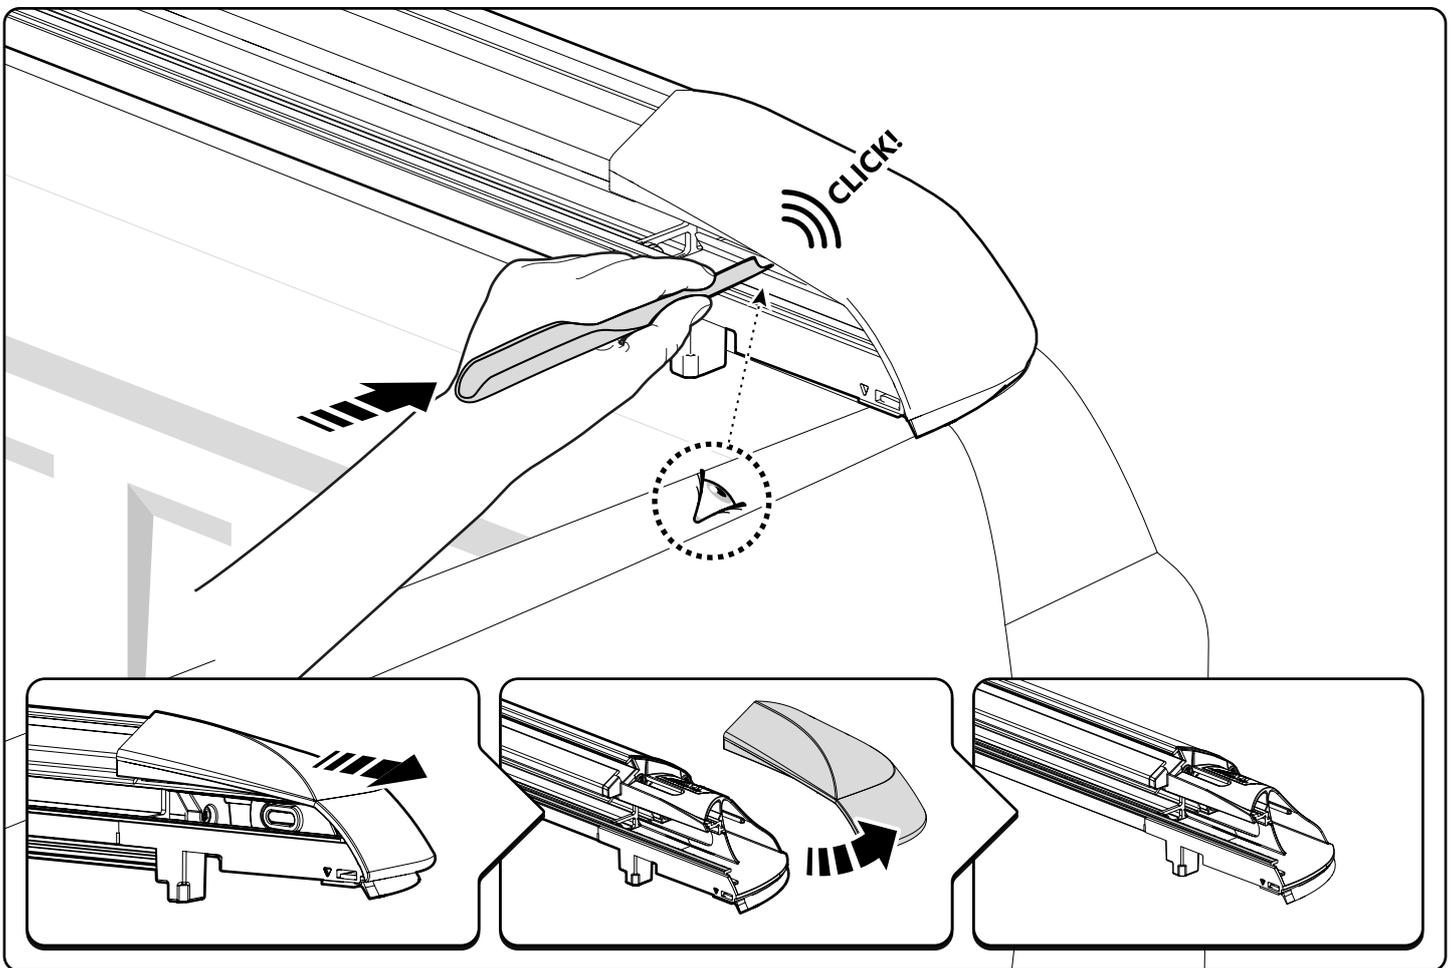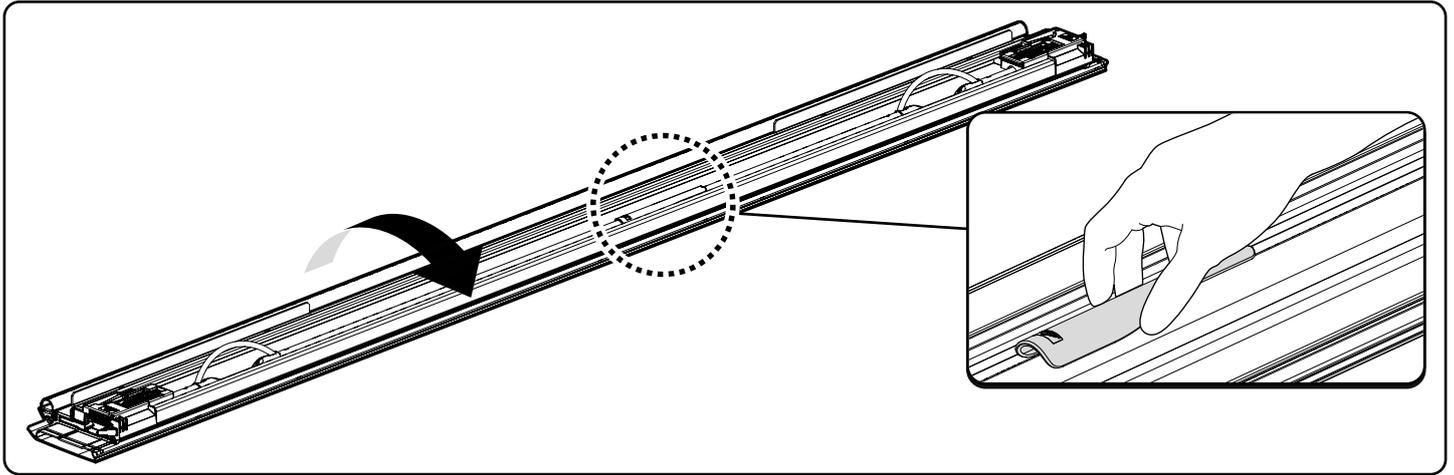


- Use the multi tool to remove the plastic covers on the side profiles.

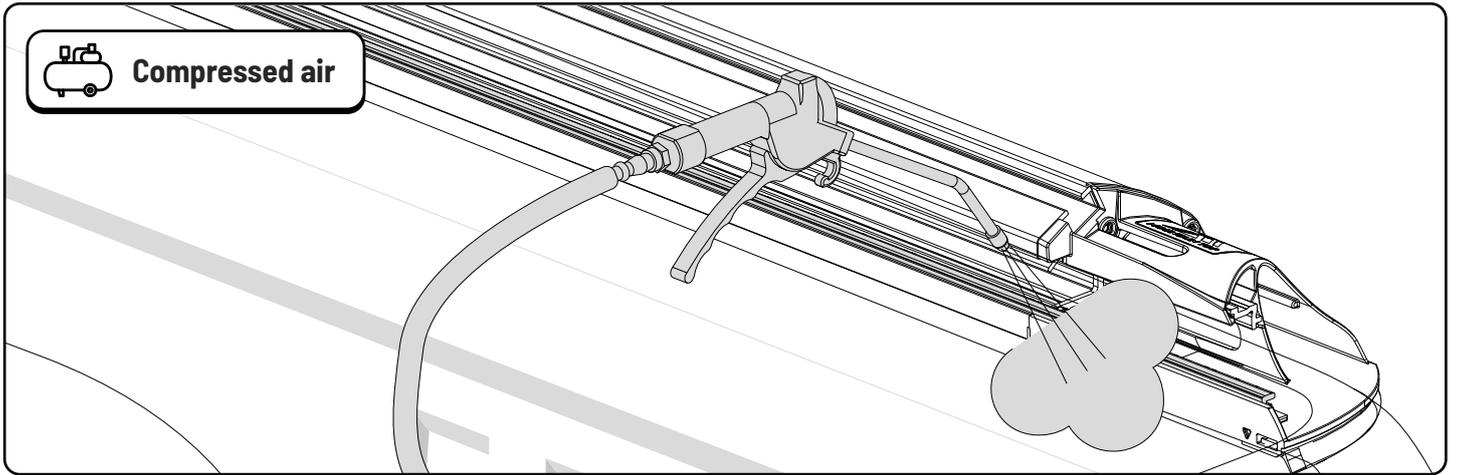


- Remove dirt and debris using compressed air.

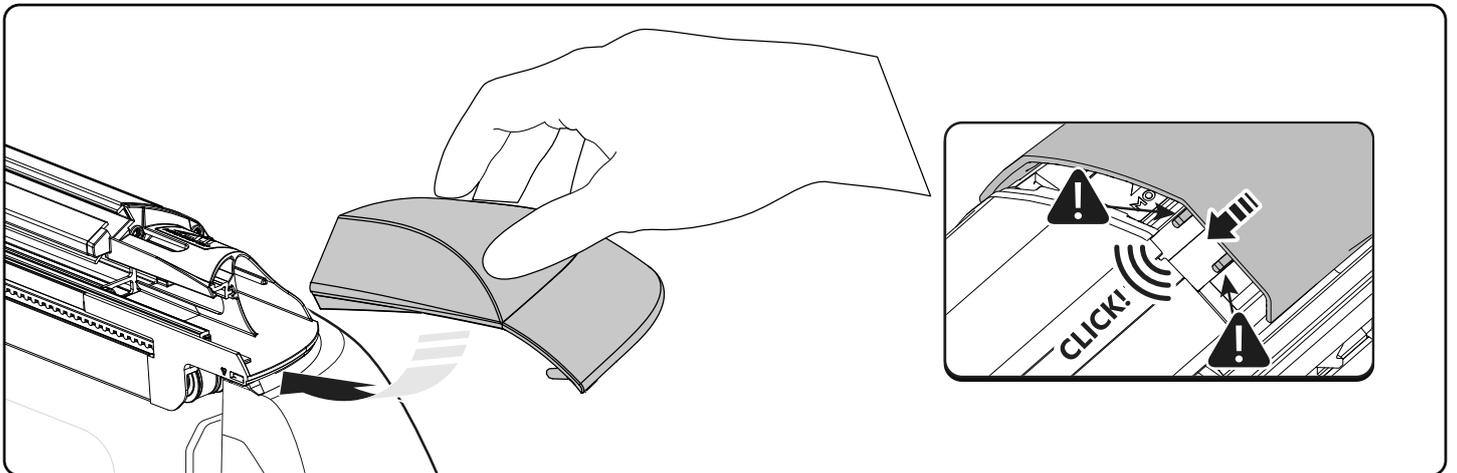


- Mount plastic covers.

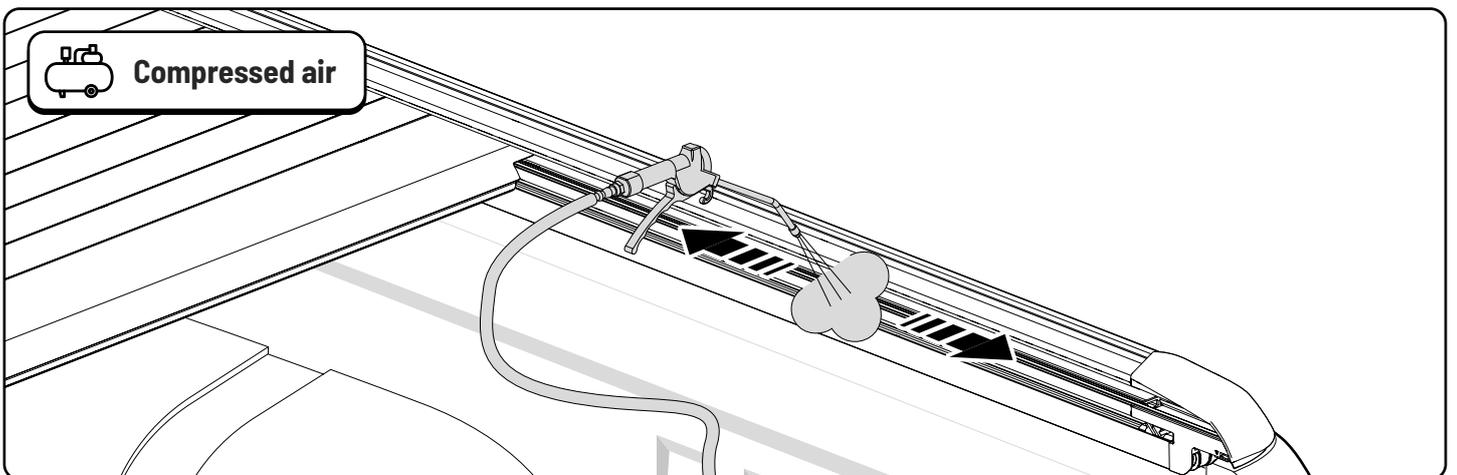


- Clean the side profiles.

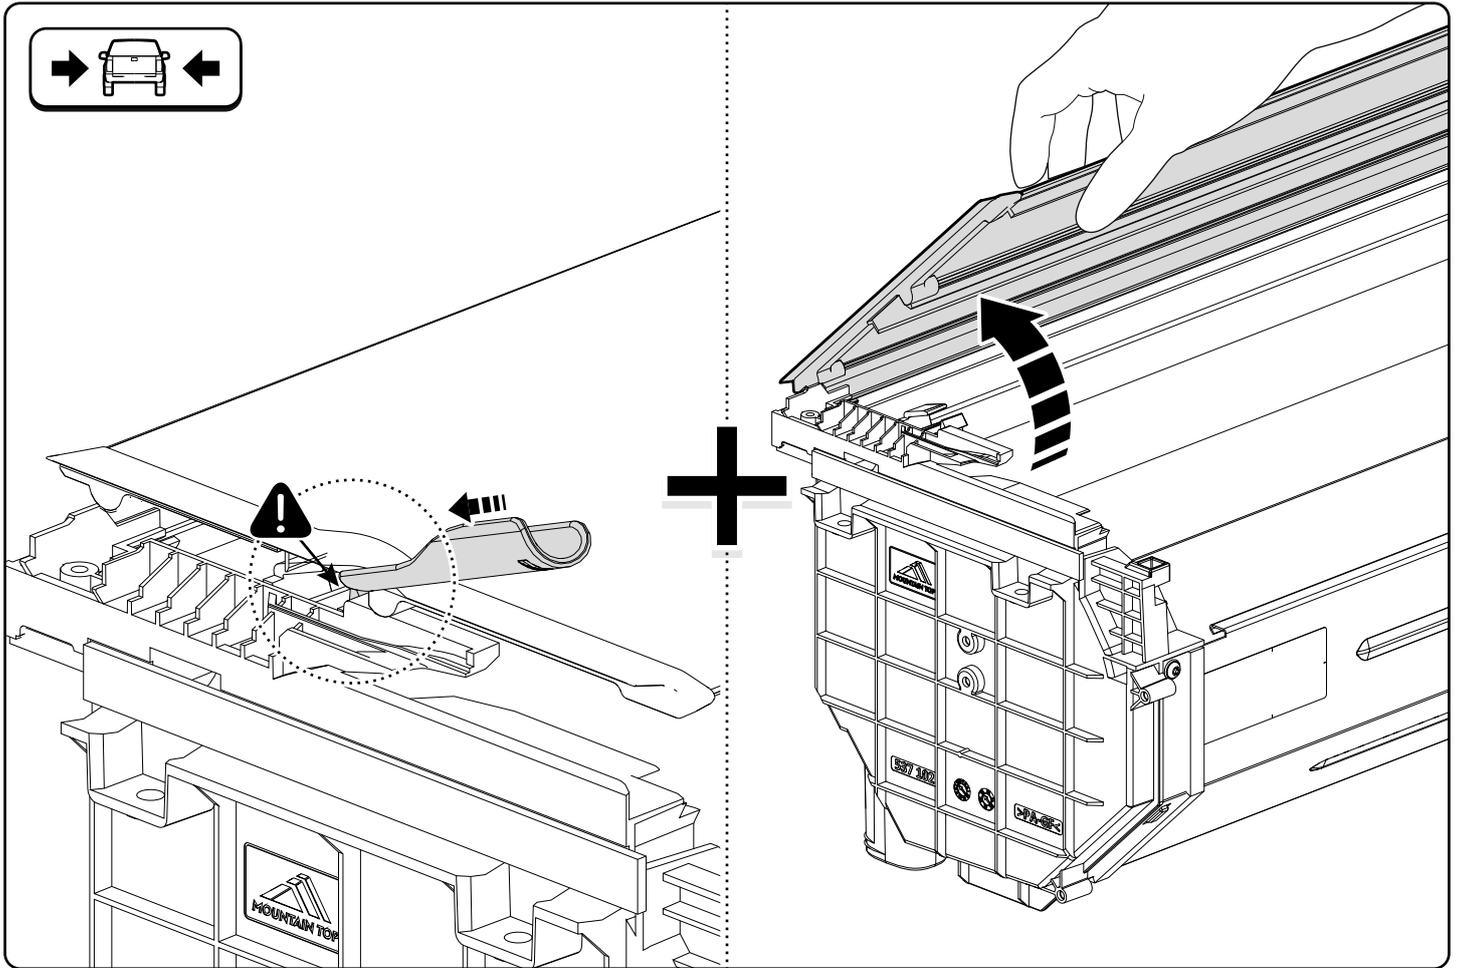


- Open the canister.

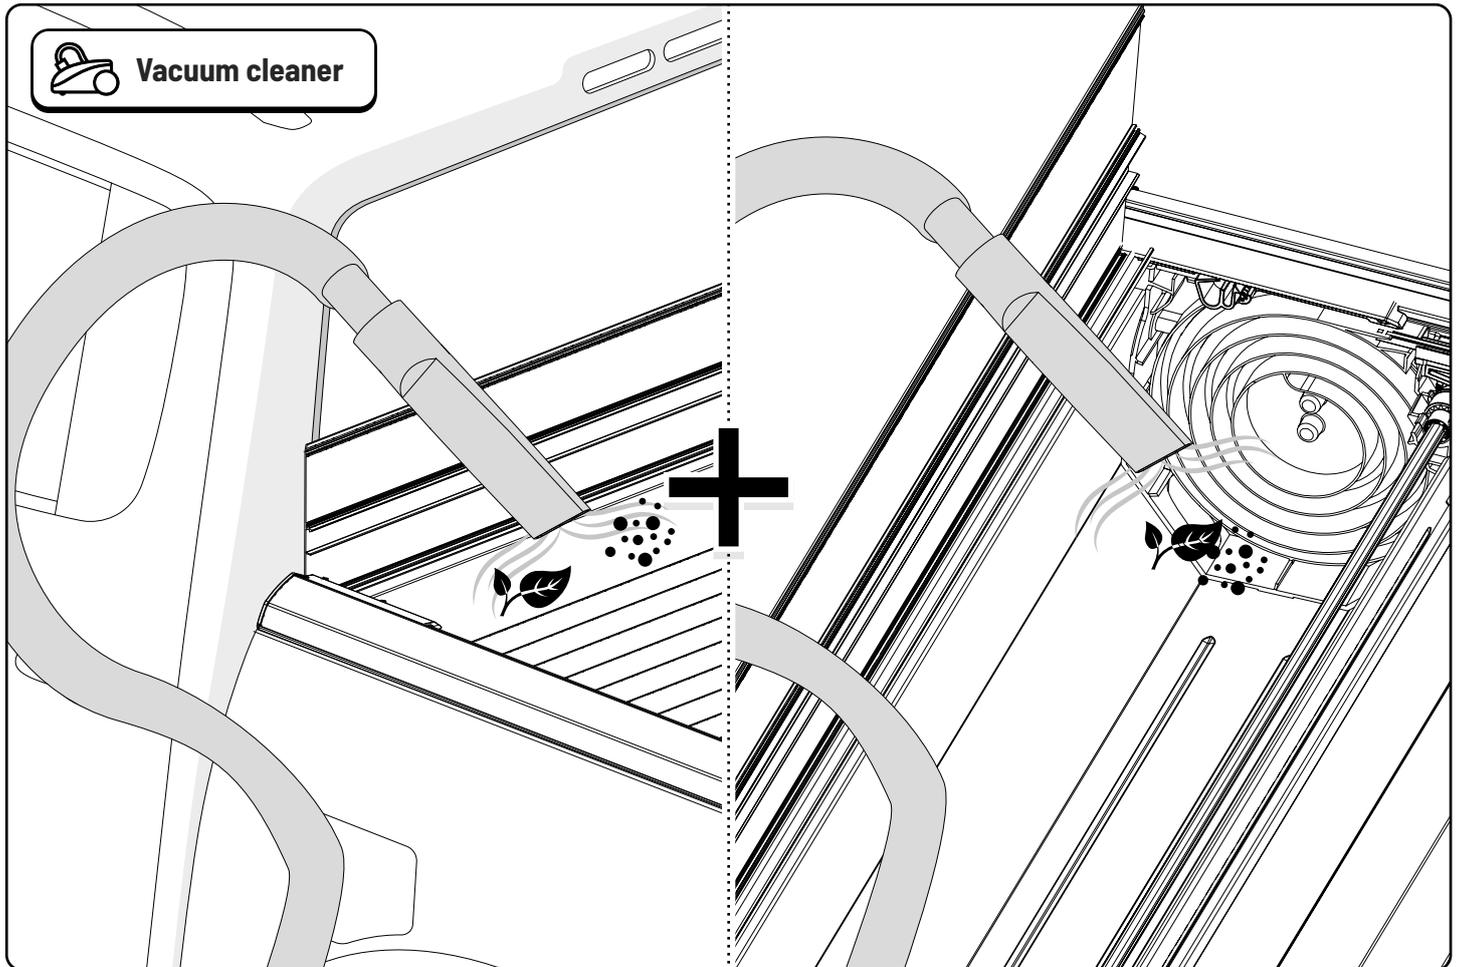


- Clean the canister.

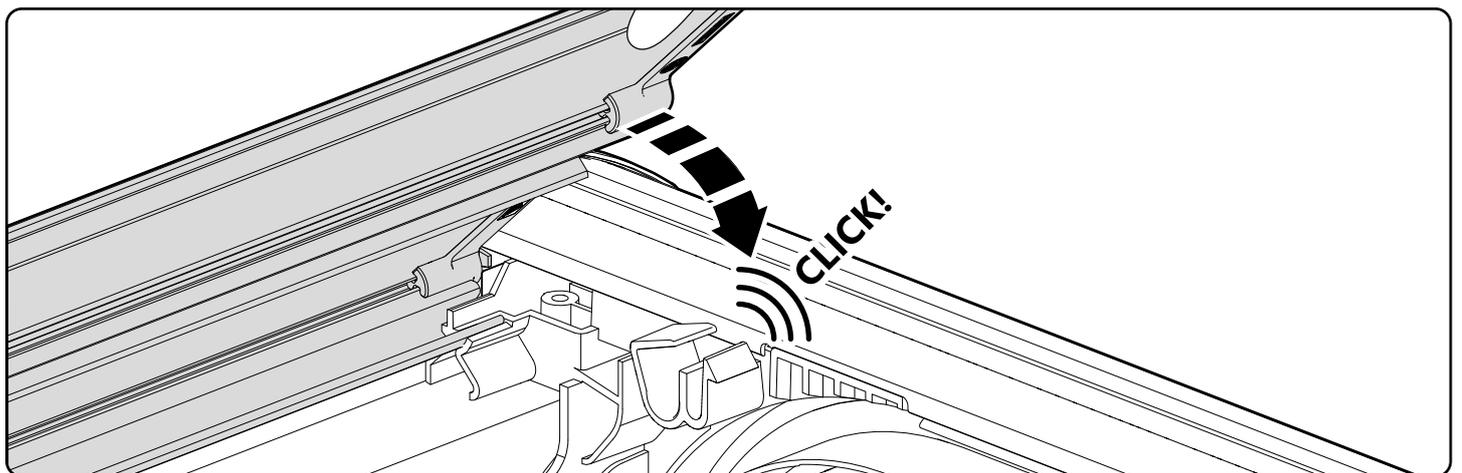


- Close the canister.


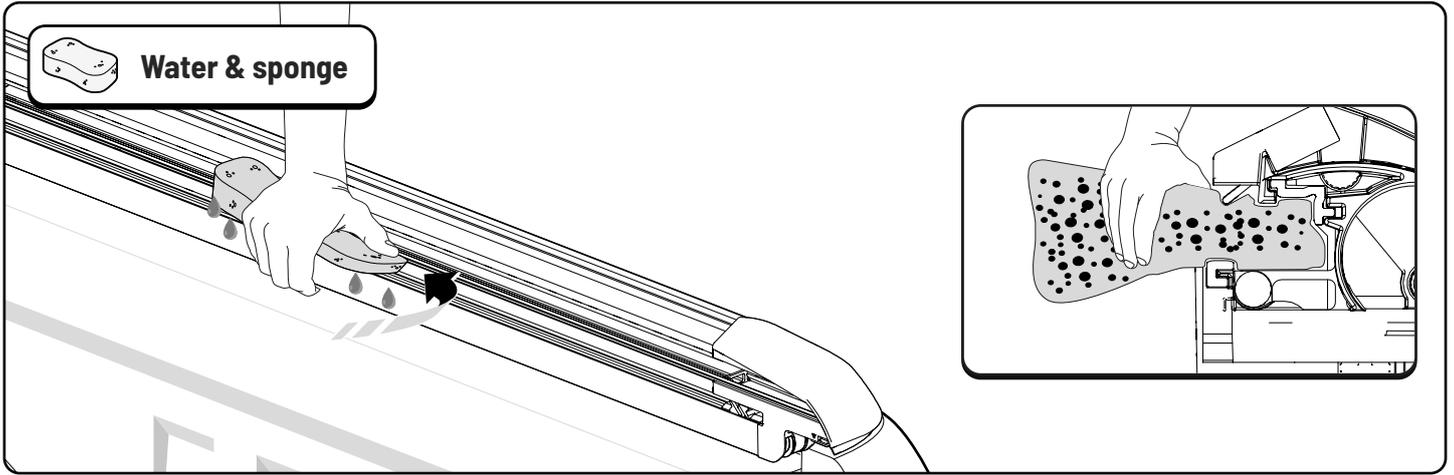


- Clean the drainage channels on the side profiles.

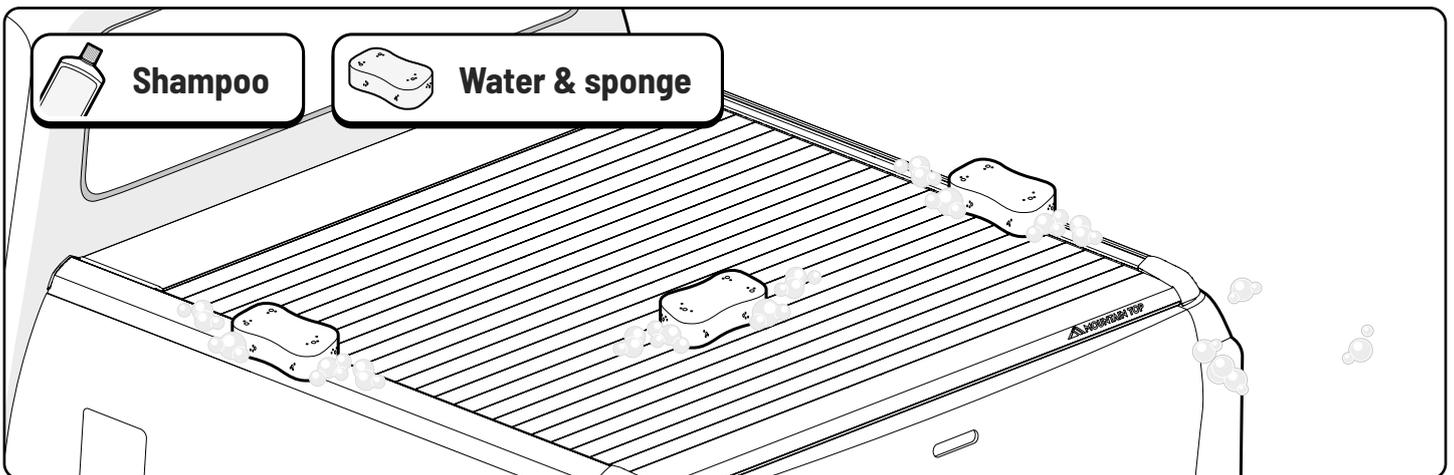

- The EVO roll cover should be cleaned regularly.

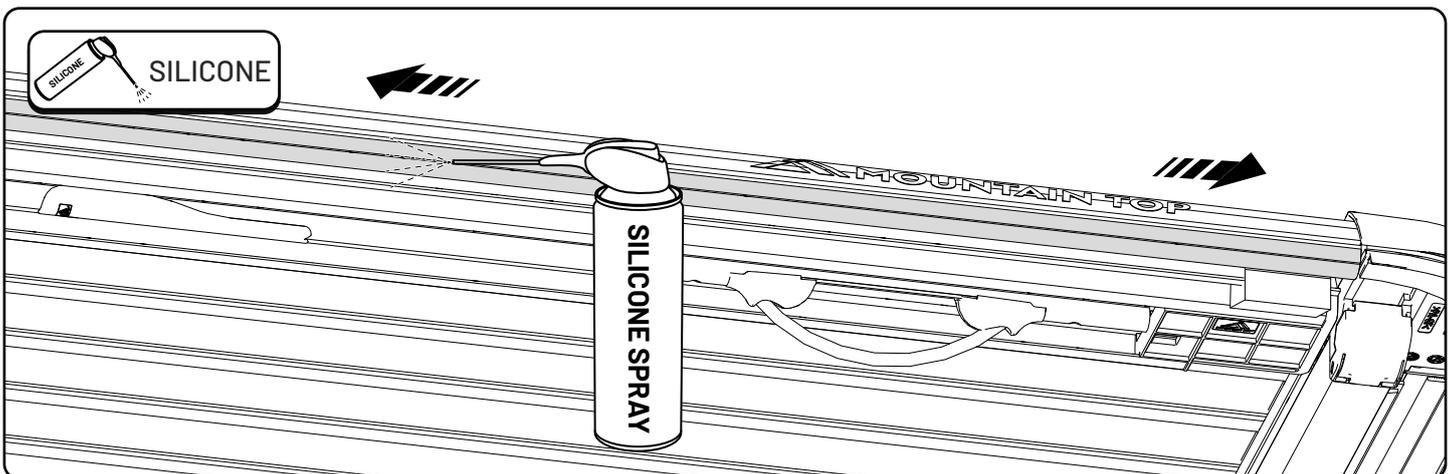


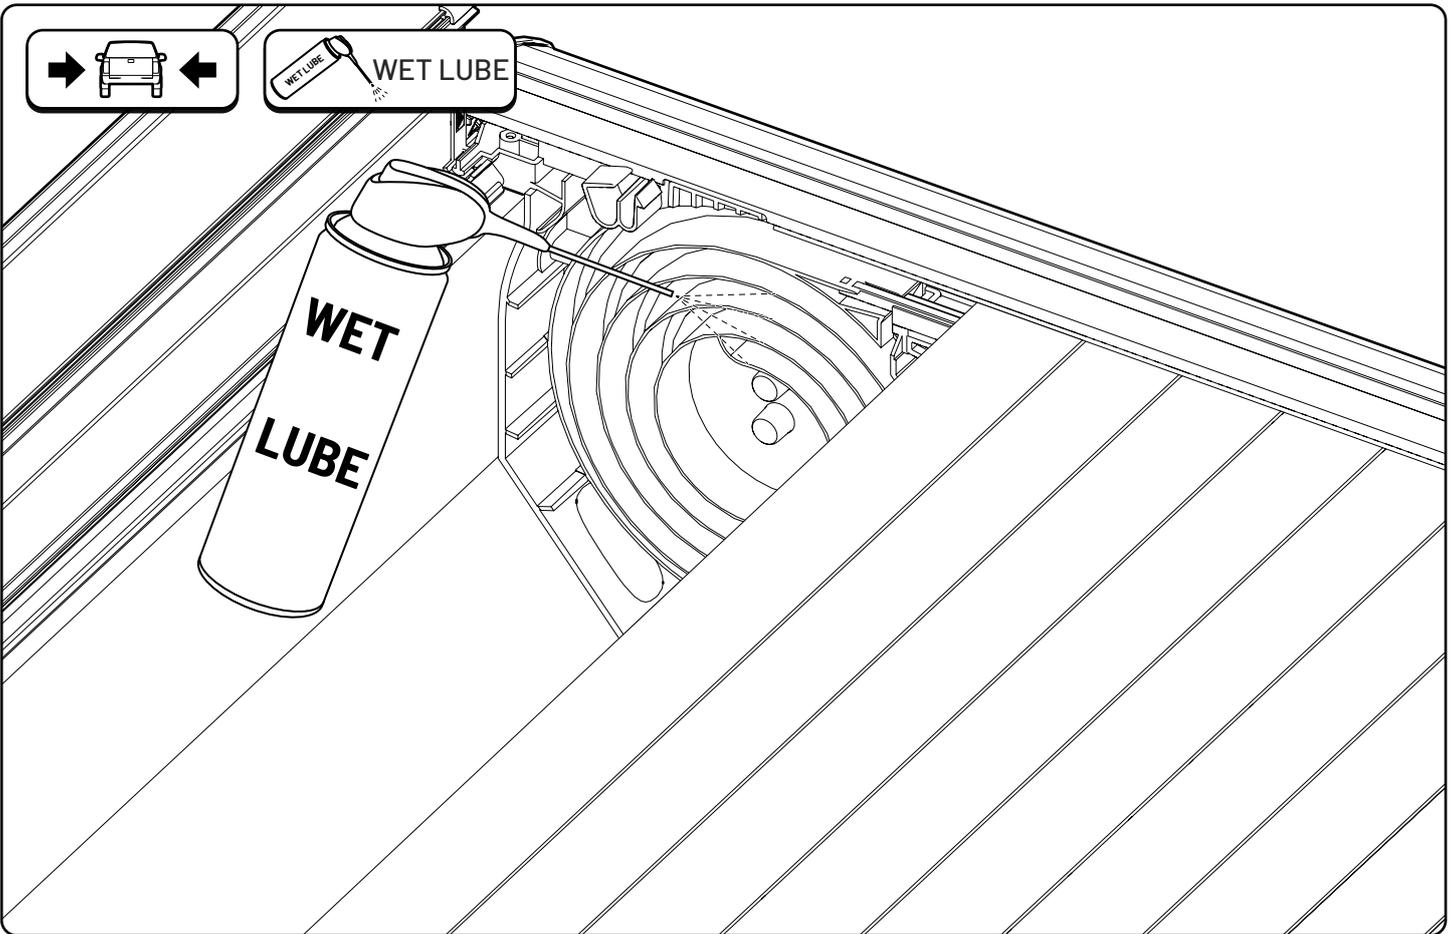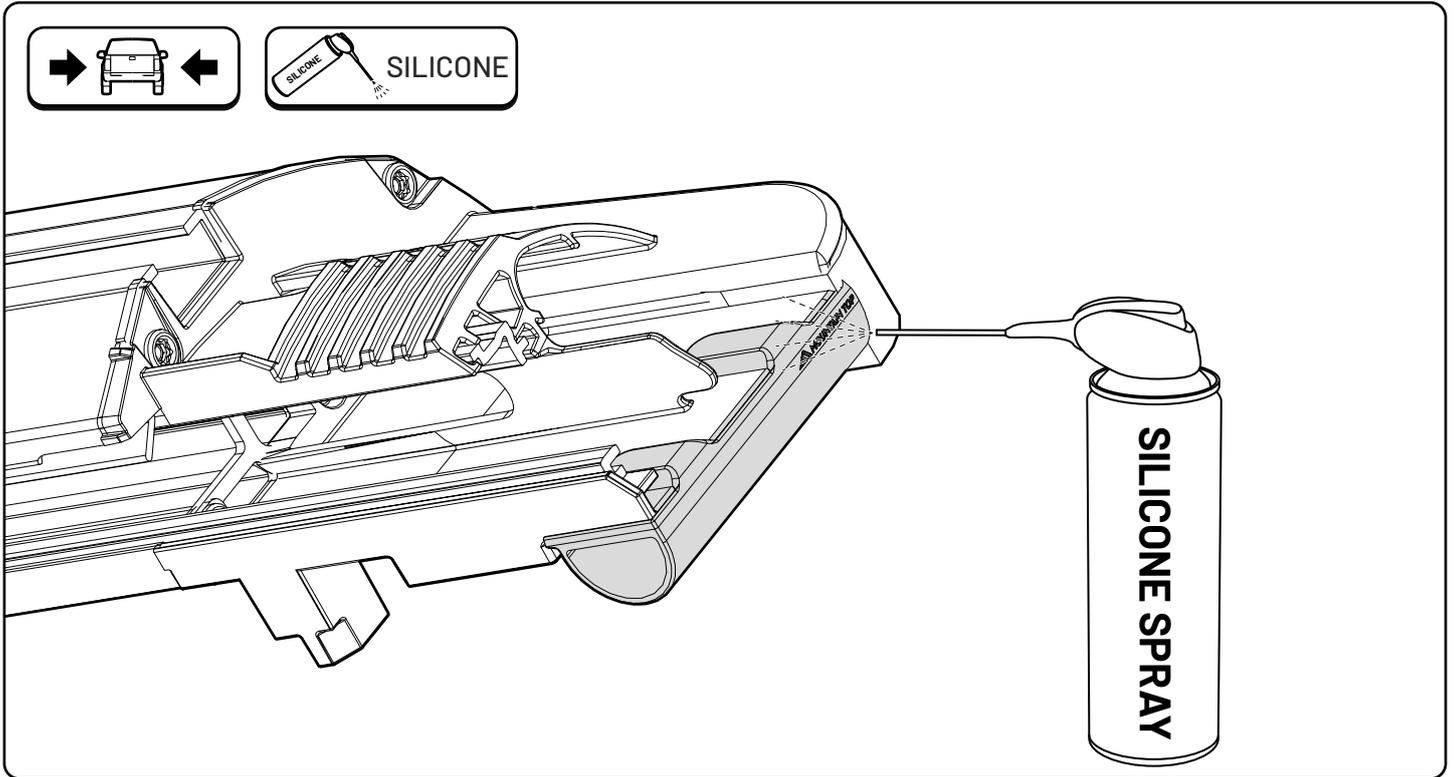


- Regularly, and following cleaning, spray the inside of the canister ends with a PTFE free all-conditions wet lube product.

4


CHECK MEASUREMENTS MAINTENANCE

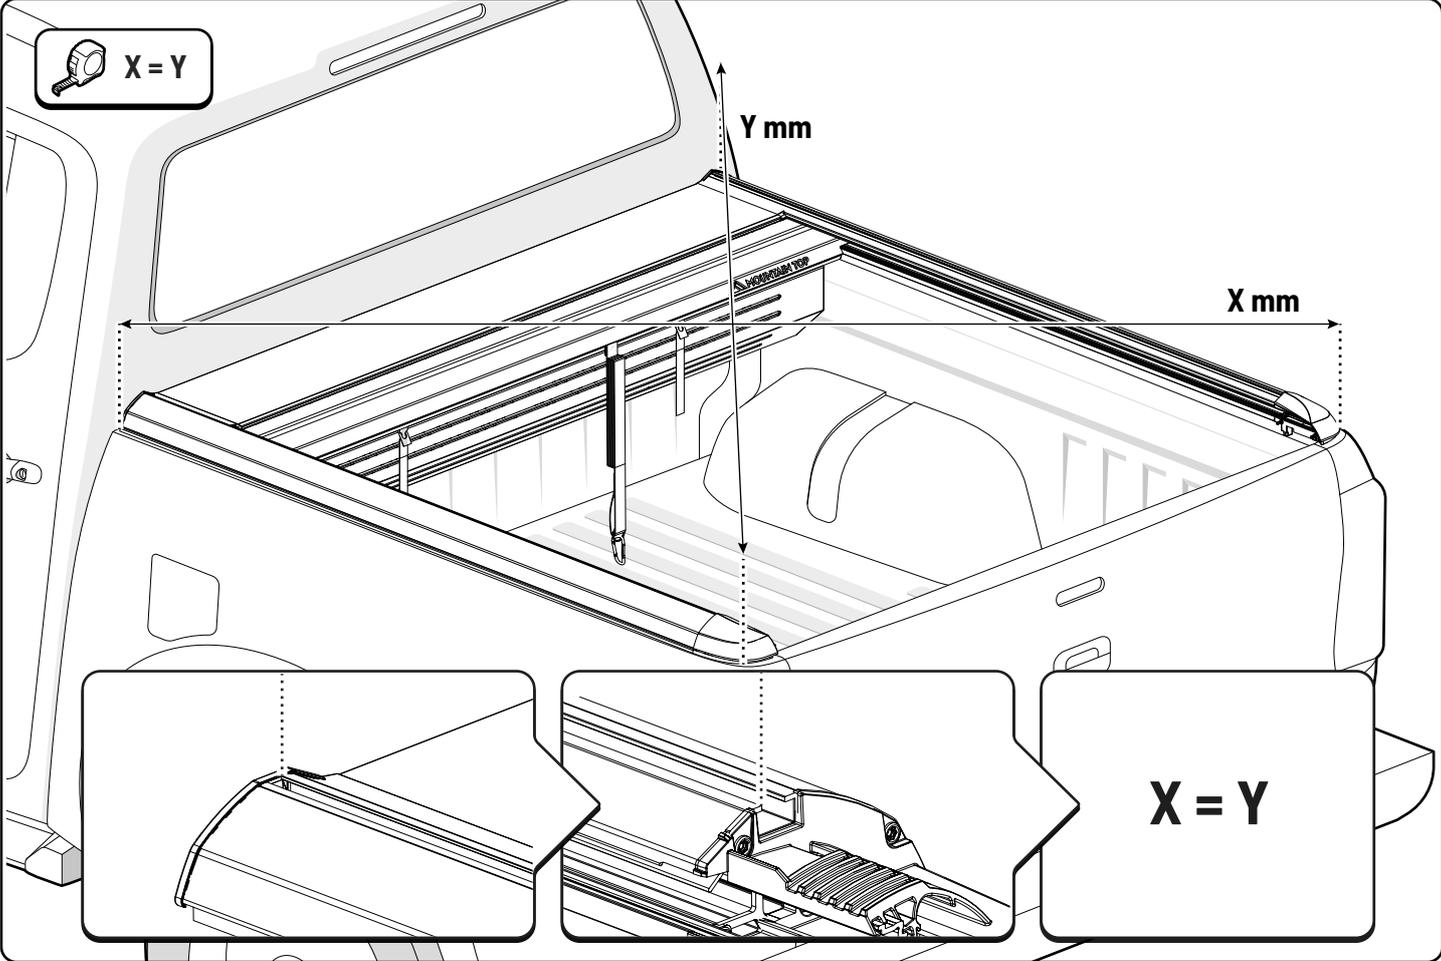

- Ensure the cross measurements are identical.

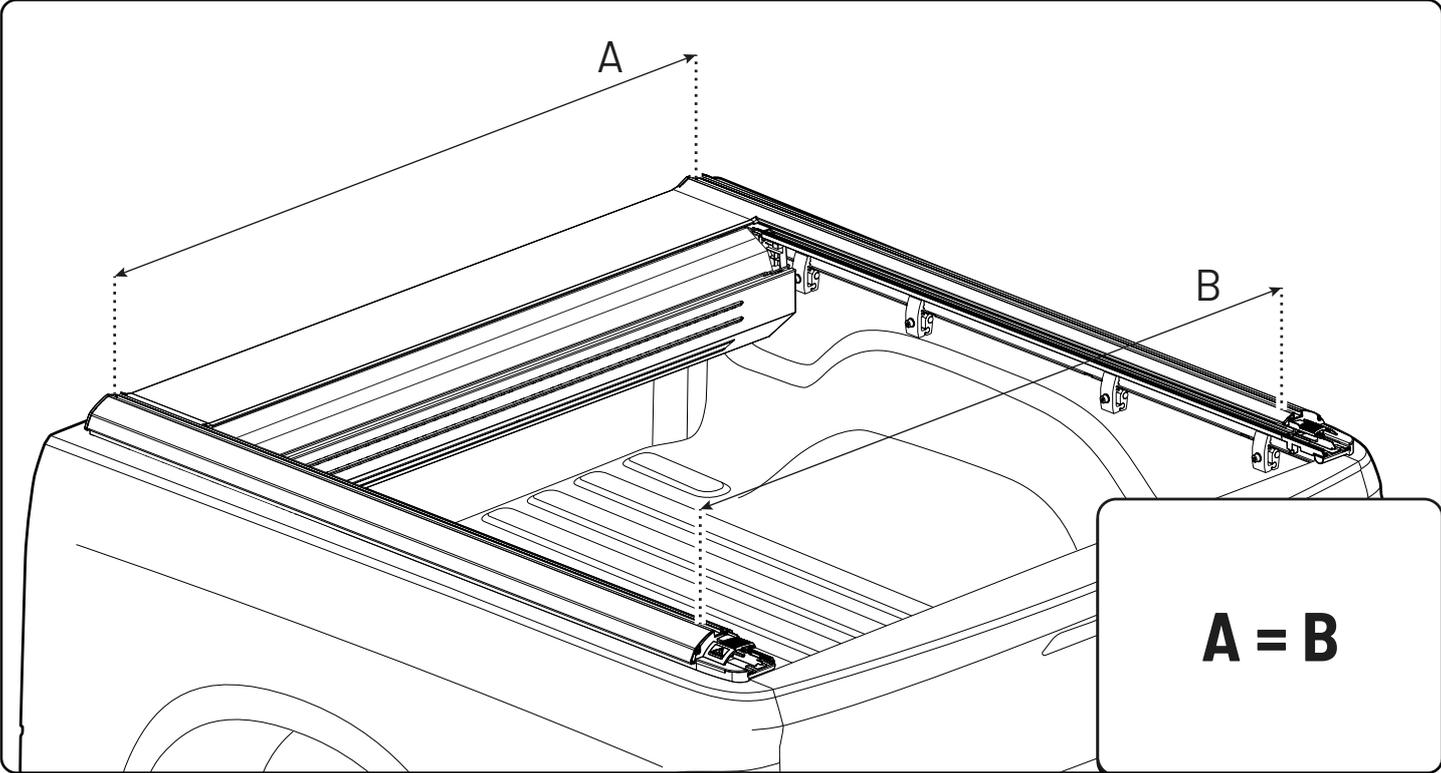


5 CLAMPS

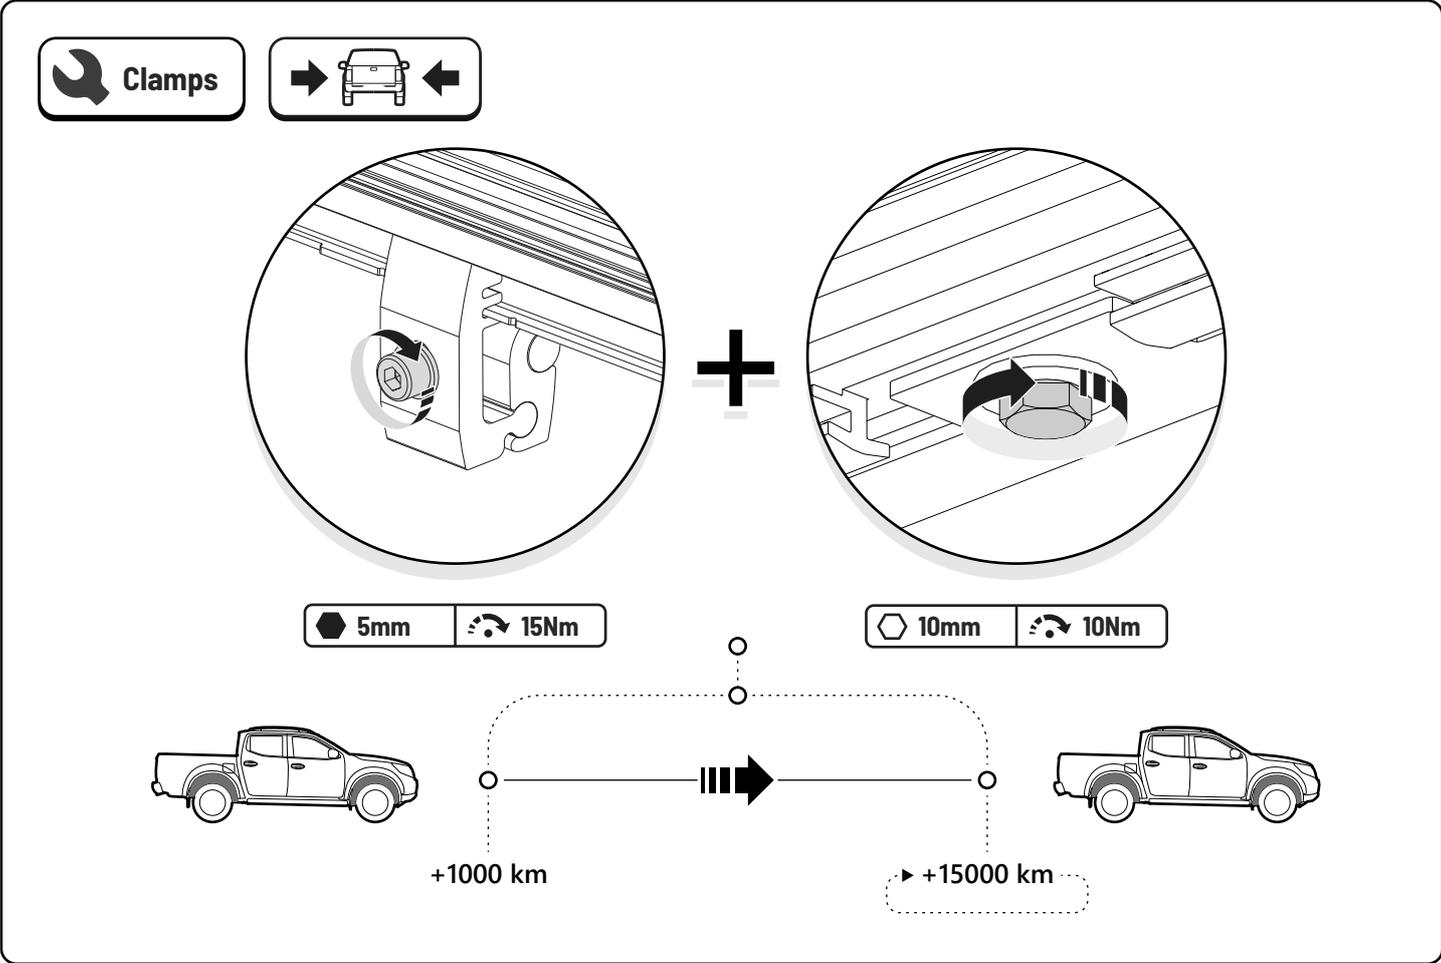

- Re-tighten the clamps to 15 Nm 1000 km after first use. And then every 15.000 km

6

MINIMUM MAINTENANCE REQUIREMENTS

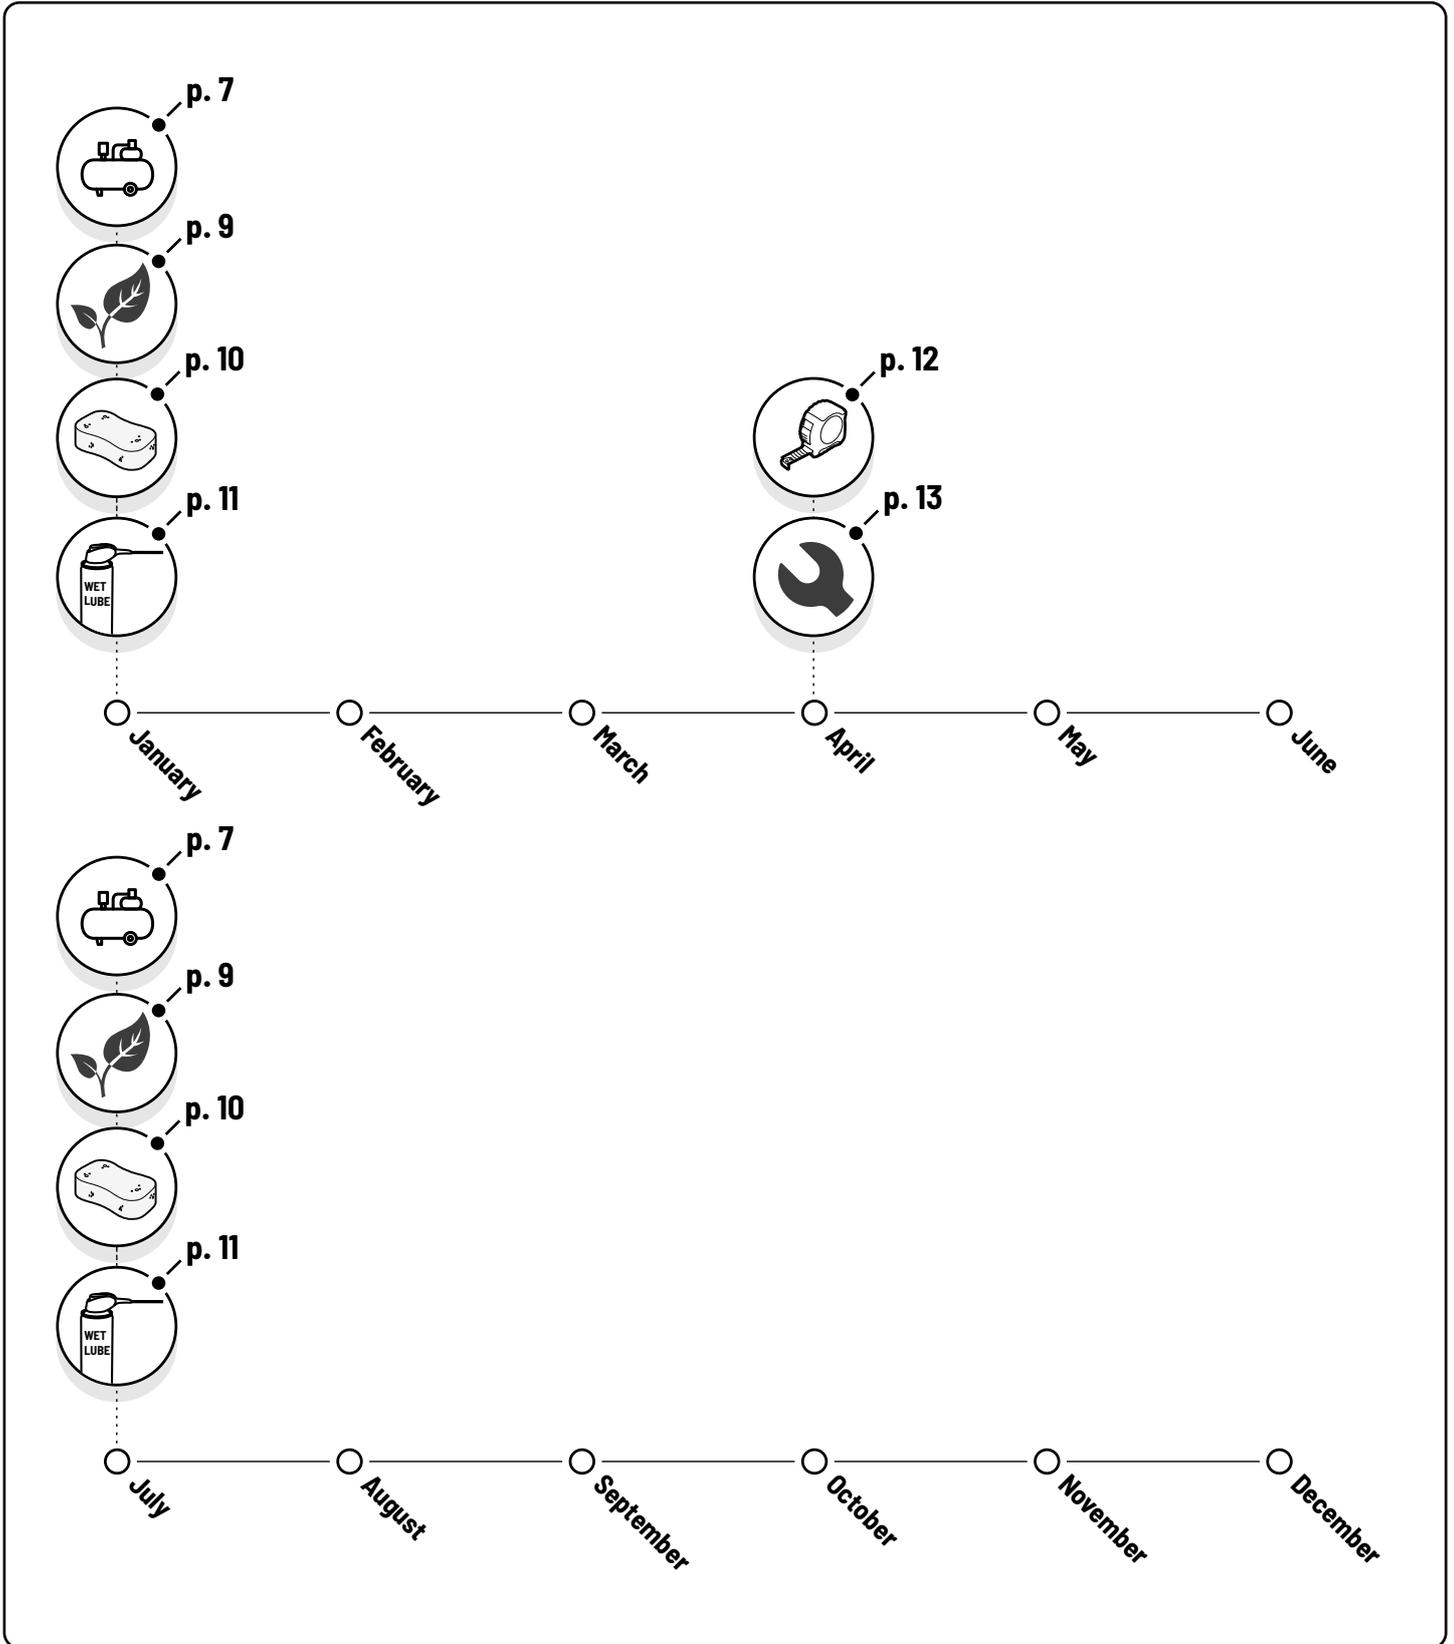

- Maintenance requirements and frequency depend on the actual usage of the roll cover and the environments and elements that it is exposed to.
- Clean and lubricate the cover accordingly to ensure the best possible operation and function.



Customer Service	+45 4810 2950 (08:00 - 16:00 CET)
Support	info@mountaintop.dk
Website	www.mountaintop.dk
Address	Pedersholmparken 10, 3600 Frederikssund, Denmark