


VelociRAX




Rack'em Fast

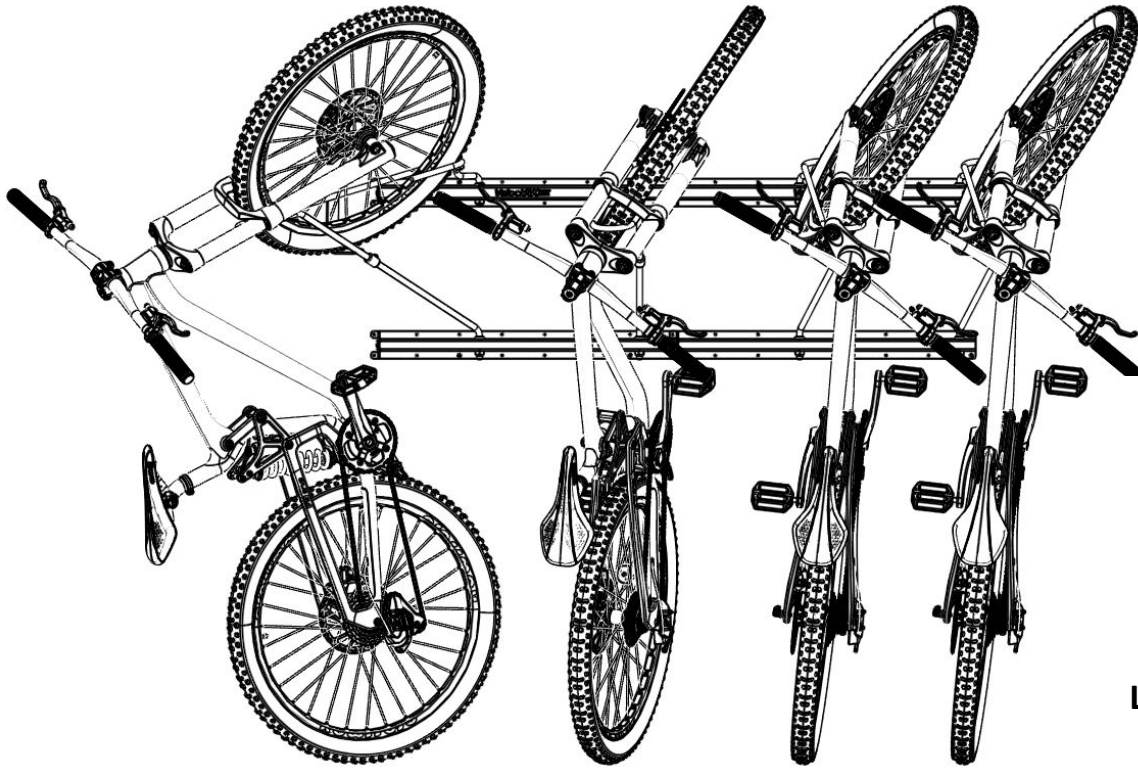

Latest instructions
and videos:

[www.velocirax.com/
pages/assembly](http://www.velocirax.com/pages/assembly)


Tilt & Pivot Wall Rack, Instruction Manual

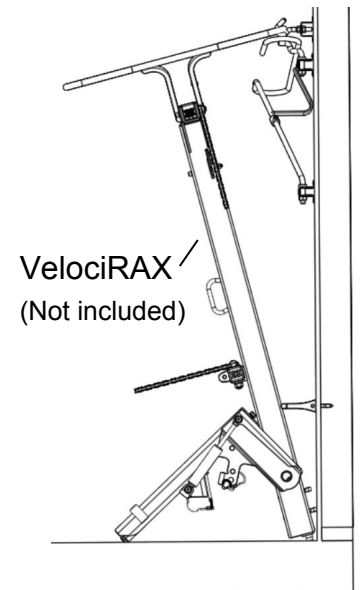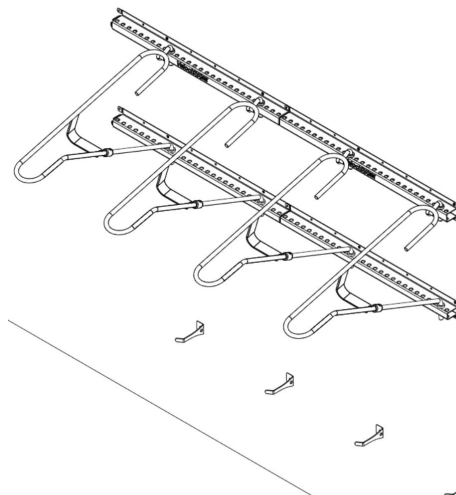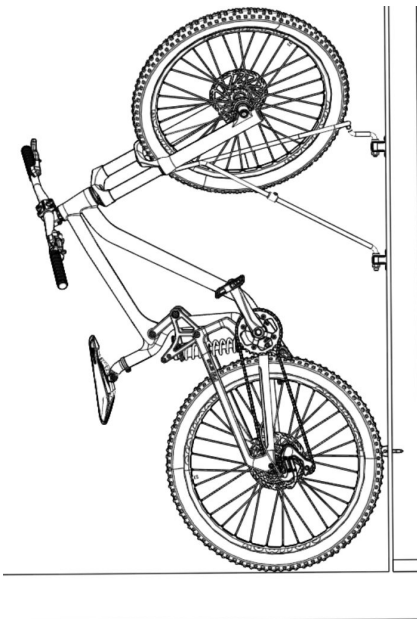


Easy Bike Storage with and without the VelociRAX

PACKAGE CONTENTS

Box 1. Tilt and Pivot Wall Rack Components

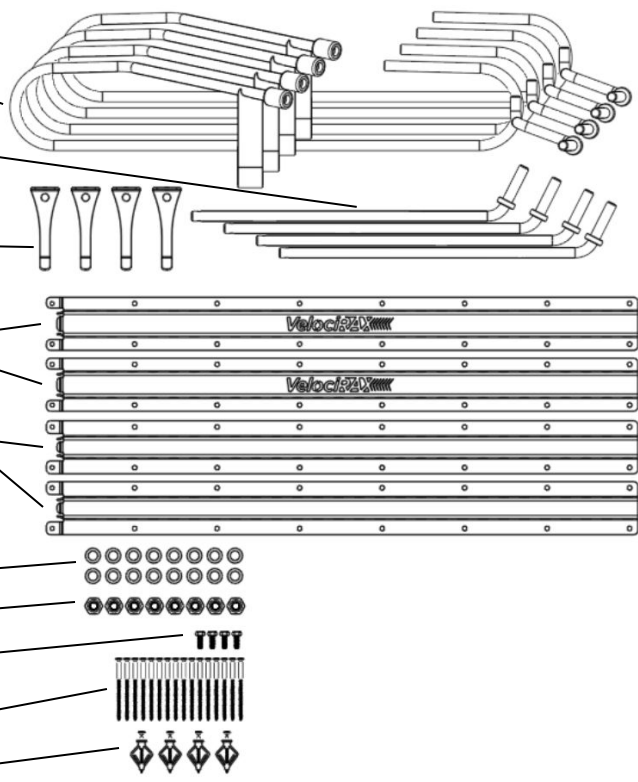1. (2 or 4) Top Tire Basket
 2. (2 or 4) Lower Support Arm
 3. (2 or 4) Rear Tire Rests
 4. (1 or 2) Top Pivot Bracket
(with VelociRAX logo)
 5. (1 or 2) Bottom Pivot Bracket
 6. Assembly hardware
 - a. (8 or 16) Washers
 - b. (4 or 8) Nuts
 - c. (2 or 4) Bolts
 - d. (8 or 16) Wood Screws
 - e. (2 or 4) Drywall anchors
- 

TILT & PIVOT WALL RACK DIAGRAM

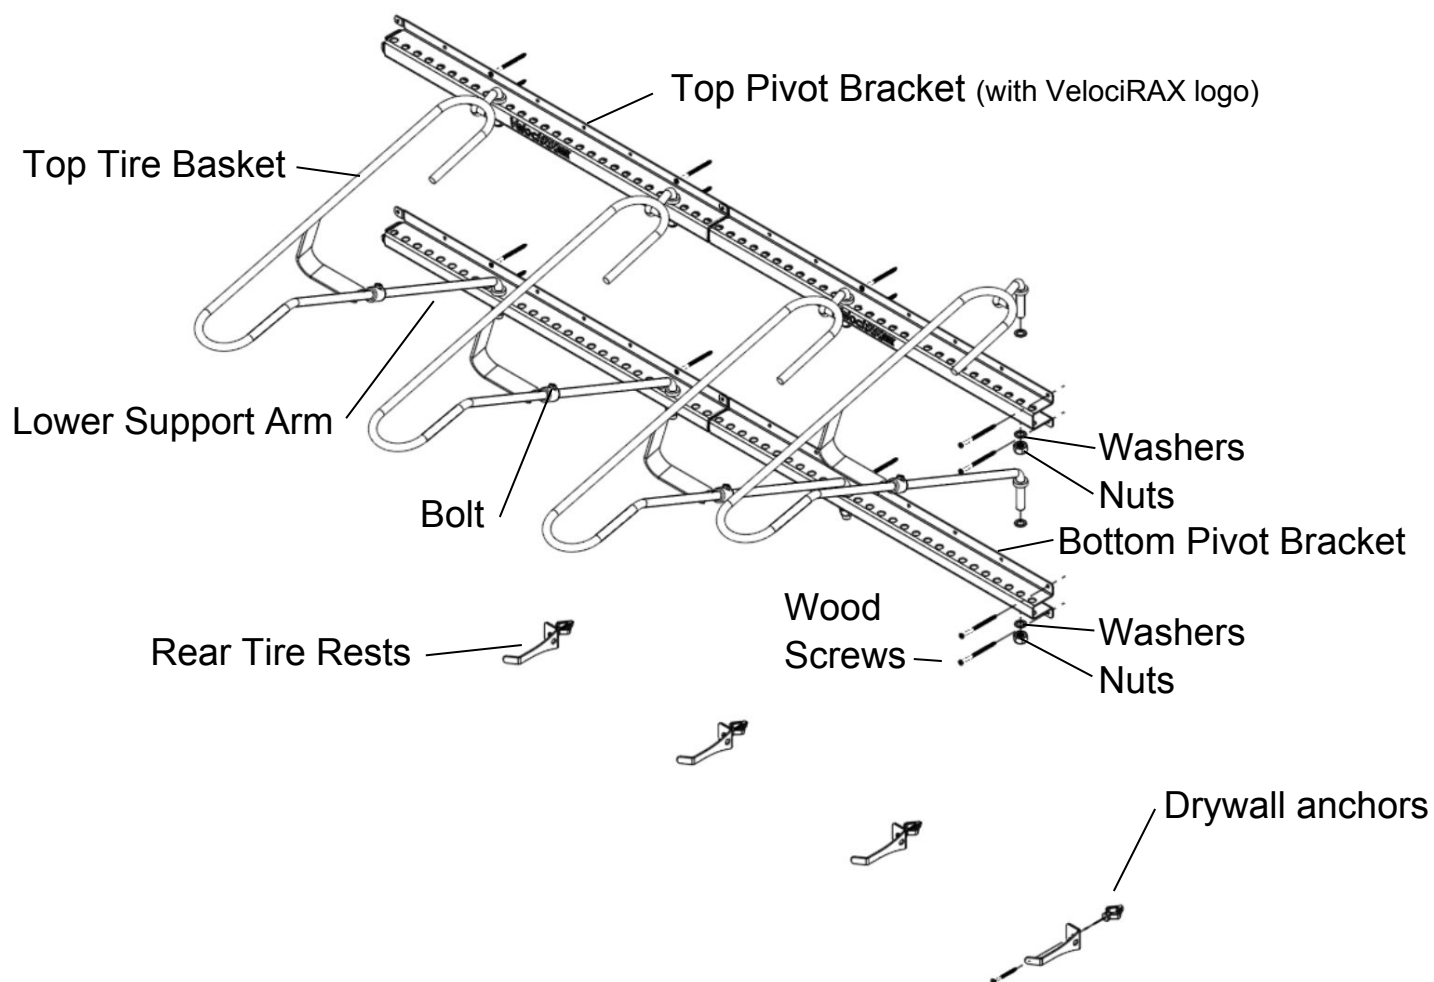

TOOLS REQUIRED FOR ASSEMBLY

Wrench
or socket



- 1 X 10mm
- 1 X 19mm

Alternate
• 1 X



- 1 X #2  

ASSEMBLY INSTRUCTIONS


Latest instructions and videos: www.velocirax.com/pages/assembly

Read all instructions carefully before proceeding

See Step 10 when installing in the same location as a VelociRAX Bike rack

1. Measure the Wheelbase of your longest/largest bike


Your longest Wheelbase bike will determine mounting height of the Bracket

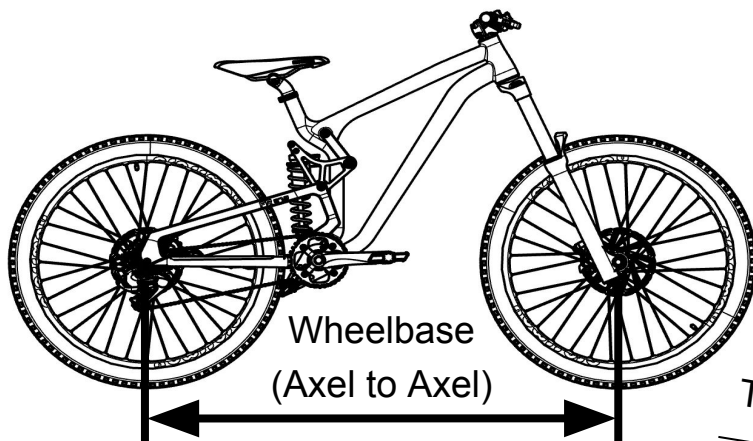

Wheelbase
(Axel to Axel)

Longest Wheelbase + 10"



2. Secure Top and Bottom Pivot Brackets to studs in existing wall

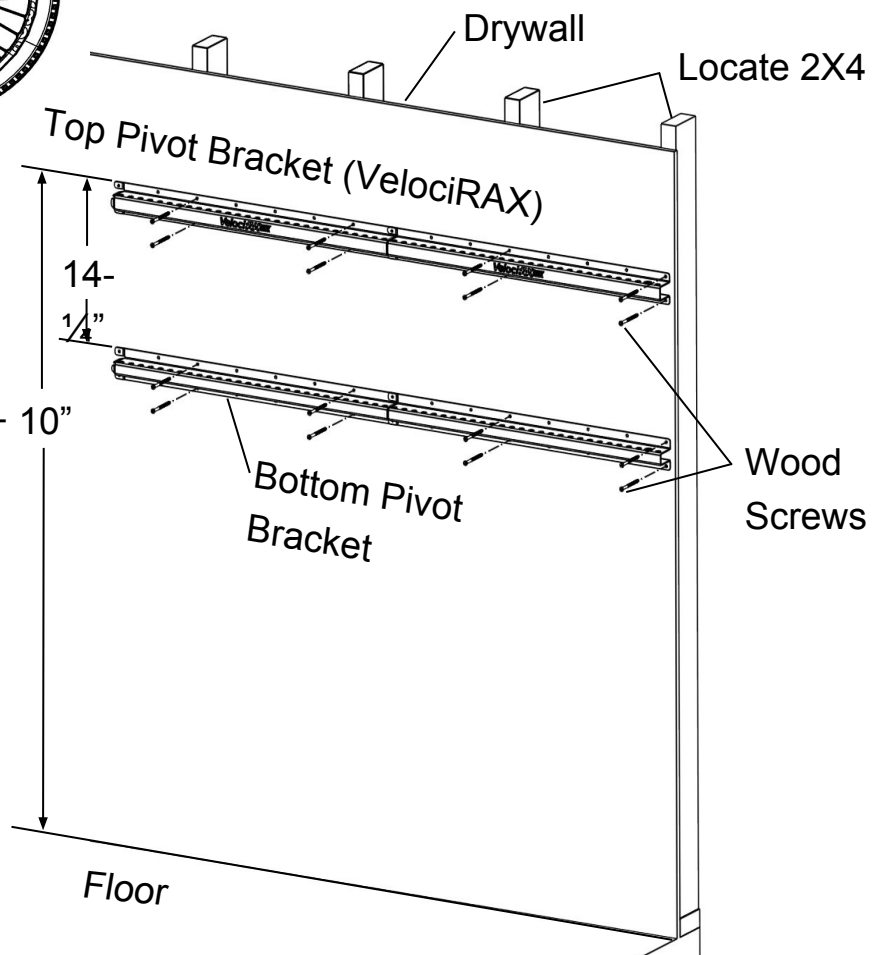



Latest instructions
and videos:
[www.velocirax.com/
pages/assembly](http://www.velocirax.com/pages/assembly)

ASSEMBLY INSTRUCTIONS - CONTINUED



3. Insert Top Tire Baskets into Top Pivot Brackets at desired spacing with washer

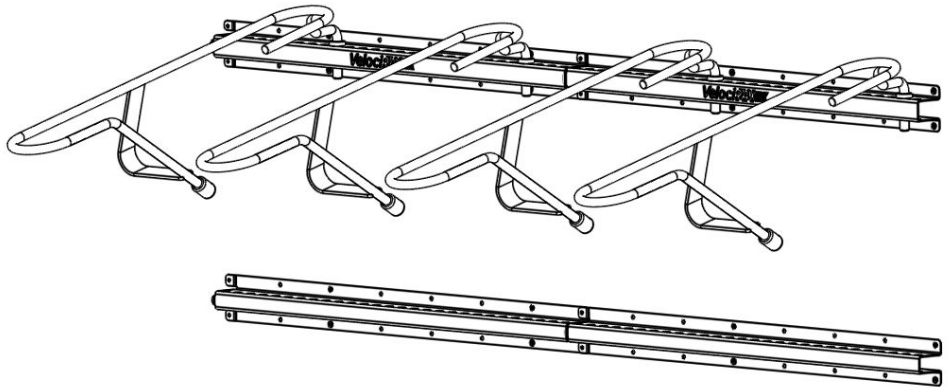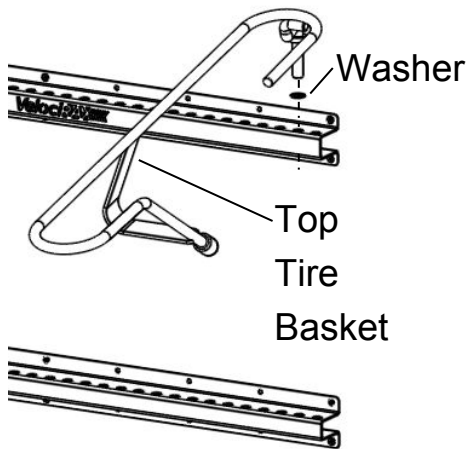

4. Insert Lower Support arm at the same spacing with washer

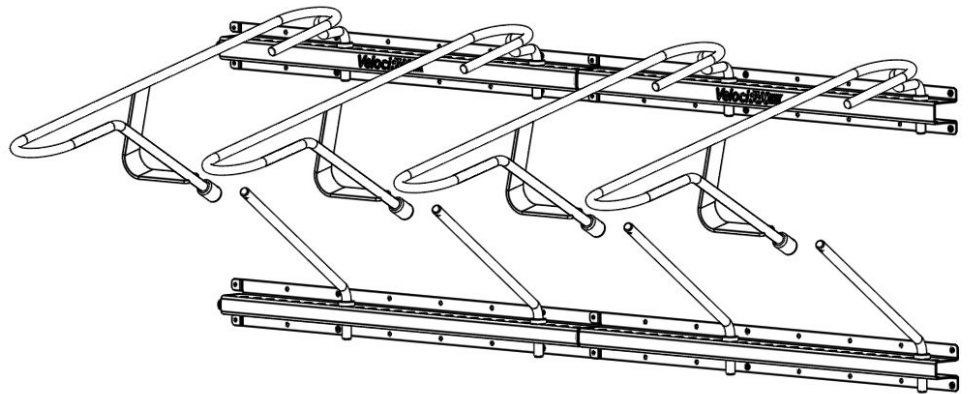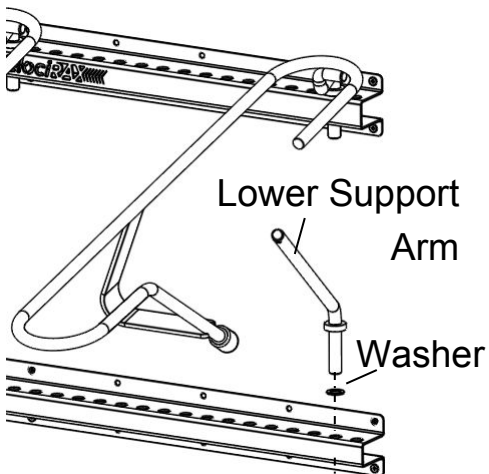


5. Insert Lower Support Arm into Top Tire Basket and secure with Bolt

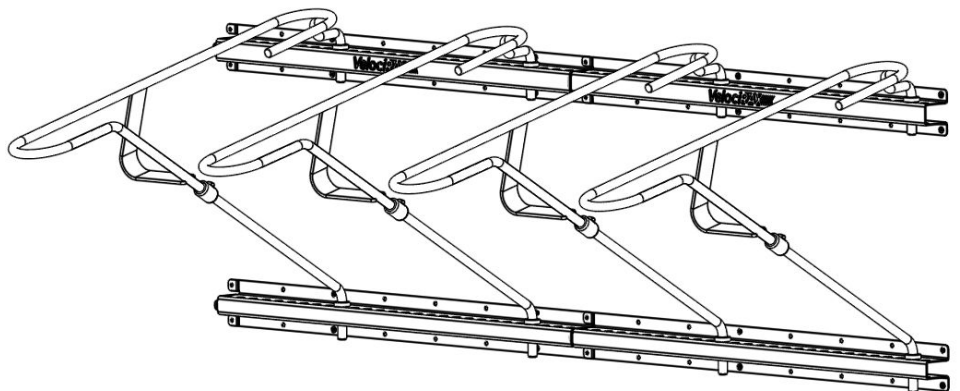
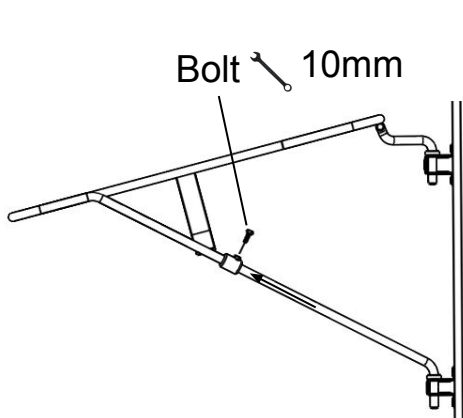


ASSEMBLY INSTRUCTIONS - CONTINUED

6. Tighten Nut with washer enough to provide minimal rotational resistance

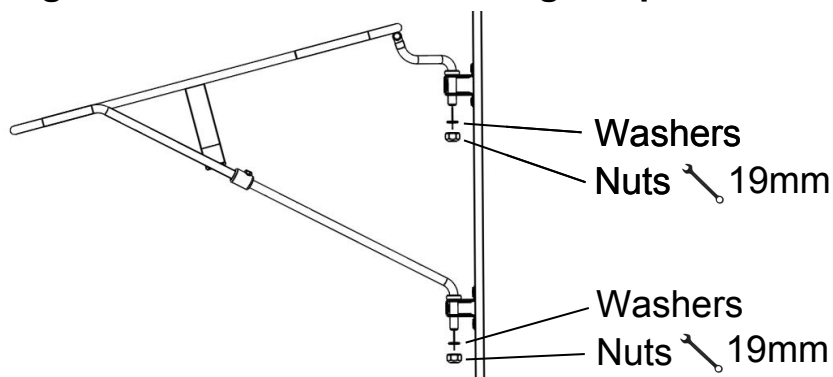


7. (Optional) Secure Rear Tire Stops - Needed if rotating bike to the wall

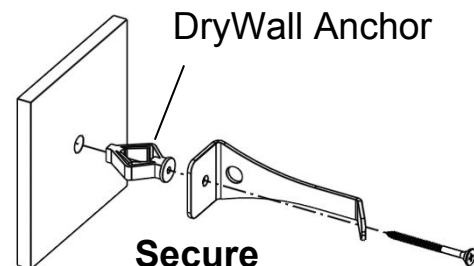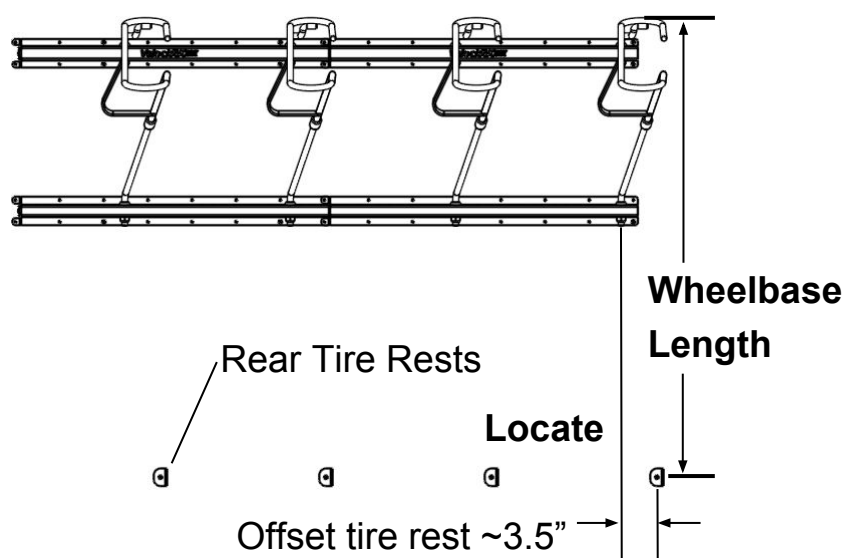

- Drill a 3/8" hole and insert drywall anchor
- Insert screw through bracket and fasten screw (Don't overtighten)

8. Load Bikes

As you load bikes, place the rear tire to the left of the rear tire stop. This allows bikes to stay at the desired rotation angle. Rotate bikes for additional space while loading.

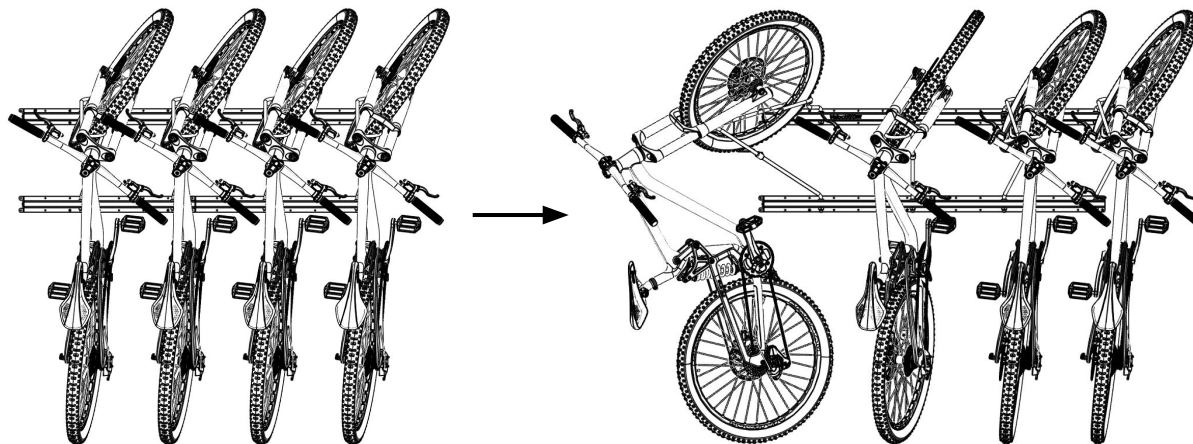




ASSEMBLY INSTRUCTIONS - CONTINUED

9. Continue Stacking Bikes

Continue stacking Tilt & Pivot Racks as needed

Store bikes as close as 10" apart along the whole wall

14" spacing allows maximum repeatable spacing with provide tire baskets

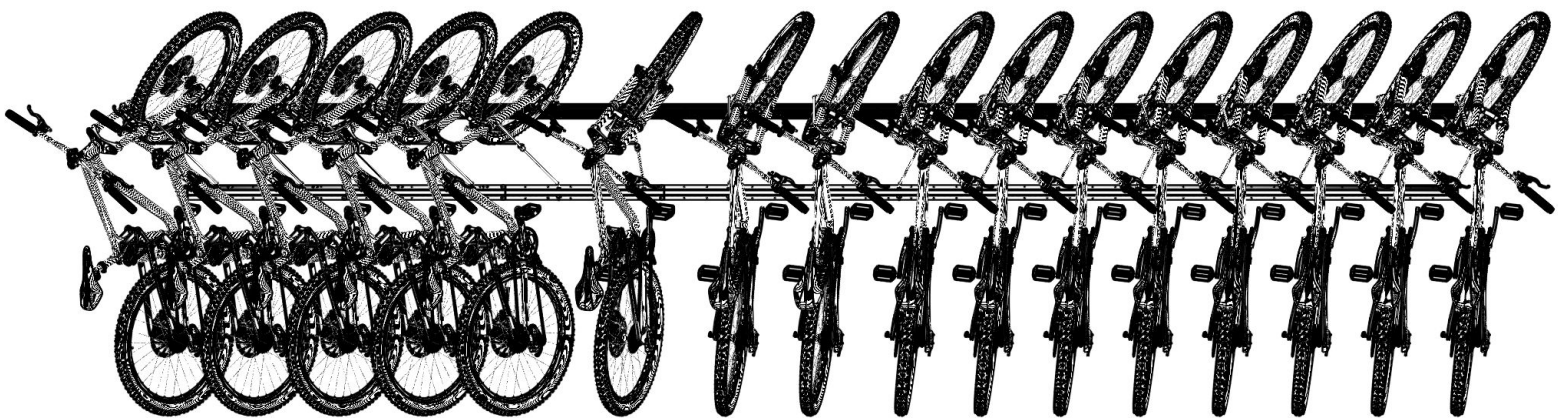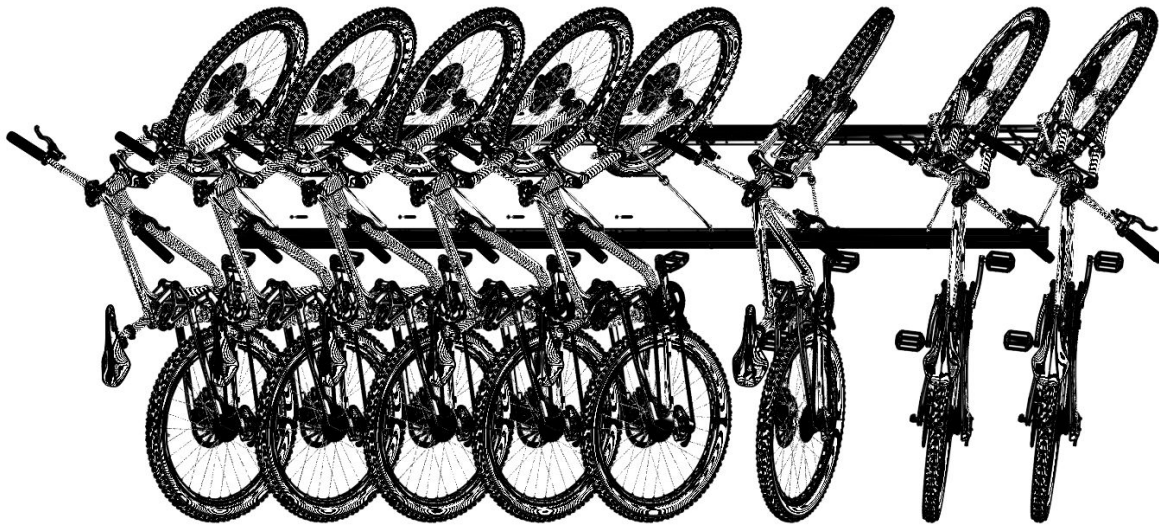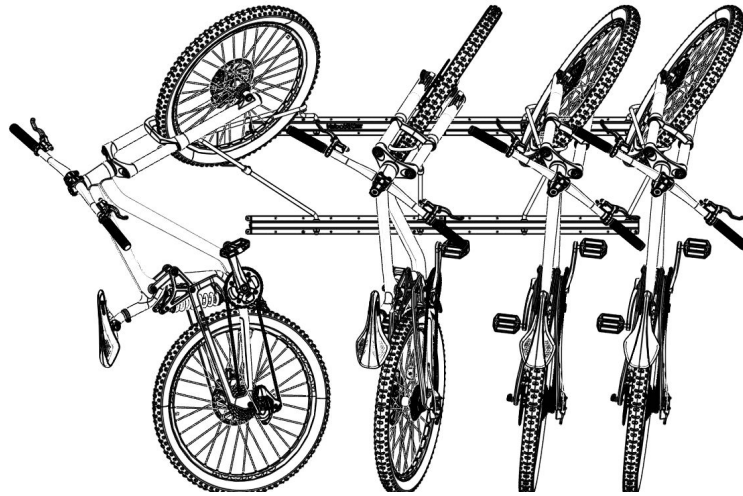


ASSEMBLY INSTRUCTIONS - CONTINUED


10. When Installing in the same location as a VelociRAX Bike Rack

The Tilt & Pivot Wall rack can be placed in the same location as your VelociRAX garage setup. This allows you to put your VelociRAX on your vehicle and then pivot the Wall Rack out to store bikes you may not be traveling with. To do this mount as follows:


Mount the rack 1- $\frac{1}{4}$ " below the VelociRAX Garage Bracket

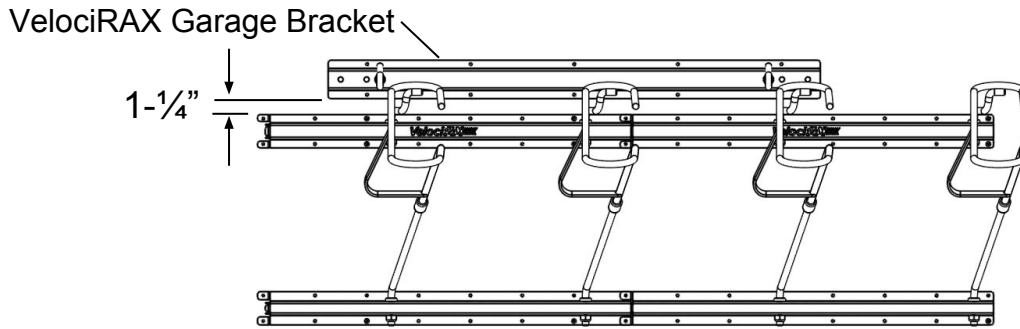


Align tire basket to the right of the VelociRAX hooks as shown

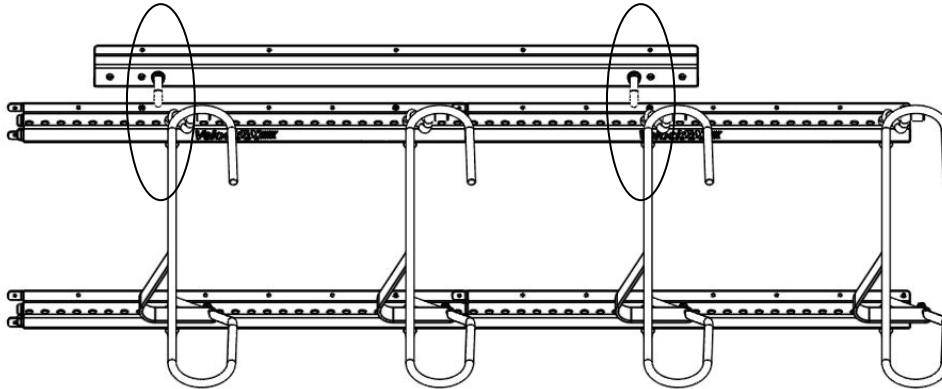

Tilt & Pivot tire basket spacing should match the VelociRAX Bike Rack tire spacing so that it is fully functional when the Tilt & Pivot racks are folded to the wall.

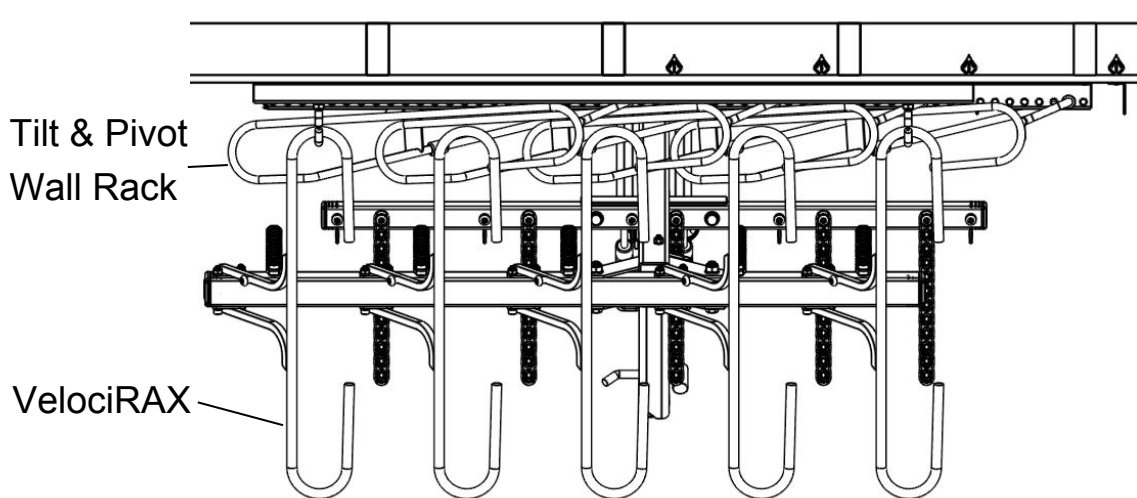

Top View with VelociRAX 5 showing Tilt & Pivot Rack stored

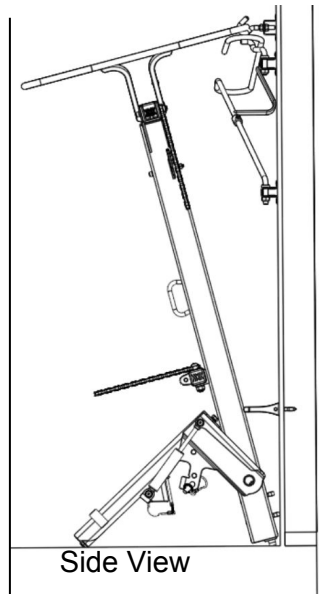



Congratulations on your VelociRAX purchase!

For support contact us at: Support@velocirax.com

For the latest version of these instructions, along with helpful instructional videos, please go to:

www.velocirax.com/pages/assembly

WARRANTY INFORMATION

2 Year Limited Warranty for defects in materials and/or workmanship for the original retail purchaser. This warranty does not cover normal wear and tear, scratches, accidents, misuse, or overloading.

CONTACT INFORMATION

VELOCIRAX

Email: support@velocirax.com

Web address: www.VelociRAX.com

Phone: 435.344.4446