



Three Times Around

Finished quilt size 53 1/2" x 66 1/2" From Ashton Road fabrics, designed by Valori Wells for Robert Kaufman

Before cutting and sewing, please read all instructions to familiarize yourself with them. A 1/4" seam allowance is used throughout.

Materials Needed and Cutting Instructions

(all measurements based on accurate cutting, 1/4" seam allowance, and 42" wide strips)

2 - Ashton Road "Ten Squares" Packets TEN-197-421/3 yard Ashton Road Treehouses AVW-14839-193 Summer

To complete the quilt:

1/2 yard Kona K001-490 Honeysuckle for binding

3 1/2 yards backing if running widthwise, or 4 yards if running lengthwise

60" x 74" quilt batting

Cutting Instructions:

1. Choose 7 of the fabric squares and cut two half triangles out of each as shown. **Figure 1.**

Cut 1 whole triangle out of all but 4 of the remaining squares. Figure 2. (You will have 4 squares left over--you can use them to cut additional half triangles is you want more variety.)

2. Cut 4 whole triangles from the Treehouse fabric as shown in **Figure 3**.




Figure 1




Figure 2



Figure 3

Note: All sides of the triangles are not equal. When sewing, be sure to keep the cut-off tips of the whole triangles alternating at the top or the bottom of the rows, as shown. **Figure 4.**





Figure 4

Sewing Instructions:

1. Referring to the illustration, lay out your triangles, with 11 whole triangles in each row, and a half triangle on each end. Note: The half triangles at the ends of the rows point in alternate directions with each row. You will need a total of 7 rows.




2. Referring to the illustration, start with Row 1.

Sew a half triangle to a whole triangle.

Place the two triangles right sides together, with the whole triangle on top.

Offset the top triangle 1/4" and sew. Figure 5.


Press toward the one you just sewed on.



Layer another whole triangle on top of the one you just sewed. Offset it 1/4" and sew. **Figure 6.** Press toward the left.

Continue working across the row in this manner, sewing and pressing as you go, and adding a half triangle at the end.
This will help keep your row straight.

Press all seam allowances in this row to the left. **Figure 7.**



cut-off tip-

Figure 7

cut-off tip

offset 1/4"


Figure 8

cut-off tip

offset 1/4"

Figure 9

Note: You will be alternating which direction you press each row--odd rows to the left and even rows to the right. By doing this, your seams will "nest" when you sew the rows together



3. Referring to the illustration, sew Row 2, again beginning with a half triangle, but with the point at the top, and sew a whole triangle to it.

Figures 8 & 9.

For this row, press your seam allowances toward the right each time. **Figure 10.**

4. Sew the rows together: Sew Row 1 to Row 2, then add Row 3, etc. Press.

Continue sewing the quilt top together, until all 7 rows have been sewn and pressed.

5. Layer, quilt, and finish the quilt.





Figure 10



Quilt Assembly Diagram

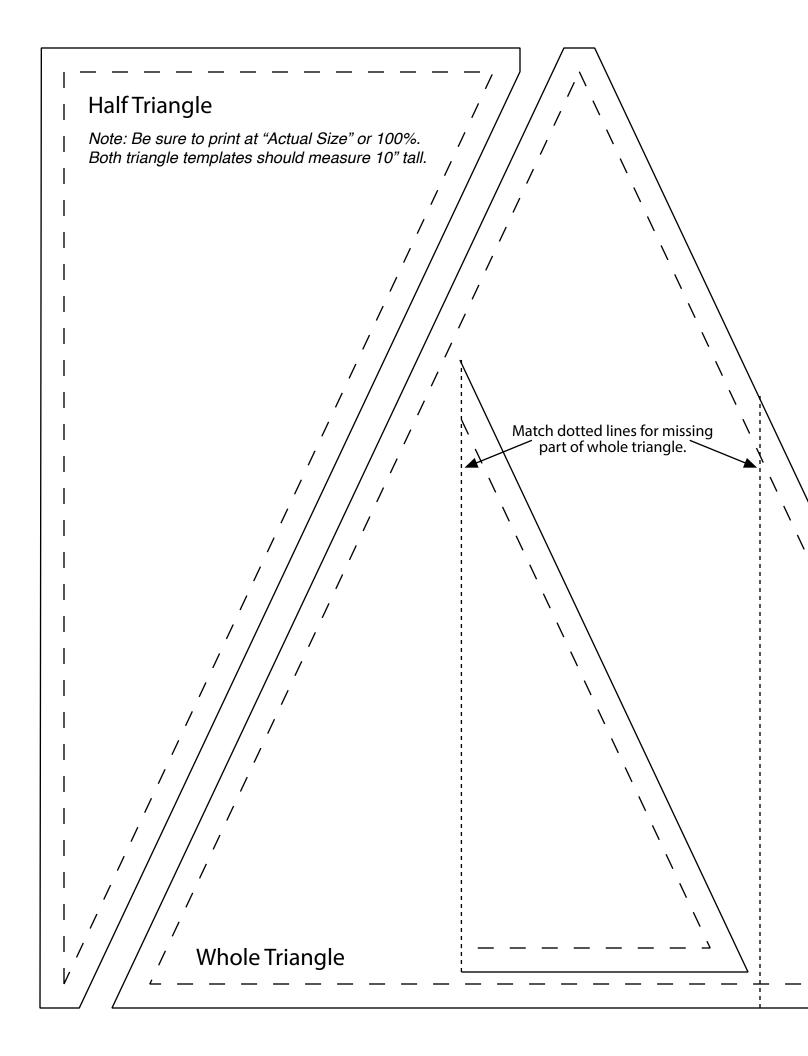