


Ultracut FBS II Concrete Screw R Countersunk & HEX Head


The high-performance concrete screw for easy installation.



■ **MADE**
■ **IN**
■ **GERMANY**



LEARN MORE

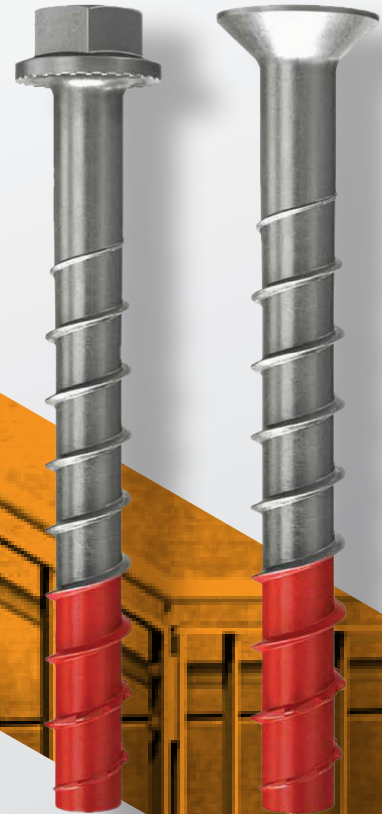

MADE
IN
GERMANY


Ultracut FBS II Concrete Screw R



ULTRACUT FBS II 8 - 12 A4 - US - hexagonal screw



ULTRACUT FBS II 8 - 12 A4 - SK - countersunk head

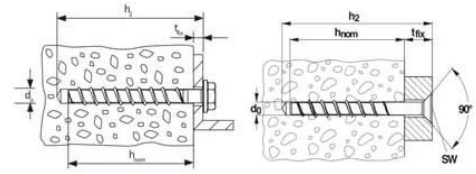

Concrete Screws ULTRACUT FBS II R

Item	Art.-No.	Approval	Nominal drill-Ø	Minimum drill depth at push-through mode	Anchor length	Screwing depth						Width across flat / internal torx drive	Sales unit		
						stainless steel		stainless steel		stainless steel				stainless steel	
						R	ETA	d ₀ [mm]	h ₂ [mm]	l [mm]	h _{nom, 1} [mm]			t _{fix 1} [mm]	h _{nom, 2} [mm]
FBS II 8x60 10/- US R	543565	■	8	70	60	50	10	-	-	-	-	13	50		
FBS II 8x70 20/5 US R	543566	■	8	80	70	50	20	-	-	65	5	13	50		
FBS II 8x80 30/15 US R	543567	■	8	90	80	50	30	-	-	65	15	13	50		
FBS II 8x90 40/25 US R	543568	■	8	100	90	50	40	-	-	65	25	13	50		
FBS II 10x60 5/- US R	543569	■	10	70	60	55	5	-	-	-	-	15	50		
FBS II 10x70 15/5/- US R	543570	■	10	80	70	55	15	65	5	-	-	15	50		
FBS II 10x80 25/15/- US R	543571	■	10	90	80	55	25	65	15	-	-	15	50		
FBS II 10x90 35/25/5 US R	543572	■	10	100	90	55	35	65	25	85	5	15	50		
FBS II 10x100 45/35/15 US R	543573	■	10	110	100	55	45	65	35	85	15	15	50		
FBS II 10x120 65/55/35 US R	543574	■	10	130	120	55	65	65	55	85	35	15	50		
FBS II 12x70 10/- US R	543575	■	12	80	70	60	10	-	-	-	-	17	20		
FBS II 12x85 25/10/- US R	543576	■	12	95	85	60	25	75	10	-	-	17	20		
FBS II 12x110 50/35/10 US R	543577	■	12	120	110	60	50	75	35	100	10	17	20		
FBS II 12x130 70/55/30 US R	543578	■	12	140	130	60	70	75	55	100	30	17	20		
FBS II 8x60 10/- SK R	543579	■	8	70	60	50	10	-	-	-	-	T40	50		
FBS II 8x80 30/15 SK R	543580	■	8	90	80	50	30	-	-	65	15	T40	50		
FBS II 8x90 40/25 SK R	543581	■	8	100	90	50	40	-	-	65	25	T40	50		
FBS II 10x65 10/- SK R	543582	■	10	75	65	55	10	-	-	-	-	T50	50		
FBS II 10x80 25/15/- SK R	543583	■	10	90	80	55	25	65	15	-	-	T50	50		
FBS II 10x95 40/30/10 SK R	543584	■	10	105	95	55	40	65	30	85	10	T50	50		
FBS II 10x100 45/35/15 SK R	543585	■	10	110	100	55	45	65	35	85	15	T50	50		
FBS II 10x120 65/55/35 SK R	543586	■	10	130	120	55	65	65	55	85	35	T50	50		



FUNCTIONING

- The ULTRACUT FBS II R is designed for push-through installation.
- It is recommended to use an impact wrench with a suitable impact socket or torx bit.
- Drill holes do not need to be cleaned during vertical installation (ceiling and floor) or when using a hollow drill. For floor fixing the hole must be drilled 3x dØ deeper.
- The screw is installed correctly when the screw head sits flush and no manual rotation of the screw is possible (hand and visual check).

ADVANTAGES

- The specially hardened red tip provides a faster and more secure installation.
- The stainless steel concrete screw guarantees a high level of corrosion resistance especially for wet rooms and external applications.
- The ETA approval covers applications in cracked concrete, as well as seismic performance categories C1 and C2.
- The concrete screw ULTRACUT FBS II R offers the possibility for usage in masonry (solid building material).