



**WaterMark**  
AS/NZS 3497  
Licence No. WM 74617  
Australian Certification Services



**GENERAL INFO**

**TASTE, ODOUR AND CHLORINE REDUCTION**

**Carbon Block Cartridges**

The Puretec CB Series cartridges are highly effective in reducing, taste, odour, chlorine, and sediment. Cyst, lead, heavy metal, high turbidity and sulphur removal models are also available. The ultimate for beautiful drinking water.

The Puretec CB cartridges are constructed from bonded activated carbon, offering superior treatment of water with no release of carbon fines.

**MATERIALS OF CONSTRUCTION**

- Filter Media                      Bonded PAC
- End Caps                         Polypropylene
- Outer Wrap                      Polyolefin
- Netting                          Polyethylene
- Gaskets                         Buna-N
- Temperature Rating         4.4°C to 82°C

**FEATURES & BENEFITS**

- Designed for mains water supplies.
- Features SilverPlus AntiBacterial Technology.
- Ultimate in carbon cartridges.
- No carbon fines and superior contaminant capacity.
- Flow rates up to 60 litres/minute.
- Temperature rating up to 82°C.
- High dirt holding tolerance maximizes utilization of the carbon-block.
- Enhanced dirt holding capacity for extended cartridge life.
- Reduces chlorine, bad taste and odour.



For more information contact your local stockist or visit us at [puretecgroupp.com](http://puretecgroupp.com)  
Australia **1300 140 140** | New Zealand **0800 130 140**

## CARTRIDGE SPECIFICATIONS

	Model	Dimensions	Description	Micron Rating (Nominal)	Flow (Lpm)	Chlorine Capacity <sup>~</sup>
5"	<b>CB955</b>	standard 2.5" x 5"	cyst reduction*	0.5	8	30,283 L
	<b>CB951</b>	standard 2.5" x 10"	cyst reduction*	0.5	15	75,708 L
	<b>CB951-H</b>	standard 2.5" x 10"	cyst, heavy metal removal	0.5	15	75,708 L
10"	<b>CB011</b>	standard 2.5" x 10"		1	15	75,708 L
	<b>CB051</b>	standard 2.5" x 10"		5	16	64,352 L
	<b>CB101</b>	standard 2.5" x 10"		10	18	56,781 L
	<b>CB952</b>	standard 2.5" x 20"	cyst reduction*	0.5	28	170,343 L
20"	<b>CB052</b>	standard 2.5" x 20"		5	30	140,060 L
	<b>CB102</b>	standard 2.5" x 20"		10	32	132,489 L
	<b>CB95MP1</b>	MaxiPlus™ 4.5" x 10"	cyst reduction*	0.5	20	264,978 L
10"	<b>CB05MP1</b>	MaxiPlus™ 4.5" x 10"		5	24	227,124 L
	<b>CB10MP1</b>	MaxiPlus™ 4.5" x 10"		10	30	196,841 L
	<b>CB95MP2</b>	MaxiPlus™ 4.5" x 20"	cyst reduction*	0.5	40	567,811 L
20"	<b>CB05MP2</b>	MaxiPlus™ 4.5" x 20"		5	48	454,249 L
	<b>CB10MP2</b>	MaxiPlus™ 4.5" x 20"		10	60	378,541 L

\*99.9% reduction of Cryptosporidium and Giardia cysts. ~Capacity is dependent on incoming water quality and flow. Puretec recommends that cartridges should be replaced every 6 - 12 months, when the filter has reached its capacity or when taste or odour returns, whichever occurs first.

CARTRIDGE PERFORMANCE DATA

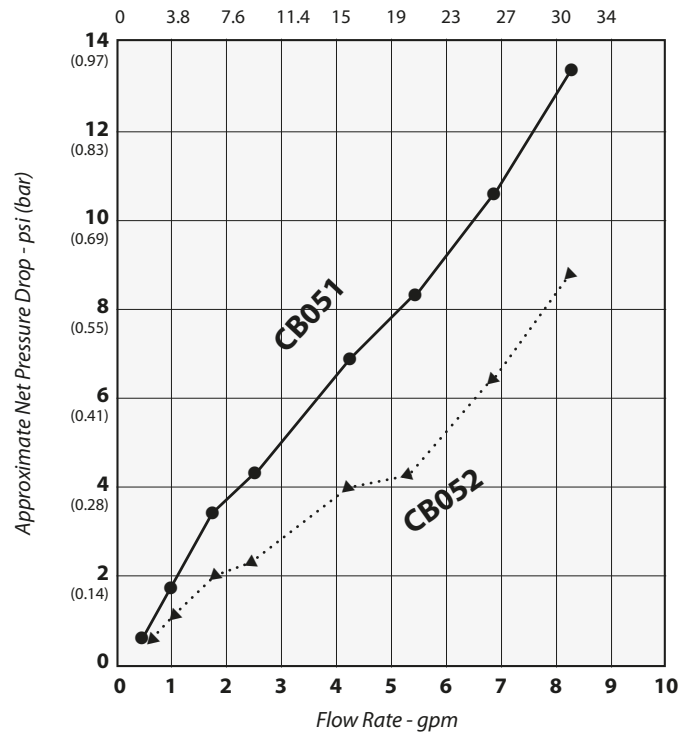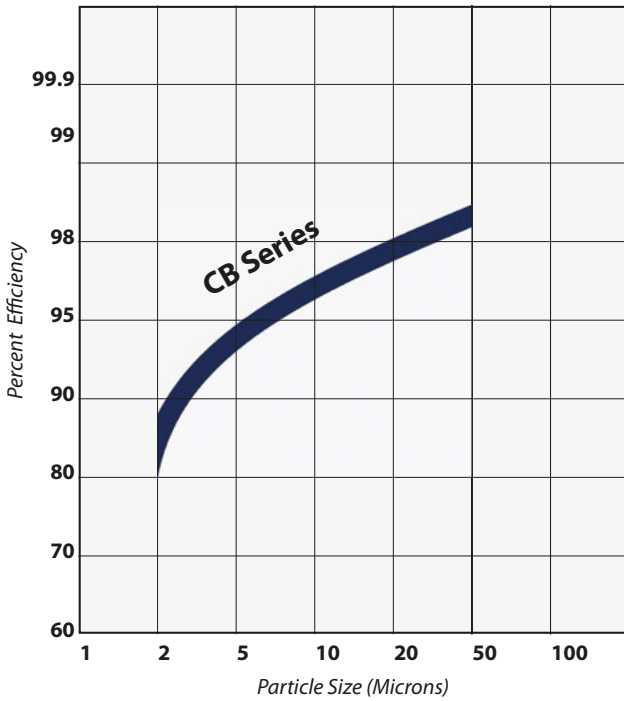

**WaterMark**  
AS/NZS 3497  
Licence No. WM 74617  
Australian Certification Services

**Note:**

1. No claims can be made based on the specifications and images in this document. The design, technology, colours, features and prices are subject to change.
2. This document and all its contents are copyright protected. All rights are reserved, particularly alteration, translation and reproduction using electronic systems.

Our Water Filtration Specialists can provide you with advice to suit your needs.

For more information contact your local stockist or visit us at [puretecgroupp.com](http://puretecgroupp.com)  
Australia **1300 140 140** | New Zealand **0800 130 140**