

TEMPUS® AG CT

1-6 Stations Controller

The module can control from 1 to 6 DC latching hydraulic valves. It can read one rain or flow meter sensor input.

The module communicates with Gateway (4G or Wi-Fi) receiving the irrigation programming and transmitting data detected by the sensor.


The module allows direct connection from smartphone / tablet via Bluetooth®.

SPECIFICATION AND FEATURES

- LoRa™ radio connection
- 1,2,4 or 6 stations
- LoRa™ range up to 800 m
- Independent programming by station
- Watering schedule: daily, odd/even days, day interval, cyclic
- 4 irrigation windows per station
- Bluetooth® Smart 4.0 Low Energy
- Automatic and manual start from smartphone/ tablet/pc
- Permanent memory
- Rain or flow meter sensor input
- Rain delay function from 1 to 15 days or permanent
- Remote management via MyToroTempus App and MyToroTempusag.com Web Platform
- IP68 waterproof
- Power Supply 9V DC battery
- 9V Latching solenoid compatible
- Maximum wiring distance from CT module to solenoids: 30 m
- Operating Temperature: -20°C / 60°C

Codification


Code	Description
TEMPUS-AG-CT-1-A	Tempus® AG CT - DC Controller 1 Station
TEMPUS-AG-CT-2-A	Tempus® AG CT - DC Controller 2 Stations
TEMPUS-AG-CT-4-A	Tempus® AG CT - DC Controller 4 Stations
TEMPUS-AG-CT-6-A	Tempus® AG CT - DC Controller 6 Stations

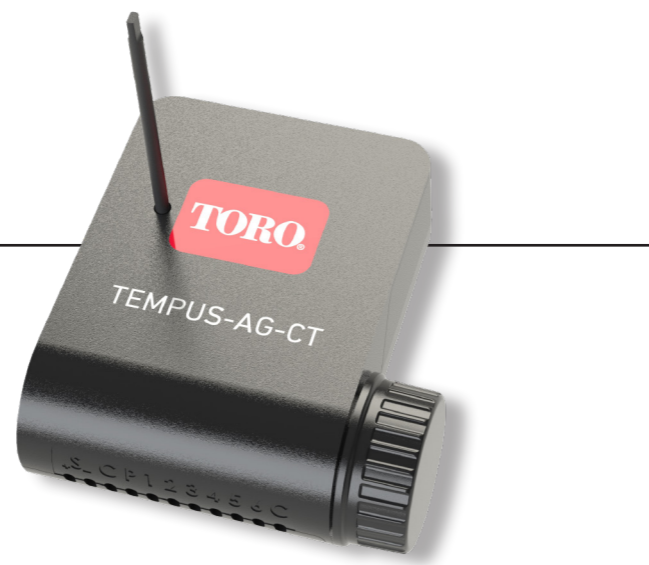



LoRa™ controlled, IP68 battery operated controller to manage from 1 to 6 hydraulic valves. It can read one rain or flow meter sensor input.

**MODULES ARE BATTERY POWERED
NO NEED FOR WIRING**

Discover MyToroTempus App to monitor and control your TEMPUS® AG SYSTEM




Free download at App Store or Google Play


Clear station labelling to make the installation process easy and intuitive



Bracket for installation on top of a solenoid included

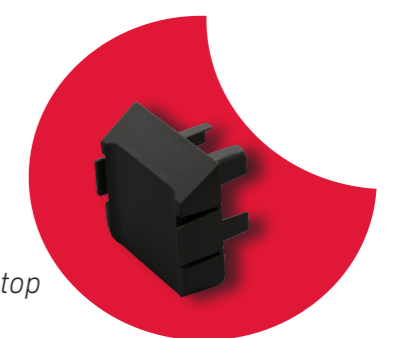

Waterproof wire connectors included



Battery not included

TEMPUS AG | MODULES



For more information visit thelandscapestore.com.au | (02) 9161 3939 |

