

TEMPUS® AG PR

Pressure Sensor Module

The module detects the pressure of your irrigation system.

Thanks to the pre-wired pressure sensor, Tempus® Ag PR allows you to check the operating status of your system, to prevent malfunctions and to warn you if pre-set thresholds are exceeded.


The module communicates with the Gateway (4G or Wi-Fi), forwarding the detected data and also allows direct connection from smartphone/tablet via Bluetooth®.

SPECIFICATIONS AND FEATURES

- LoRa™ radio connection
- 1 input for pressure sensor
- LoRa™ range up to 800m
- Pressure sensor included and pre-wired
- 0-5V analogue input
- Pressure measurement 0-1600 kPa
- Bluetooth® Smart 4.0 Low Energy
- Warning feature when thresholds exceeded
- Waterproof connector (MetriPack-150)
- Sensor thread: 1/4" BSP
- Remote management via MyToroTempus App and MyToroTempus.com Web platform
- IP68 waterproof
- Powered by 9V DC battery
- Operating temperature: -20° C/60° C

Coding


Code	Description
TEMPUS-AG-PR-A	Tempus® Ag PR - Pressure Sensor Module

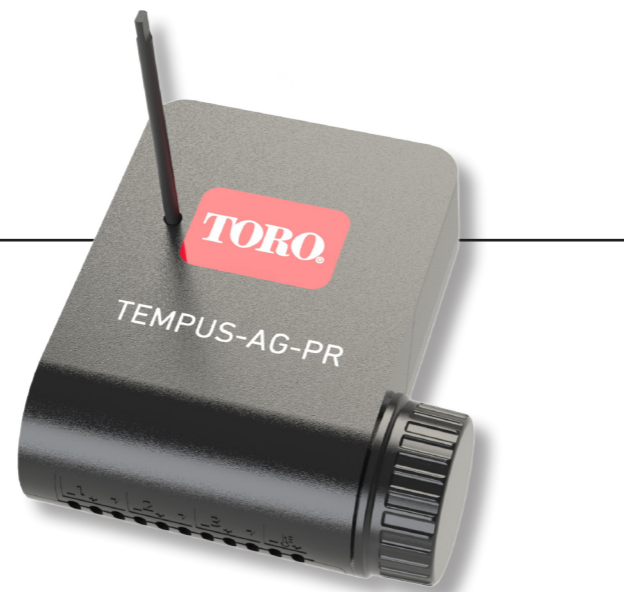



LoRa™ controlled, IP68, battery-powered pressure sensor module.

**NO WIRING.
THE MODULE IS
BATTERY-POWERED**

Discover MyToroTempus App to monitor and control TEMPUS® AG SYSTEM



Free download on App Store or Google Play


The pressure sensor is connected to the module directly at the factory

The sensor can be disconnected thanks to its waterproof Metripack-150 connector



Bracket for installation included



Metripack-150 waterproof connector included



For more information visit thelandscapestore.com.au | (02) 9161 3939 |



Battery not included