

**PLAN ON MODULAR ROOFLIGHT**  
1no REQUIRED AS SHOWN

BLACK PAINTED BORDER TO FACE #2 OF DOUBLE GLAZED UNIT (OPTIONAL)


CONTINUOUS SILICONE SEAL TO FULL PERIMETER, COMPLETE WITH BACKING RODS

BLACK DOUBLE SIDED STRUCTURAL GLAZING TAPE (FOR 6.4mm THICK GLASS TA061A 15x3mm TAPE) 'T' SECTION REF. 018


BTA055D 15 x 15 EPDM SEMI CLOSED CELL TAPE SUPPLIED LOOSE, APPLIED TO TOP OF UPSTAND PRIOR TO FITTING 'T' FRAME

CLIP IN PROFILE AFTER FIXING PROFILE REF.019

<b>FLAT GLASS ROOFLIGHT</b> (SET WITHIN POLYESTER POWDER COATED ALUMINIUM TEE)	
Quantity of Rooflight(s)	1no
Roof Opening - Length (mm)	Dim A
Overall Upstand - Length (mm)	Dim B
Roof Opening - Width (mm)	Dim C
Overall Upstand - Width (mm)	Dim D

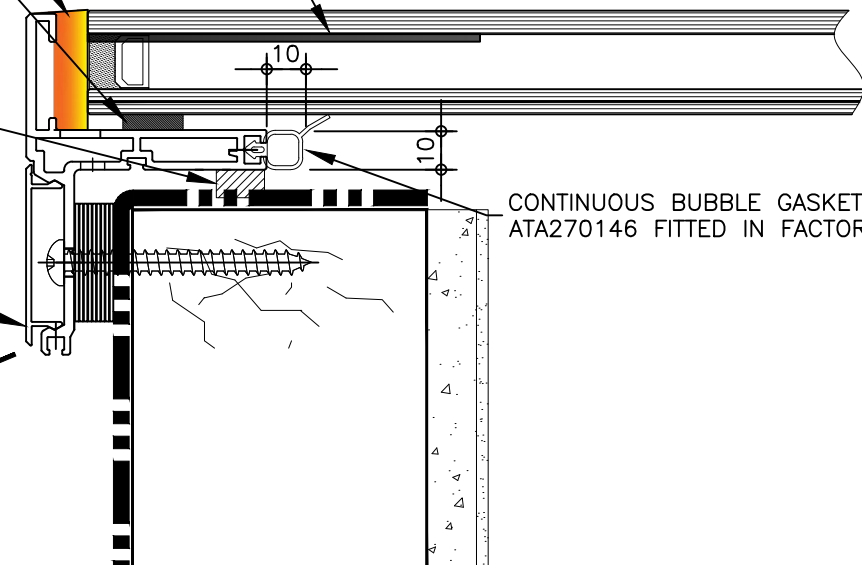


CONTINUOUS BUBBLE GASKET ATA270146 FITTED IN FACTORY

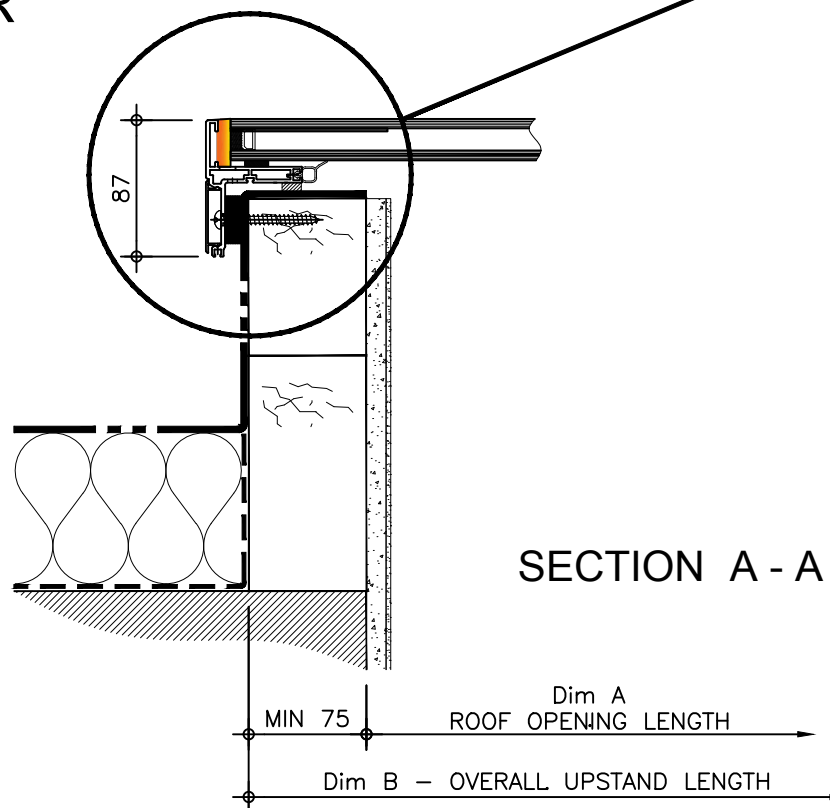

**SECTION A - A**

ROOF FINISHES DRESSED UP EXTERNAL FACE OF BUILDERS UPSTAND BY ROOFING CONTRACTOR PRIOR TO INSTALLATION OF ROOFLIGHT

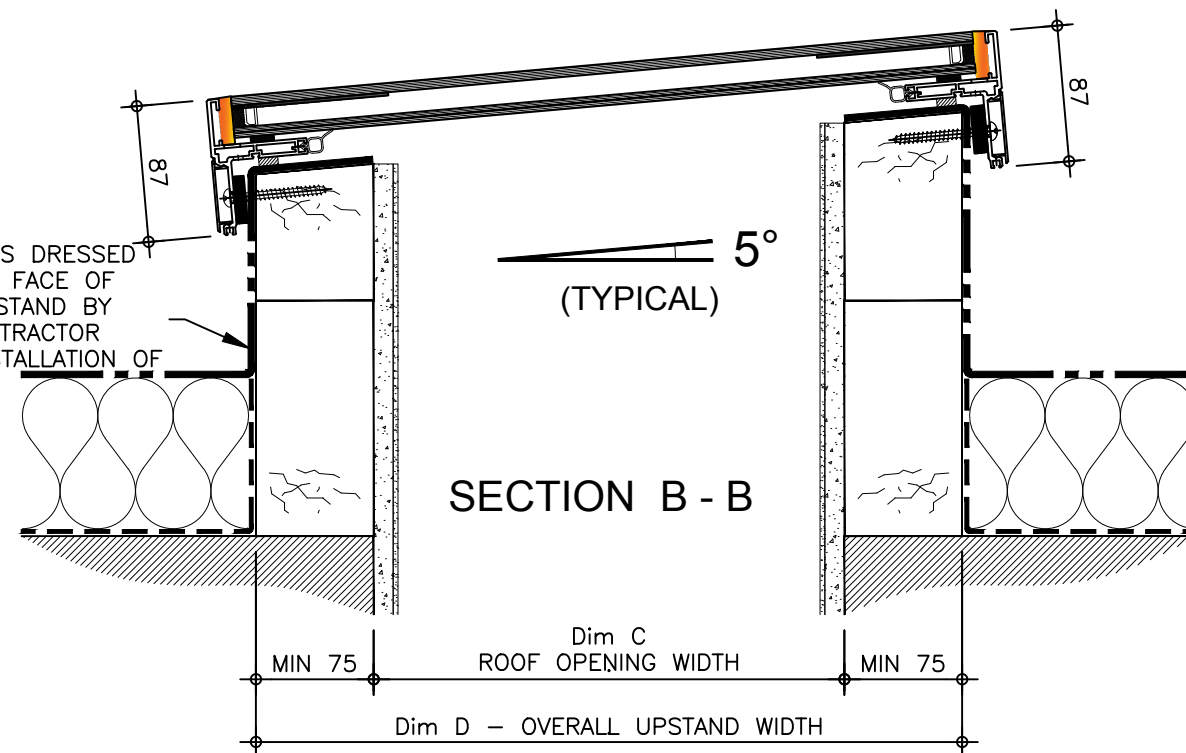

**SECTION B - B**

5°  
(TYPICAL)

**Paint Specification:**

Polyester Powder coated to:

Colour: To be confirmed

RAL: To be confirmed

**Typical Glazing Specification:**

Outer - 6mm thick clear toughened low 'E' glass

Core - 14mm thick air filled cavity

Inner - 6.4mm thick clear laminated glass

REV:	DATE:	DESCRIPTION:	DRN BY	DESCRIPTION:
0	10.10.19	First issue of drawing	IMW	Unventilated single-pane flat glass rooflight (FLAT GLASS), fixed to builders upstand on a flat roof.
DRAWN BY:		CREATION DATE:	CHECKED BY:	SCALE(S)
IMW		10.10.19	--	1:5, 1:2 @ A3
REVISION:		0		
<b>Coxdome</b> Unit 1, Prothero Industrial Estate, Bilport Lane, Wednesbury, West Midlands, WS10 0NT Tel: 0121 530 4230 Web: www.coxdome.co.uk				DRG No. <b>CD-IGLF-SS-02</b>

