


## TECHNICAL DATA SHEET

### PRODUCT DETAILS

|  |                   |
|--|-------------------|
| Product Code                             | AR8422            |
| Product Range                            | Ashton & Rose     |
| Construction                             | Engineered        |
| Specie                                   | Oak               |
| Pattern                                  | 1-Strip           |
| Process                                  | Brushed           |
| Finish                                   | UV Matt Lacquered |
| Profile                                  | 5Gc               |
| Edge Profile                             | 4-Sided Bevelled  |
| Top Layer                                | 2.5mm (3/32in)    |
| Backing                                  | Pine Plywood      |
| Grade                                    | Various           |
| Width                                    | 130mm (5 1/8in)   |
| Length                                   | 1092mm (42 5/6in) |
| Thickness                                | 14mm (5/8in)      |
| Origin                                   | Europe            |
| Responsible Certification                | FSC 70%           |
| Janka Hardness Rating                    | 1360 lbf (6000N)  |
| Formaldehyde Emission                    | E1                |
| Pentachlorophenol Emission               | < 5ppm            |
| Thermal Conductivity                     | 0.13 W /mK        |
| European Reaction to Fire Classification | Dfl-s1            |

### ASHTON & ROSE

### AR8422 KELLET

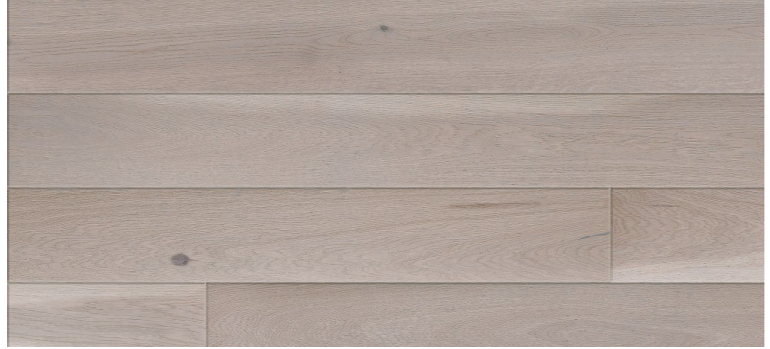

### INSTALLATION METHODS

|                            |   |
|----------------------------|---|
| Fully Bonded               | Yes   |
| Nailed                     | No  |
| Floated on Underlay        | Yes (Recommended)   |
| Over Under-floor Heating   | Yes* (To be installed over wet or dry underfloor heating systems) |
| Number of Boards in a Pack | 7 pcs. x 1092mm OR<br>6 pcs. x 1092mm + 1 pcs. x 1064mm           |

### INSTALLATION AND WARRANTY

All Hardwood Floor Store floors must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Hardwood Floor Store's warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standard worldwide.

© This technical data sheet was written by HFSCO Limited, Carnforth Business Park, Oakwood Way, Carnforth Lancashire LA5 9FD. At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. The photographs used in this sheet are intended only as illustrations. No rights can be derived from them.

#### HFSCO Limited

Unit 11,  
Carnforth Business Park,  
Oakwood Way,  
Carnforth,  
Lancashire,  
LA5 9FD