

AR8500F

Herringbone | 130 x 725 x 14mm


PRODUCT DETAILS

Construction	Engineered
Specie	Oak
Pattern	Herringbone
Finish	UV Matt Lacquer
Profile	Click fall down
Header joint	Optilock system
Edge Profile	4-Sided-Bevelled
Origin	Europe
Hardness Rating	3.77 kg/mm ²
Brushing	Yes
Staining	Yes
Wood features	Moderate quantity

INSTALLATION METHODS

Fully bonded	Yes
Nailed	No
Floated on underlay	Yes (Recommended)
Over under-floor heating	Yes*
Number of Boards in a Pack	7 pcs. (0.65m ²)

*To be installed over wet or dry underfloor heating systems.

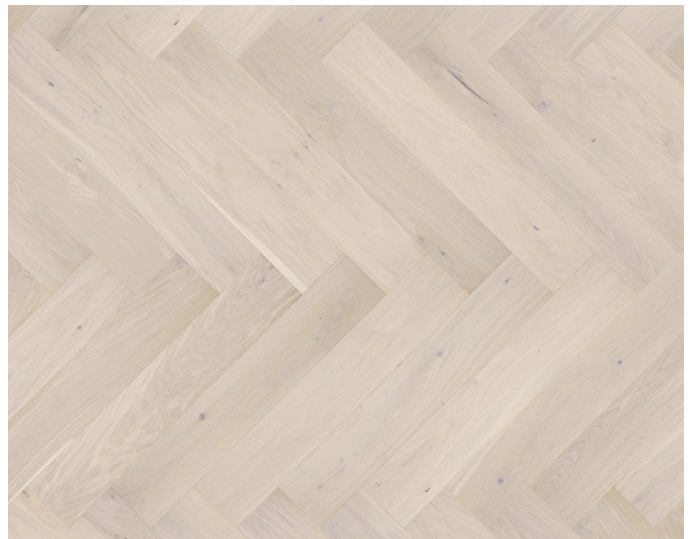

INSTALLATION AND WARRANTY

All Hardwood Floor Store floors must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Hardwood Floor Store's warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standard worldwide.

© This technical data sheet was written by HFSCO Limited, Carnforth Business Park, Oakwood Way, Carnforth Lancashire LA5 9FD. At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. The photographs used in this sheet are intended only as illustrations. No rights can be derived from them.

TDS/HFS. Part of the Hawwoods International Group.

hardwoodfloorstore.co.uk

info@hardwoodfloorstore.co.uk

+44(0)1524 481 171

