

HARDWOOD FLOOR STORE

TECHNICAL DATA SHEET


PRODUCT INFORMATION

High density polyethylene underlay for heavy loaded, residentially and commercially used floors, suitable for floor heating.

- Closed cells HDPE foam used for installation of laminated and engineered floating floors.
- Suitable for floor heating - exceeds thermal conductivity recommended by EPLF.
- For high demands on pressure stability under heavy loaded floors.
- Very high material density.
- 100 % recyclable, CFC and HCFC free.
- Ecologically friendly.

ASPECT UNDERLAY | 2MM 15M2

HF001

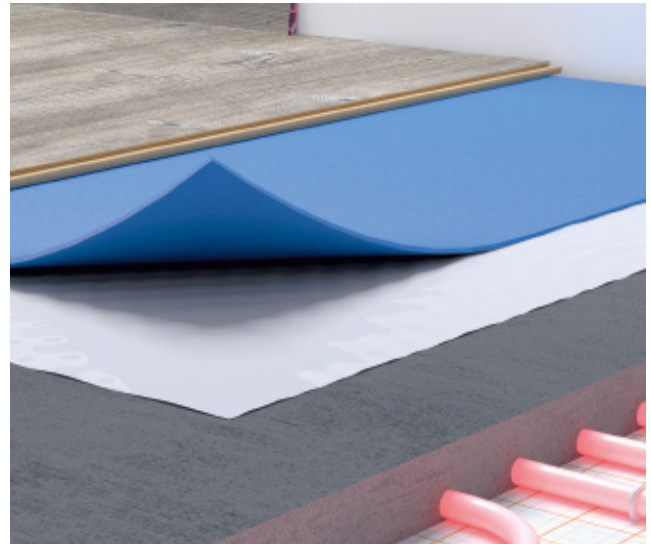

TECHNICAL DETAILS

Thickness	2mm	EN823
Length	15,000mm	EN822
Width	1000mm	EN822
Area Weight	0,20kg/m ²	EN ISO 23997:2012
Density	100kg/m ²	EN ISO 23996:2012
Reflected Walking Sound	12%	IHD-W431
Impact Sound Reduction	19dB	EN ISO10140, ISO717-2
Temporary Loads Resistance	60kPa	EN 826:2013+A: FU1:2019
Static Loads (Furniture) Resistance	>25kPa	EN1606
Dynamic Loads (Walking) Resistance	<100,000 cycles	EN13793
Local Unevenness Compensation	1,4mm	EN-ISO868
Thermal Insulation	0,036m ² K/W	EN12667:2002 at 24 C
Protection Against Moisture	>75m	EN12086
Protection Against Falling Objects	1,150mm	EN13329, EN438
Reaction To Fire	Efl	EN ISO11925-2, PN-EN13501-1

INSTALLATION & WARRANTY

All Hardwood Floor Store floors must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Hardwood Floor Store's warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standard worldwide.

© This technical data sheet was written by Hardwood Floor Store, Carnforth Business Park, Oakwood Way, Carnforth, Lancashire, LA5 9FD. At the time of writing and publication of this folder, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.