

HARDWOOD FLOOR STORE

TECHNICAL DATA SHEET


PRODUCT INFORMATION

Low density polyethylene underlay with integrated, metallised vapor barrier and overlap for fast assembly and good local unevenness compensation capability.

- Closed cells LDPE foam used for installation of laminated and engineered floating floors.
- Integrated vapor barrier with overlap for fast installation.
- Compensates local unevennesses up to 1,55mm.
- Can be laid easily and quickly, since it is always flat and has a slippery surface.
- 100 % recyclable, CFC and HCFC free.
- Ecologically friendly.

VITAL UNDERLAY | 2MM 15M2

HF005

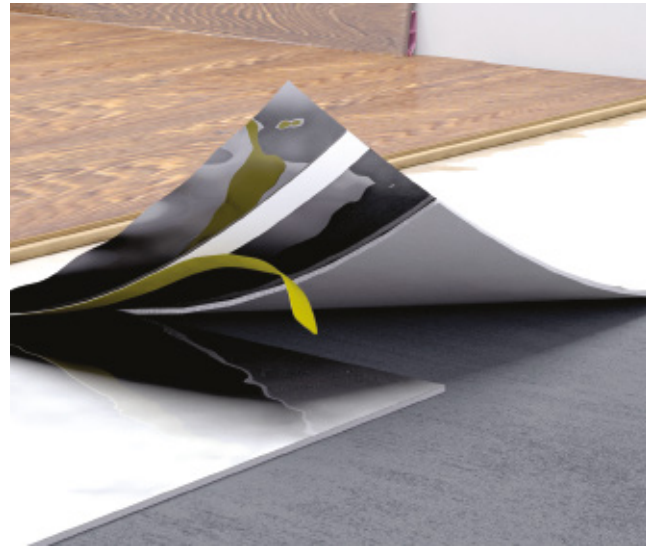

TECHNICAL DETAILS

Thickness	2mm	EN823
Length	15,000mm	EN822
Width	1000mm	EN822
Area Weight	0,07kg/m ²	EN ISO 23997:2012
Density	18kg/m ²	EN ISO 23996:2012
Reflected Walking Sound	3%	IHD-W431
Impact Sound Reduction	18dB	EN ISO10140, ISO717-2
Temporary Loads Resistance	10kPa	EN 826:2013+A: FU1:2019
Static Loads (Furniture) Resistance	>2kPa	EN1606
Dynamic Loads (Walking) Resistance	<100000 cycles	EN13793
Local Unevenness Compensation	1,55mm	EN-ISO868
Thermal Insulation	0,050m ² K/W	EN12667:2002 at 24 C
Protection Against Moisture	>75m	EN12086
Protection Against Falling Objects	1,500mm	EN13329, EN438
Reaction To Fire	Efl	EN ISO11925-2, PN-EN13501-1

INSTALLATION & WARRANTY

All Hardwood Floor Store floors must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Hardwood Floor Store's warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standard worldwide.

© This technical data sheet was written by Hardwood Floor Store, Carnforth Business Park, Oakwood Way, Carnforth, Lancashire, LA5 9FD. At the time of writing and publication of this folder, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.