
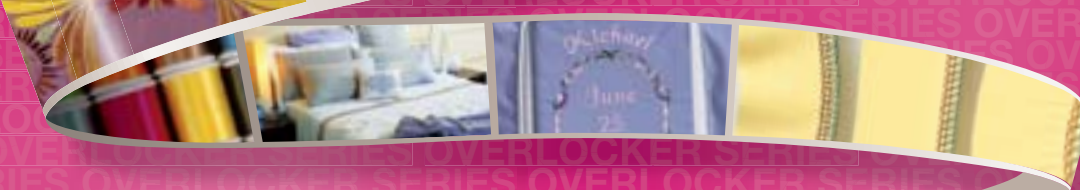


JANOME

OVERLOCKER SERIES

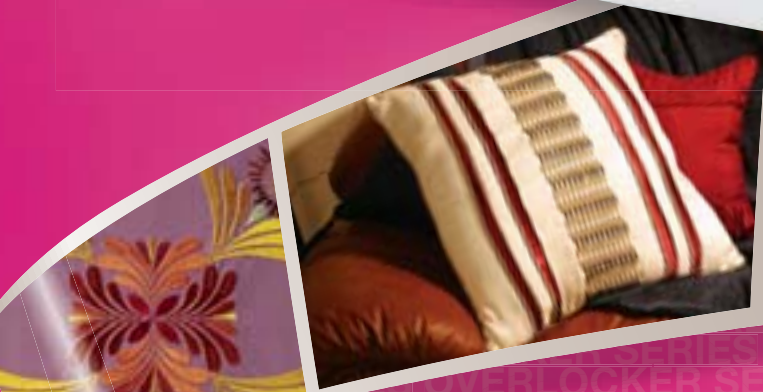

ML744D

ML744D Features

Easy upper knife retraction lever	Differential feed ratio 0.5-2.2
Lay-in tension dial	Seam type: 2, 3 and 4 thread overlock
Free arm & flat bed convertible	Colour coded thread guides
Easy rolled hem changeover	Lower looper easy threading mechanisms
Cutting width 3.1mm - 7.3mm	Optional attachments
Lint catcher and accessory box	Dust cover
Maximum speed 1300 S.P.M	

2 Thread Overlocking

For rolled hem stitch with thick thread, flat lock stitch, and when overlocking stretch or lightweight fabrics.



Free Arm & Flat Bed Convertible


Free arm & flat bed type of convertible overlock machine.



Range of Differential Feed Ratio

Stretched edges on knit fabrics are prevented by setting the differential feed dial between 1.0 and 2.2.

Puckered edges on fine woven fabrics are prevented by setting the differential feed dial between 0.5 and 1.0.

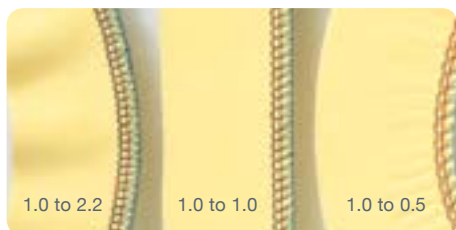

Upper Knife Retraction Lever

Slide the lever to the left to disengage the upper knife action. To engage again, simply slide lever to the right.



Easy Rolled Hem Change-over

No need to change the needle plate for rolled hemming. Just slide the needle plate setting knob to "R" position to convert the plate for rolled hemming.



Differential Feed

The differential feed device is designed to prevent fabrics from puckering or stretching. Both stitch length and differential feed dials can be set at any time, even while sewing.



Lay-in Tension Dial

The concealed threading path assures easy to follow threading and stable sewing results.

JANOME

AUSTRALIA

Janome Australia Pty Ltd.
PO Box 1383, Moorabbin 3189 Victoria
www.janome.com.au

NEW ZEALAND

Janome Sewing Machine Co. (NZ) Ltd.
PO Box 51009, Pakuranga, Auckland 2140
www.janome.co.nz

AVAILABLE FROM YOUR EXPERT JANOME RETAILER



We Support ALL of
Our Machine Sales
with Lessons!