2021/2022



INSTRUCTION MANUAL

Alterseat

ALTERSEAT (M) SDN. BHD. Add: B-1, 20, Jalan Persiaran Jalil 1, Bukit Jalil, 57000 Kuala Lumpur

Tel: Web:

(+60) 16 601 8581 www.alterseat.com

TABLE OF CONTENTS

	1
PARTS OF THE CHAIR	2
ATTACHING THE HEADREST	3
INSERTING THE ACRYLIC TAG	4
CONNECTING THE BACK PIECE	5
CONNECTING THE GAS LIFT	7
CONNECTING THE TOP PIECE WITH LEG	8
ADJUSTING YOUR SEAT	10

INTRODUCTION

Welcome to the Alterseat Team and thank you altering your ergonomic experience with us. This product is manufactured and designed solely by Alterseat (M) Sdn. Bhd.


We specialize in producing and manufacturing **office chairs** for **over 20 years** including other furniture.

Before proceeding into this manual, ensure that after unpacking and before any assembly, all items and parts of installation are clear of any damages. If there are any damages found, immediately contact our **customer service number 03-5033 2690** for assistance.

This product is intended for indoor use. Kindly take time to **read and follow the instructions provided** in the following pages. Install as described and guided in this installation manual. **We accept no liability for damages caused for any improper use.**


From,

Team Alterseat

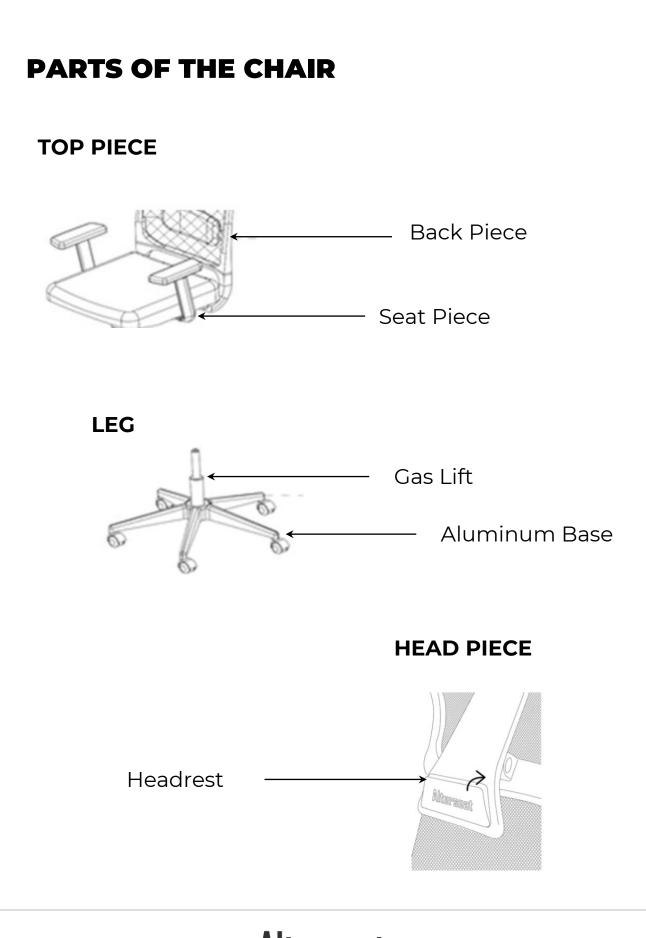

ATTACHING THE HEADREST

HEAD PIECE

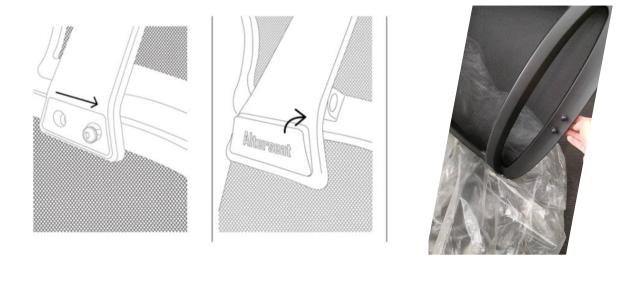

В

INSTRUCTIONS

A. Using the Allen Key provided, remove the 2 screws (loosely attached)

to the headrest area of the top piece.


Α

B. Align the headrest according to the 2 pilot holes and tighten the

screws with the same Allen Key provided.

INSERTING THE ACRYLIC TAG

ACRYLIC TAG

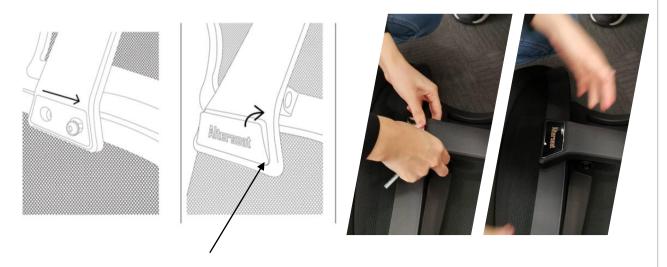

С

Clip from the bottom

INSTRUCTIONS

C. Gently insert the Alterseat Acrylic Tag, starting from the bottom of

the tag. Your will hear a '*Click*' sound when it is tightly locked.

CONNECTING THE BACK PIECE

BACK PIECE W SEAT PIECE



Ε

INSTRUCTIONS


D

- D. At the base of the back piece, *remove all 3 screws* that are loosely attached with the *larger Allen Key* provided.
- E. Align the back piece to the seat piece. Reattach the 3 screws in the

same triangle shape. Tighten with Allen Key provided

CONNECTING THE BACK PIECE

BACK PIECE W SEAT PIECE




F

INSTRUCTIONS

F. If your seat looks like this, *congratulations!* You have successfully connected the back piece and seat piece together. You have now assembled the Top Section of your chair. Keep going!

CONNECTING THE GAS LIFT

GAS LIFT W ALUMINUM BASE

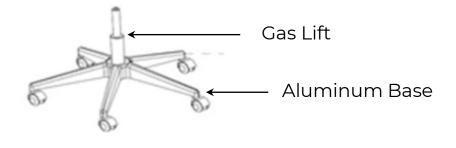



INSTRUCTIONS


G. Insert the wider end of the Gas Lift into the Aluminum Base.

G

Note: No 'click' sound will be heard.

CONNECTING THE TOP PIECE W LEG

TOP PIECE W LEG PART





slanting at an angle *

INSTRUCTIONS

H. Slant the 'Top Piece' on one side. Then insert the 'Leg' from a side

angle to connect both segments together.

CONNECTING THE TOP PIECE W LEG

TOP PIECE W LEG PART



L


INSTRUCTIONS

I. Once both parts are successfully connected, lift your chair in an upwards and straight direction. You are now ready to sit with Alterseat!

Alterseat

ADJUSTING YOUR SEAT


ARMREST

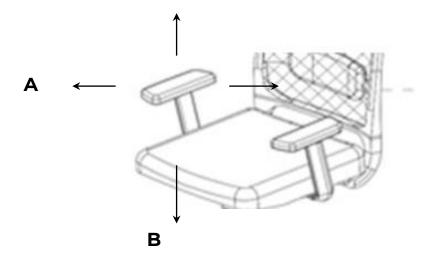

INSTRUCTIONS

- A. Left and Right: Move Handles Side To Side
- B. Up and Down: Press Button Under Armrest

HEADREST






INSTRUCTIONS

- C. Height: Adjust in an upward and downward motion
- D. Angle: Tilt forward or backward

HEIGHT, RECLINE & INCLINE



INSTRUCTIONS

- E. Lever: To go lower, sit while pushing lever down. To go higher, stand while pushing lever down.
- F. Recline & Incline: To recline, pull lever outwards and lean backwards. To lock position in place, push lever inwards. To incline, pull lever outwards, lean backwards and slowly return to original position.

LUMBAR SUPPORT



INSTRUCTIONS

G. Turn knob clockwise for lumbar support to roll downwards. Turn

knob anticlockwise for lumbar support to roll upwards.



THANK YOU