



SYSTEM:2™ MOD MEDIA™

SYSTEM:2™ MOD MEDIA™

FILTERS—PLM SERIES

Greater dirt-loading capacity reduces maintenance

The System:2 Mod Media filter is ideal for small inground and aboveground pools. This filter is a compact adaptation of System 3® filter technology from Sta-Rite, so it handles dirt loads up to 15 times greater than sand filters of equivalent size. The result: You capture more dirt between cleanings and minimize time on maintenance.

- Balanced-flow tank design works in unison with the high-capacity filter module to collect dirt over its entire surface—holds more dirt so you clean less often.
- Less frequent cleaning also increases filter module service life and lowers lifetime costs.
- Rugged composite construction resists corrosion and weathering.
- Compact design fits in tight installations and can be easily shielded from view.



PENTAIR.COM



TRADEGRADE

SYSTEM:2™ MOD MEDIA™

Easy to clean—just spray and go




The Mod Media filter contains a one-piece module that simply drops into an easily accessible tank. When cleaning is necessary, just remove the lid (no tools are necessary) and spray-rinse the module while it is still in place.* It only takes minutes to thoroughly clean the filter and get back into service— fast.



Less maintenance...YES!
The balanced-flow tank design directs water through both sides of the filter module, which increases dirt-loading without clogging. Holding more dirt means a longer time between cleanings.

*Modules used in conjunction with certain pool/spa sanitizers may require soaking in special cleaning solutions

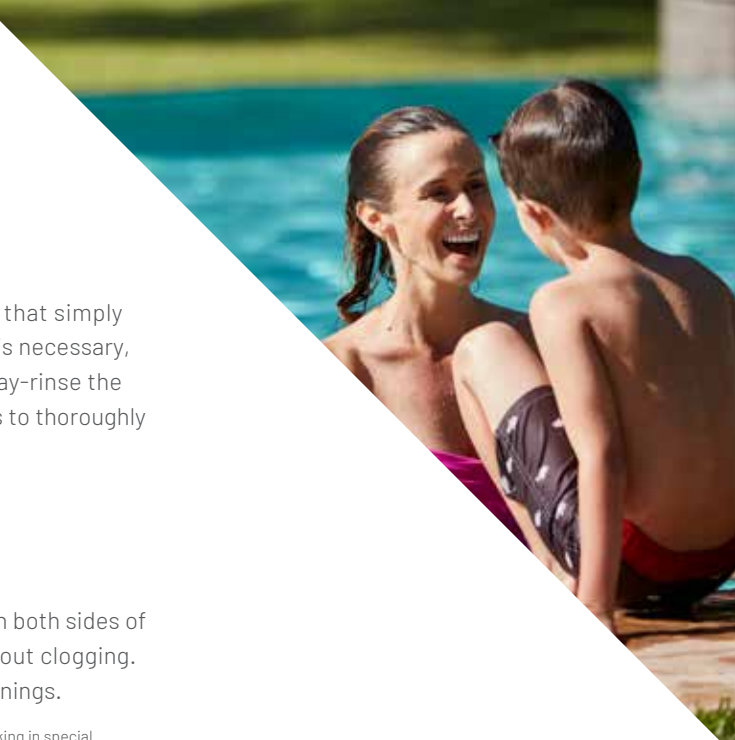

FILTER PERFORMANCE

| Model | For Pools up to 8 Hr. Turnover (Gal.) | Filter Area (Sq. Ft.) | Flow Rate ¹ (GPM) |
|--------|---------------------------------------|-----------------------|------------------------------|
| PLM100 | 48,000 | 100 | 38-100 |
| PLM125 | 60,000 | 125 | 47-125 |
| PLM150 | 72,000 | 150 | 56-150 |
| PLM175 | 72,000 | 175 | 66-150 |
| PLM200 | 72,000 | 200 | 75-150 |
| PLM300 | 72,000 | 300 | 113-150 |

¹Based on NSF-recommended flow rate for commercial at 0.375 GPM per square foot.

Operating Limits —Maximum continual operating pressure is 50 psi. For pool/spa (bather) applications, the maximum operating water temperature within the filter is 104°F (40°C).



Top-mounted pressure gauge and information panels are positioned for easy reading

Split-tank design permits simple, thorough, rinse-in-place cleaning to save time

Posi-Ring closure is easy to secure, lasts for years

Balanced-flow tank hydraulics direct water through each side of the filter module for uniform dirt loading to prevent clogging and maximize filtration effectiveness



The System: 2 Mod Media filter earned the Eco Select® brand distinction as one of the greenest and most efficient choices from Pentair.

TRADEGRADE

The TradeGrade family of products is exclusively made for and sold by the world's most demanding pool professionals.

400 Regency Forest Dr | Cary, NC 27518 | United States | 800.831.7133 | pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2021 Pentair. All rights reserved. Pentair.com

P1-73111/21