


# Specifications



<b>General Description</b>	3-way vented-box/standmount
<b>Enclosure Type</b>	Bass reflex
<b>Transducer Complement</b>	3-way
<b>ABR</b>	
<b>Bass Driver</b>	8"(200mm) black woven Kevlar® cone
<b>Midrange Driver</b>	5"(135mm) black woven Kevlar® cone
<b>Treble Driver</b>	1"(25mm) soft dome
<b>Full-range Driver</b>	
<b>AV Shield</b>	No
<b>Sensitivity (2.0V @ 1m)</b>	90dB
<b>Recommended Amplifier Power</b>	25-200W
<b>Peak Power Handling</b>	
<b>Peak SPL</b>	110dB
<b>Nominal Impedance</b>	6Ω
<b>Minimum Impedance</b>	3.5Ω
<b>Frequency Response (+/-3dB)</b>	40Hz ~ 20kHz
<b>Bass Extension (-6dB)</b>	35Hz
<b>Crossover Frequency</b>	630Hz & 2.4kHz
<b>Cabinet Volume (in litres)</b>	37.6L
<b>Dimensions (mm)</b>	
<b>Height (on plinth)</b>	565mm
<b>Width</b>	300mm
<b>Depth (with terminals)</b>	(330+30)mm
<b>Carton Size</b>	460`430`710mm
<b>Net Weight</b>	18.4kg/pcs
<b>Gross Weight</b>	20.5kg/ctn

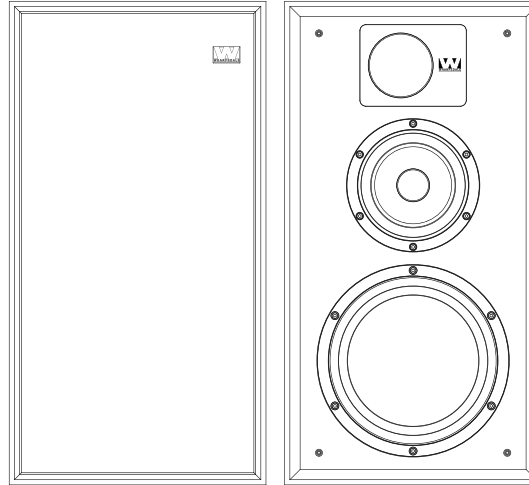