



**BEN
SEN**

Fabrics & Leathers

2024

BENSEN Leathers

Category	Leathers (Stocked in Europe)
A	P 4 House Leather P 5 Prescott P 11 Toscano (Category A, Tokyo only) (Category B, Stax only)
B	P 13 Cashmere P 14 Elmosoft IX P 18 Elmonordic IV P 20 Lord
C	P 22 Acquario P 23 Shearling

BENSEN Fabrics

Category	Fabrics	*NEW
B	P 25 Boira* P 27 Drop* P 29 Emyr GRS* P 31 Lecco P 33 Moulin* P 35 Noah* P 37 Ombra* P 38 Rialto P 40 Sorra* P 42 Teddybea	
C	P 44 Delta* (Indoor/Outdoor) P 46 Donnafugata Soft P 48 Gaja Classic (Gabriel) P 51 Maple (Kvadrat) P 53 Moovie* P 54 Nina* P 56 Nobilis (New Colors) P 58 Quiche MT* P 60 Relax* P 62 Sobral P 63 Tundra 01	
D	P 65 Annik GRS* P 67 Barnum (New Colors) P 70 Credo (Rohi) P 72 Esopo 01 P 74 Europost 2 (Gabriel) P 77 Katmandu P 79 Luna 2 (Gabriel) P 81 Mica (Rohi) P 83 Savanna (Kvadrat) P 85 Sera (Rohi) P 87 Shake (Rohi)	
E	P 91 Dhogar* P 93 Divina 3 (Kvadrat) P 97 Divina MD (Kvadrat) P 99 Divina Melange 3 (Kvadrat) P 102 Everest P 104 Harald 3 (Raf Simons/ Kvadrat) P 106 Vidar 4* (Raf Simons/ Kvadrat)	
F	P 110 Comfort+ (Gabriel) P 115 Ecriture (Sahco) P 118 Moss (Sahco) P 121 Safire (Sahco) P 123 Zero* (Sahco) +5% P 125 Nabis* (Sahco) +5% P 128 Cifrado* (Sahco) +10%	

Leather Category

A




7763



7738



7060

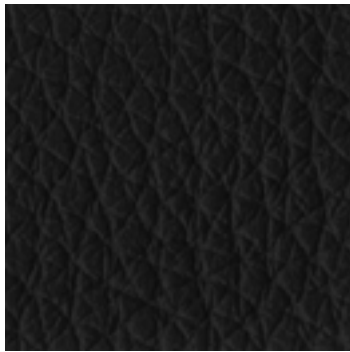

7150

House Leather (Leather)

Category




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.4 - 1.6 mm
Leather type	Pigmented - Corrected grain through dye aniline
Raw material	Chrome tanned raw hides with European origin



286 Zinc



253 Penicillin



212 Papyrus



200 Soul White




290 Porcelain




201 Ivory




219 Sand




220 Desertstorm




292 Caffelatte




297 Mouton




213 Buckskin




214 Clay




215 Avana




295 Tan




221 Lion




222 Cinnamon




223 Swamp



228 Cotto



289 Hezelnut



229 Ecuireil

Prescott (Leather)

Category




TECHNICAL PROPERTIES


PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather



399 Braun



301 Dash



285 Marble



237 Pill



225 Coriander




238 Facepowder




239 Fond-de-tein




283 Energy




296 Light




249 Ciquita




250 Pergamena




287 Lemon Grass




251 Carioca




243 Peach




244 Sunset




246 Claw




245 Redorange



240 Begonia



233 Pot-Purry



299 Henna

Prescott (Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather



Prescott


(Leather)

Category



TECHNICAL PROPERTIES


PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather




230 Ciocco



298 Root



293 Ebony



263 S. Breeze



294 Lime




254 Moud




255 Terragon




256 Aloe




257 Camouflage




258 Birch




264 Aqua Azul




260 Maldiva




259 Oxide




265 Lichene




266 Ottanio




267 Blu Petrol




261 Cedar Green



262 Bottle



268 Polinesia



269 Turquoise

Prescott (Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather



Prescott

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather



204 Iron



304 Grey



210 Graystone



211 Grayshadow



207 Black Ink

Prescott

(Leather)

Category




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather




Natural

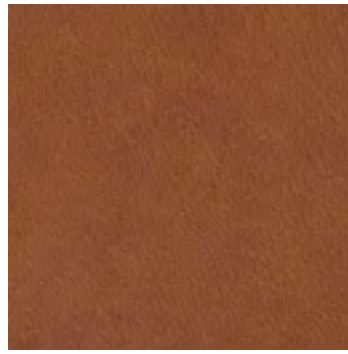

Honey



Brown

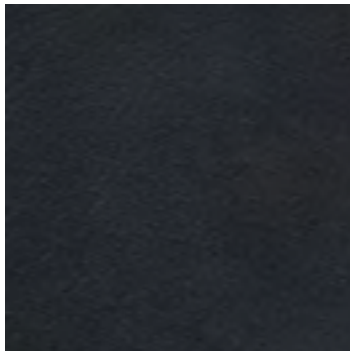

Black

Toscano

(Leather, Tokyo and Stax only)

Category



Category A for Tokyo

Category



Category B for Stax

Leather Category

B




Sabbia



Biscotto




Cuio

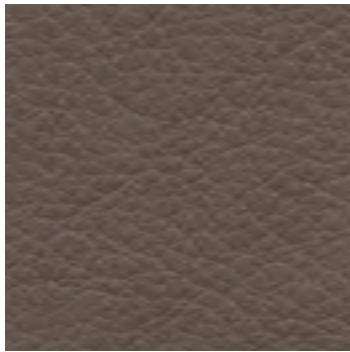

Taupe




Ebano

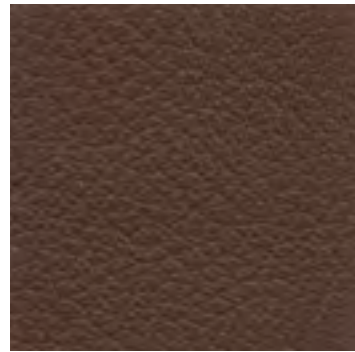

Castagna



Ferro

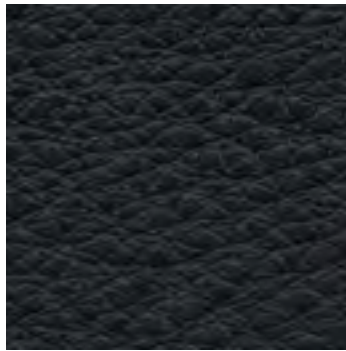

Nero

Cashmere (Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Semi aniline - Full grain aniline through dyed
Raw material	Chrome tanned bovine raw hides



Elmosoft IX

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.1 - 1.3 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Elmosoft IX

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.1 - 1.3 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Elmosoft IX

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.1 - 1.3 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Elmosoft IX

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.1 - 1.3 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Elmonordic IV

(Leather)

TECHNICAL PROPERTIES

Category




PROPERTIES	VALUE
Thickness	1.3 - 1.5 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



87007



98027



88035



18014



01038




43044




44013



02071



02064



00385

Elmonordic IV

(Leather)

TECHNICAL PROPERTIES

Category



PROPERTIES

VALUE

Thickness

1.3 - 1.5 mm

Leather type

Semi - Aniline leather

Raw material

Grain leather from Scandinavian cattle



Lord

(Leather)

Category




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.3 - 1.5 mm
Leather type	Aniline - Full grain through dyeing aniline
Raw material	European raw hides

Leather Category

C

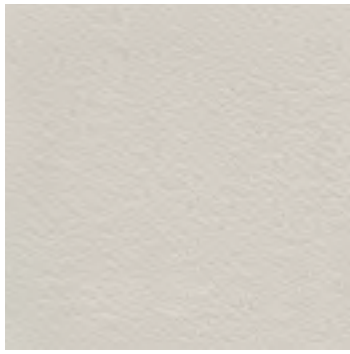

Polvere




Fango



Antracite



Collant

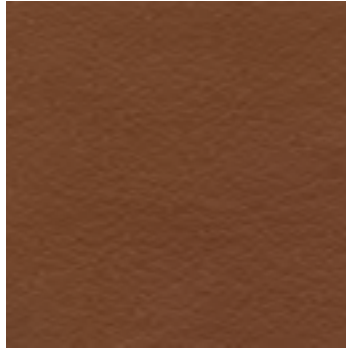

Cuio



Marrone



T. moro

Acquario

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.0 - 1.2 mm
Leather type	Aniline - Full grain through dyeing aniline
Raw material	European raw hides



Shearling

Category



TECHNICAL PROPERTIES

PROPERTIES

VALUE

Thickness

16 mm

Fabric Category

B




01




02



10

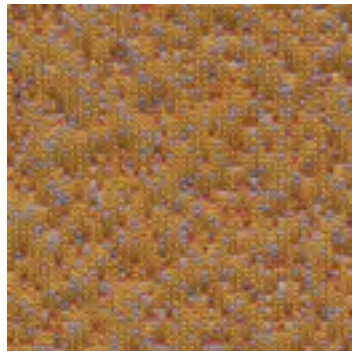


20

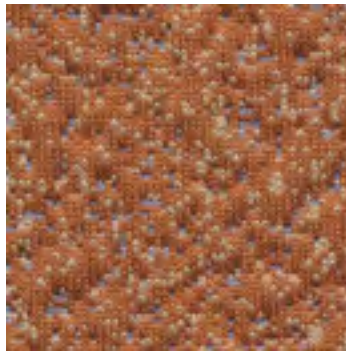


26




51

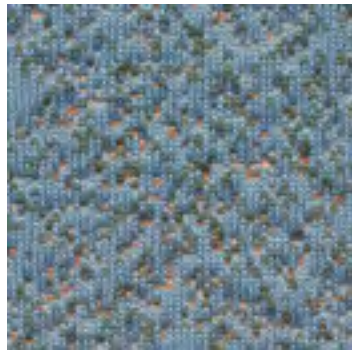

49

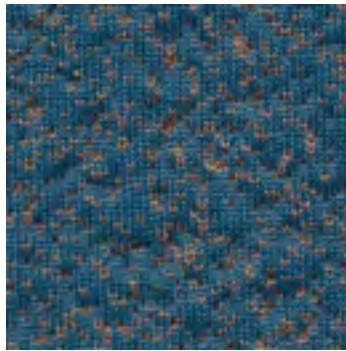

43

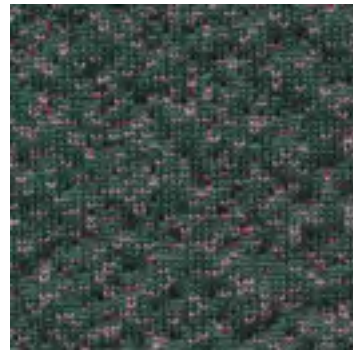

35







Boira




Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	85% Polyester 15% Recycled Polyester
Weight	708 g/m ²
Martindale	35,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	Pilling 3-4, Fuzzing 4-5
Flame resistance	BS 5852 Source 0, EN1021-Part 1, CAL-TB 117 NFPA 260
Fabric care instruction	     

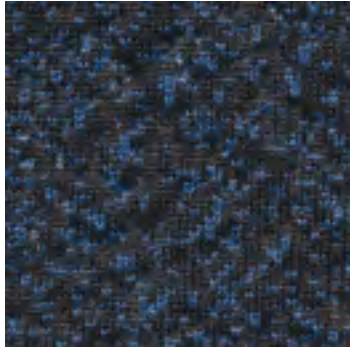

47

Boira




Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	85% Polyester 15% Recycled Polyester
Weight	708 g/m ²
Martindale	35,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	Pilling 3-4, Fuzzing 4-5
Flame resistance	BS 5852 Source 0, EN1021-Part 1, CAL-TB 117 NFPA 260
Fabric care instruction	

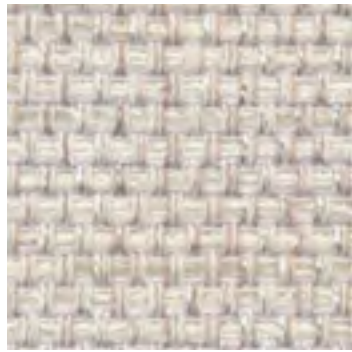

03



06



09




07



08




05

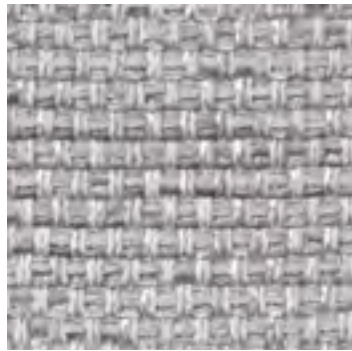

11



38

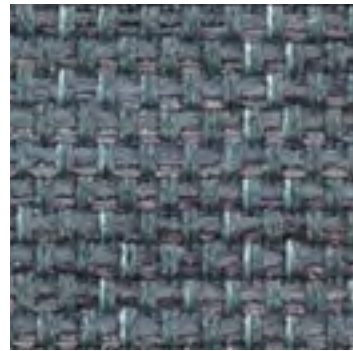

27

Drop

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	59% Cotton 41% Polyester
Weight	610 g/ml
Martindale	≥25,000
Light fastness	≥4/5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	

Category





35

Drop

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	59% Cotton 41% Polyester
Weight	610 g/ml
Martindale	≥25,000
Light fastness	≥4/5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	

Category






14

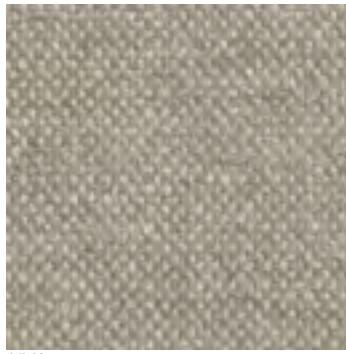

15/3



109

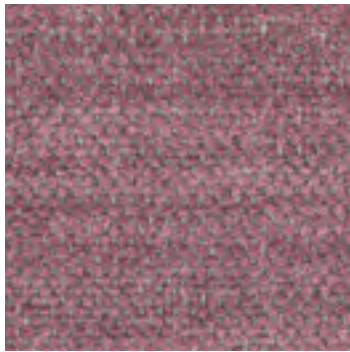


34/3




42



200

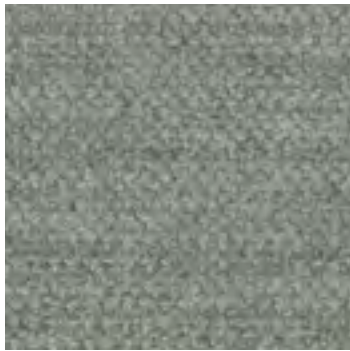

34/2

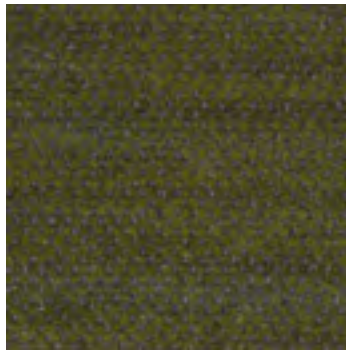

2781



20/1

EMYR GRS



Category




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	50% Polyester 33% Recycled Polyacrylic 13% Recycled Wool 3% Recycled Other fibers
Weight	460 g/m ²
Martindale	>96,000
Light resistance	4/5
Pilling	4
Flame resistance	BS 5852-Part 0-1(C&M), CAL-TB 117:2013
Fabric care instruction	



05/2

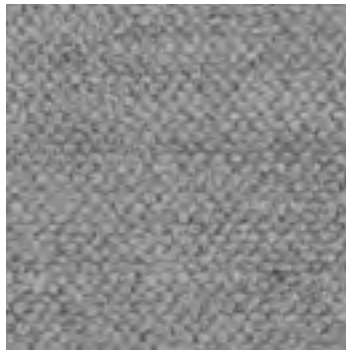

34/1



07/1

EMYR GRS



TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	50% Polyester 33% Recycled Polyacrylic 3% Recycled Wool 3% Recycled Other fibers
Weight	460 g/m ²
Martindale	>96,000
Light resistance	4/5
Pilling	4
Flame resistance	BS 5852-Part 0-1(C&M), CAL-TB 117:2013
Fabric care instruction	

Category







200

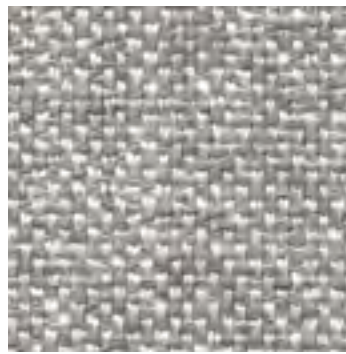

02

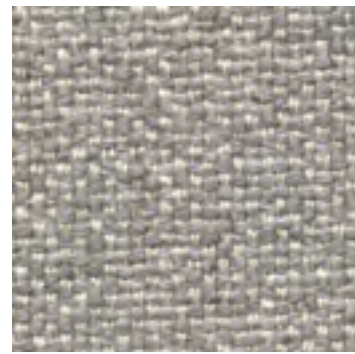


205

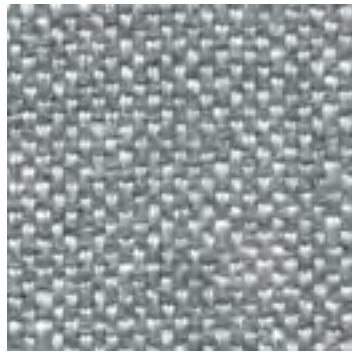

232



233

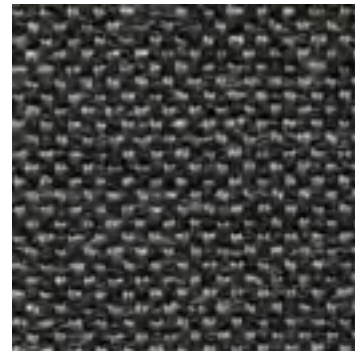


119



221





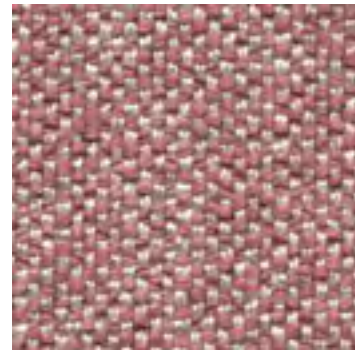


03



237


Lecco

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	30% Viscose 27% Acrylic 19% Linen 14% Cotton 10% Polyester
Weight	770 g/ml
Martindale	25,000
Light fastness	4/5
Fastness to rubbing	Dry 4, Wet 4
Pilling	4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	    

Category




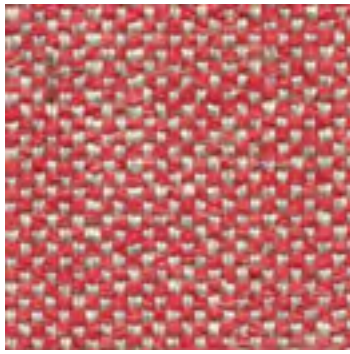


224




214

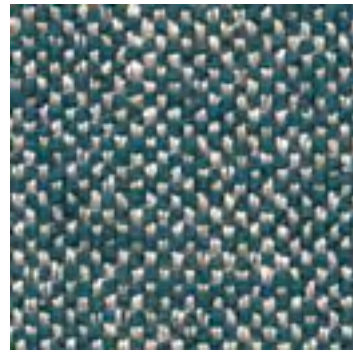

225

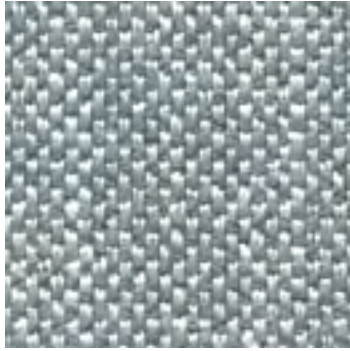

04

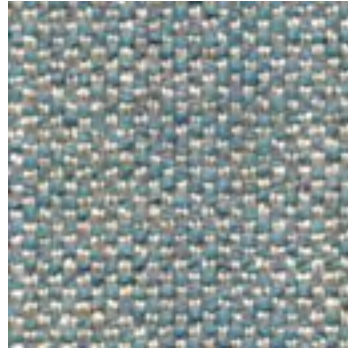

234



126

Lecco

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	30% Viscose 27% Acrylic 19% Linen 14% Cotton 10% Polyester
Weight	770 g/ml
Martindale	25,000
Light fastness	4/5
Fastness to rubbing	Dry 4, Wet 4
Pilling	4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	

Category






05



07



10

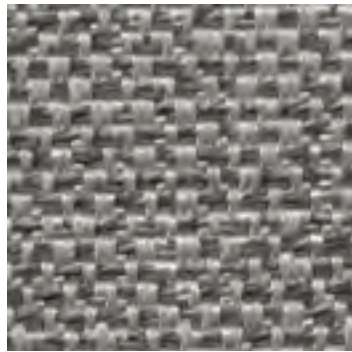


50




54



51

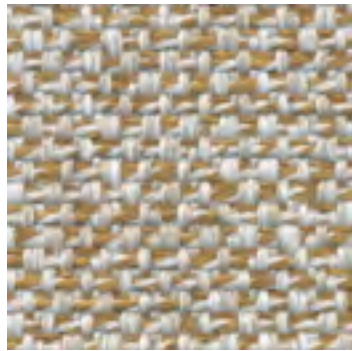

20

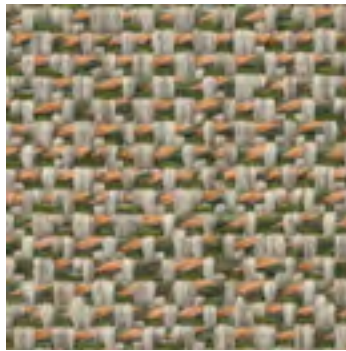

38



26

Moulin

PERFORMANCE+



Category




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	80% Polypropylene 14% Recycled Polyester 3% Recycled Cotton 3% Recycled Other Fibers
Weight	550 g/m ²
Martindale	80,000
Light fastness	>6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9157 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	



47

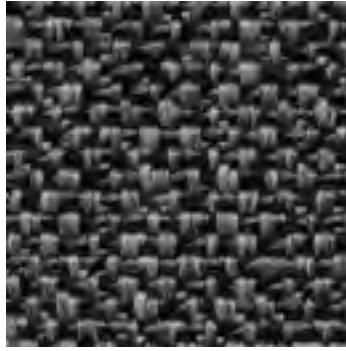

52

Moulin

PERFORMANCE+



STANDARD
100

Category



TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	80% Polypropylene 14% Recycled Polyester 3% Recycled Cotton 3% Recycled Other Fibers
Weight	550 g/m ²
Martindale	80,000
Light fastness	>6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9157 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	



05




07

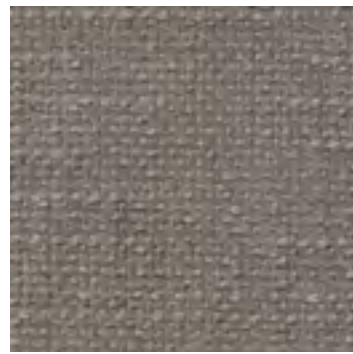

18




32

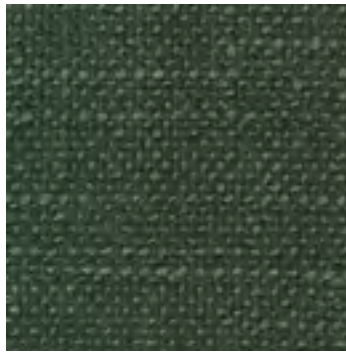

38




45

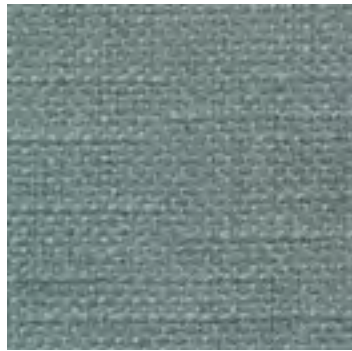

33



35

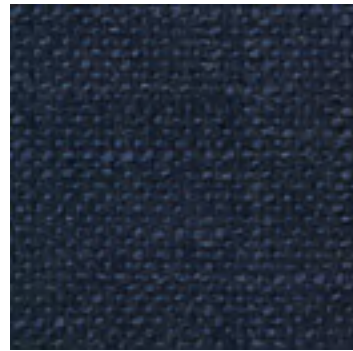

47







Noah




Category




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Recycled Polyester
Weight	543 g/m ²
Martindale	>100,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Source 0, EN1021-Part 1:2006 CAL-TB 117:2013, NFPA 260:2013
Fabric care instruction	     

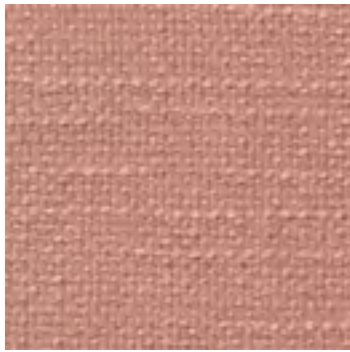

71

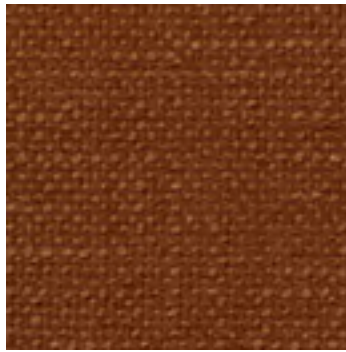

26



53







Noah



Category



TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	100% Recycled Polyester
Weight	543 g/m ²
Martindale	>100,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Source 0, EN1021-Part 1:2006 CAL-TB 117:2013, NFPA 260:2013
Fabric care instruction	     



01



02

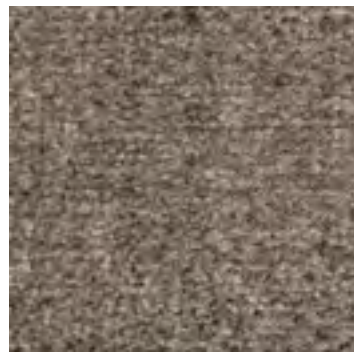


18



27



05

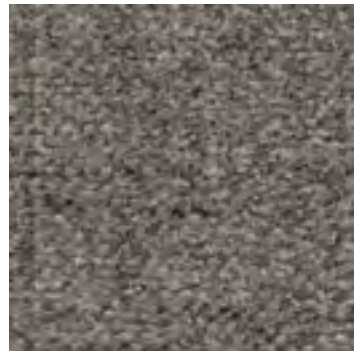

08

Ombra







PERFORMANCE+



Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	65% Polyester 35% Recycled Polyester
Weight	561 g/m ²
Martindale	100,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9157 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	     



214




13



15




01

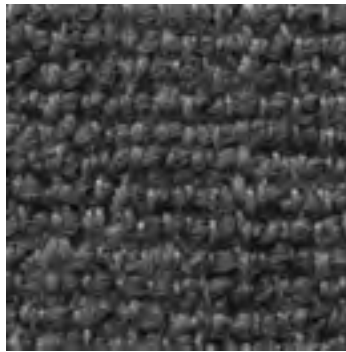

206




101

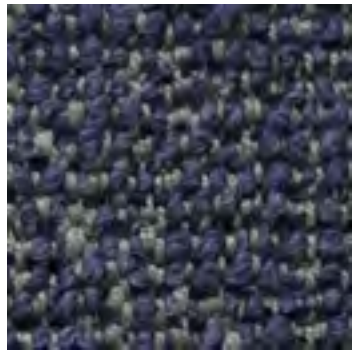

207





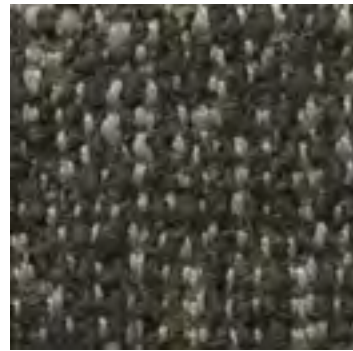


201



217

Rialto

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	46% Cotton 24% Acrylic 13% Virgin Wool 11% Viscose 6% Linen
Weight	830 g/ml
Martindale	18,000
Light fastness	4
Fastness to rubbing	Dry 4, Wet 4
Pilling	4
Fabric care instruction	    

Category










202



216

Rialto

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	46% Cotton 24% Acrylic 13% Virgin Wool 11% Viscose 6% Linen
Weight	830 g/ml
Martindale	18,000
Light fastness	4
Fastness to rubbing	Dry 4, Wet 4
Pilling	4
Fabric care instruction	    

Category







05

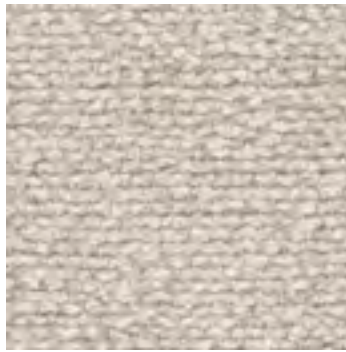

07

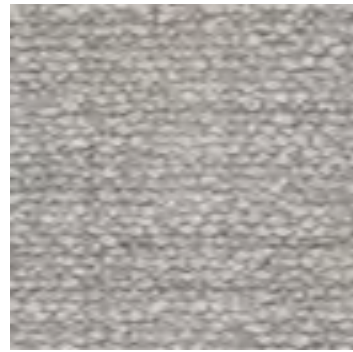


11

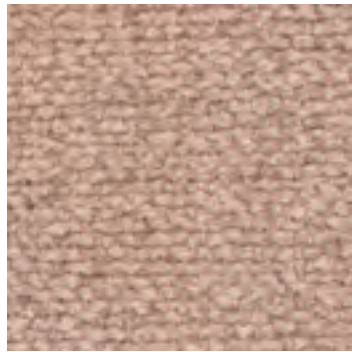


71




19

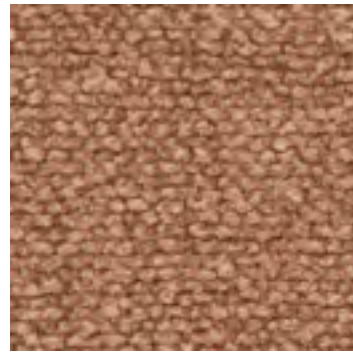


26

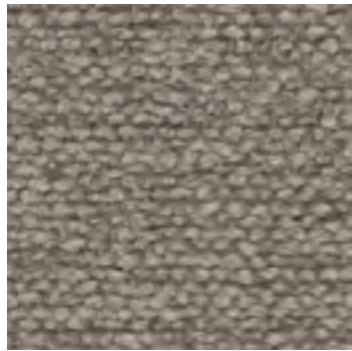

18

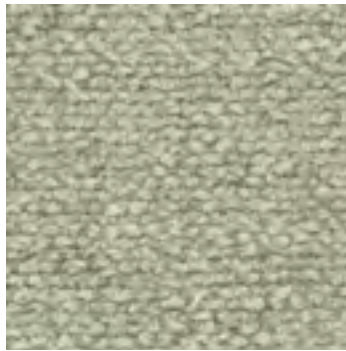

39

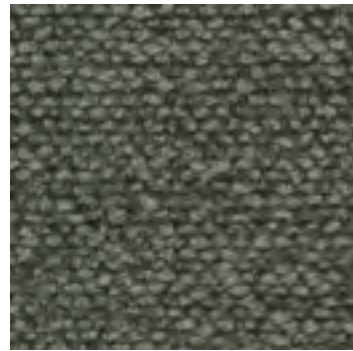

32

Sorra








PERFORMANCE+




Category




TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	60% Polyester 40% Recycled Polyester
Weight	654 g/m ²
Martindale	80,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9175 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	      

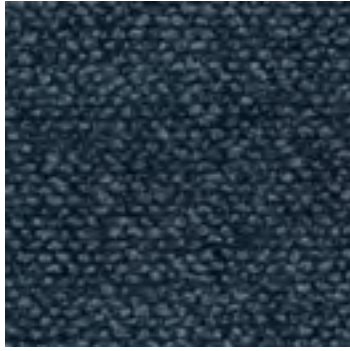


43

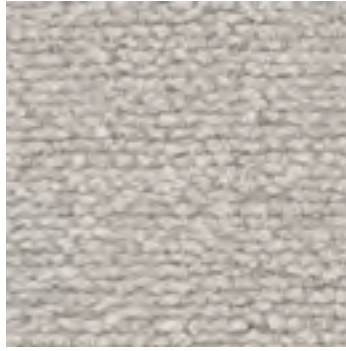


51

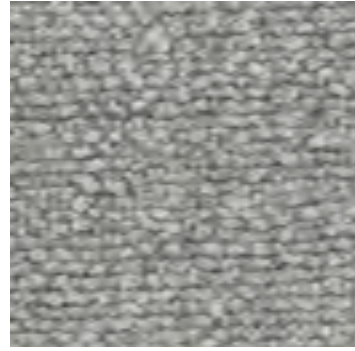

54

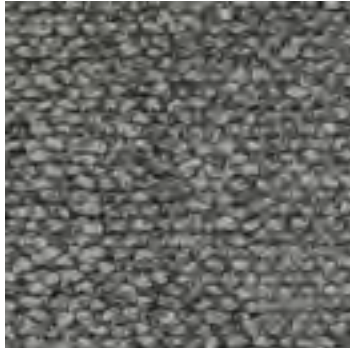

52

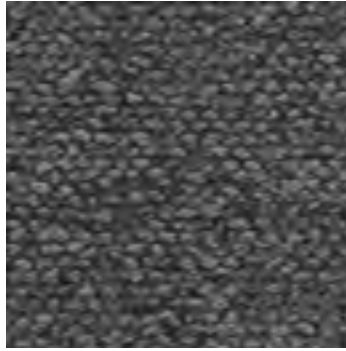

53

Sorra







PERFORMANCE+



Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	60% Polyester 40% Recycled Polyester
Weight	654 g/m ²
Martindale	80,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9175 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	     



11




02




21



13

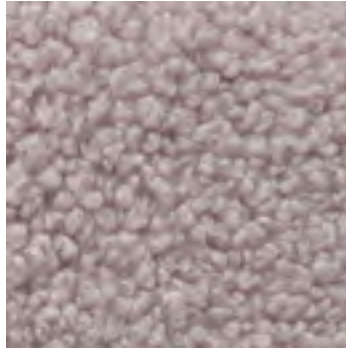

24

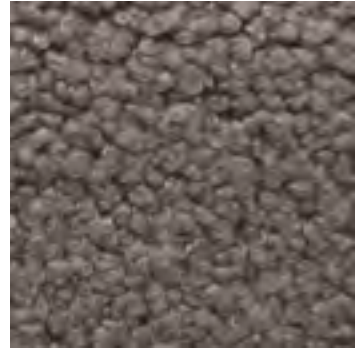

10









33



34

Teddybea

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	100% Polyester
Weight	800 g/ml
Martindale	100,000
Light fastness	5
Fastness to rubbing	Dry 5, Wet 4
Pilling	4
Flame resistance	CAL-TB 117:2013, BS 5852 P1/2 with coating
Fabric care instruction	     

Category



Fabric Category


C

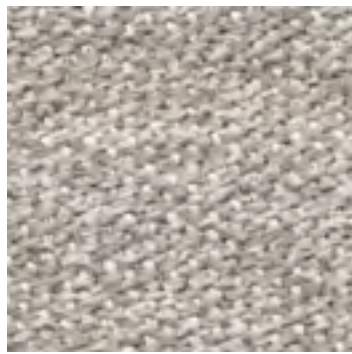


01




01/1

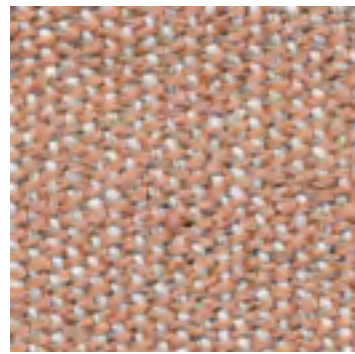


01/3

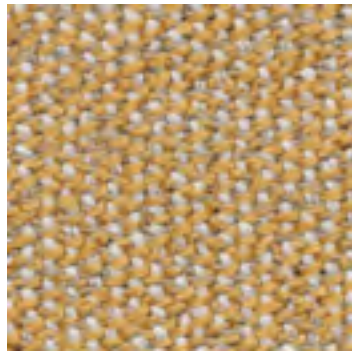


01/4

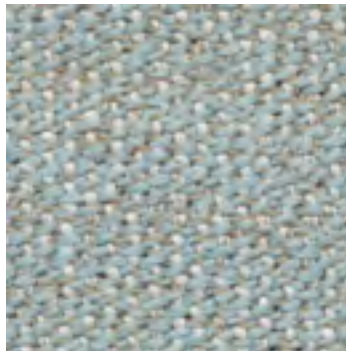


01/6

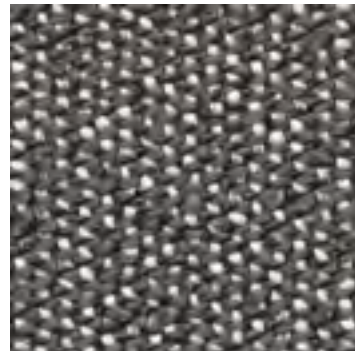


01/5

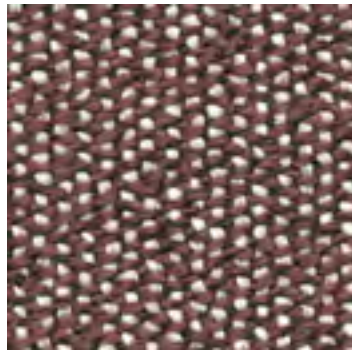

02

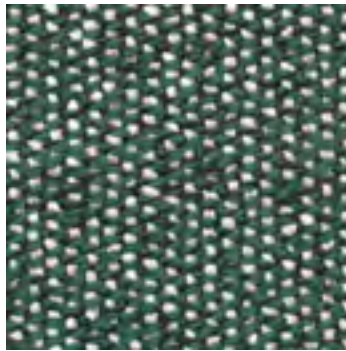

02/1

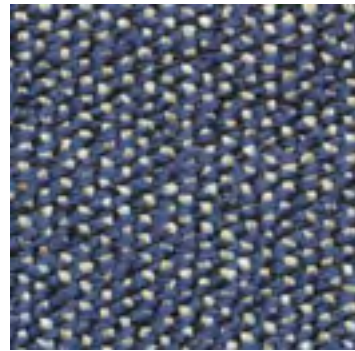

02/3

Delta

PERFORMANCE+

INDOOR / OUTDOOR

Category



TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	80% Polypropylene 20% Polyester
Weight	590 g/m ²
Martindale	80,000
Light fastness	7
Fastness to rubbing	Dry 4/5, Wet 5
Pilling	4/5
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	




90



03

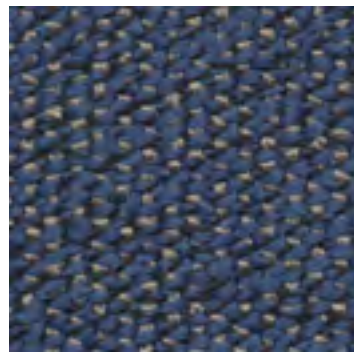


03/1

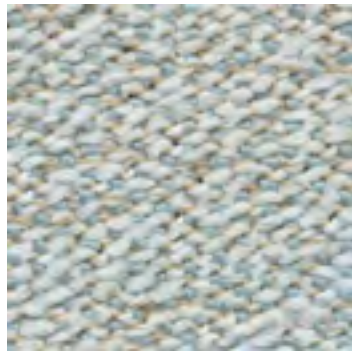


80




80/1

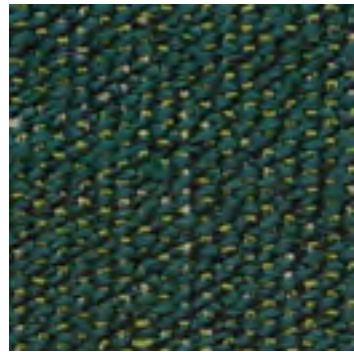


15

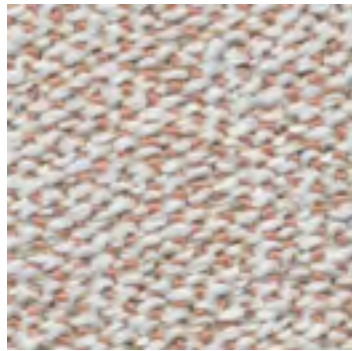

45/1

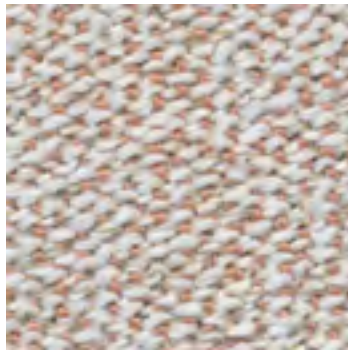

45

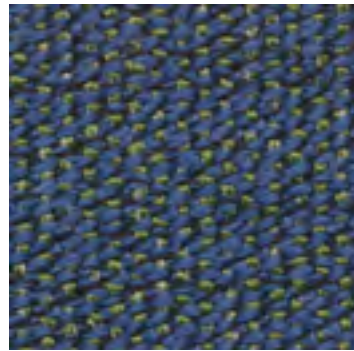

15/1

Delta

PERFORMANCE+

INDOOR / OUTDOOR

Category




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	80% Polypropylene 20% Polyester
Weight	590 g/m ²
Martindale	80,000
Light fastness	7
Fastness to rubbing	Dry 4/5, Wet 5
Pilling	4/5
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	




01

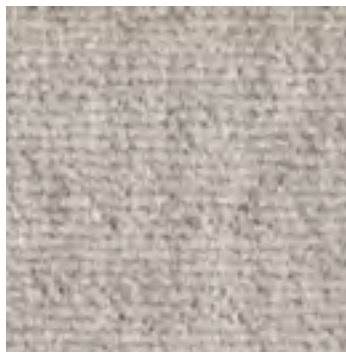

166




444

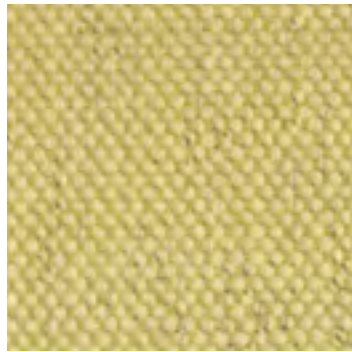


20



21

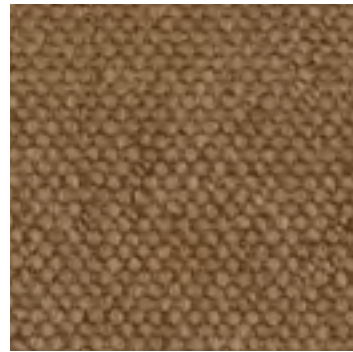


15

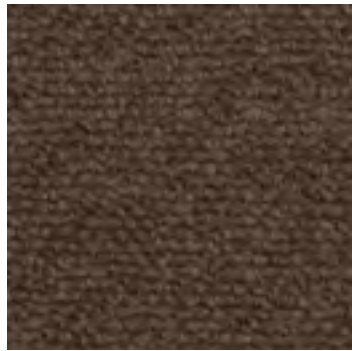

445





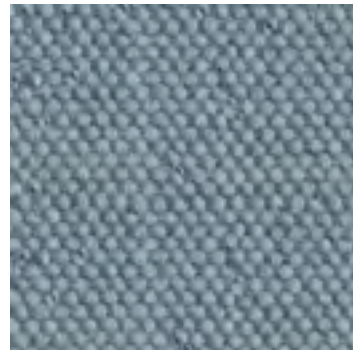


443



11


Donnafugata Soft

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	40% Viscose 35% Acrylic 15% Cotton 10% Polyester
Weight	950 g/mtl
Martindale	50,000
Light fastness	5
Fastness to rubbing	Dry 4/5, Wet 3/4
Pilling	4
Flame resistance	BS 1021-1&2, CAL-TB 117:2013+2015
Fabric care instruction	    

Category




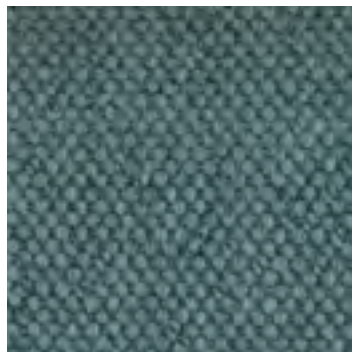


12

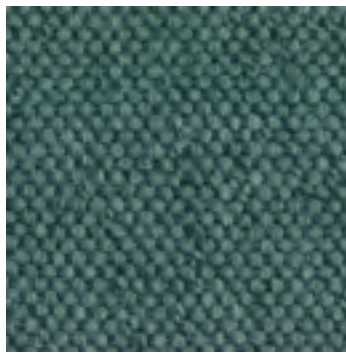

22

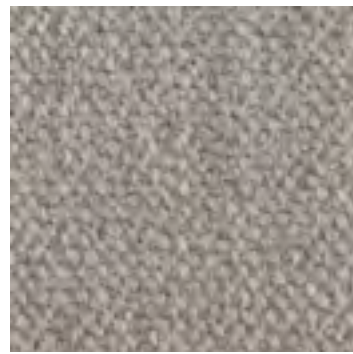


16

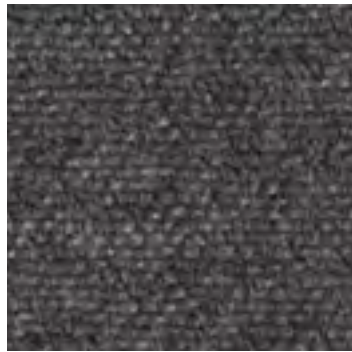


168



13

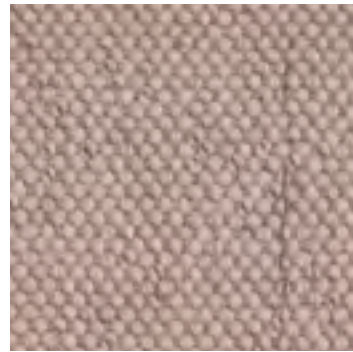

17

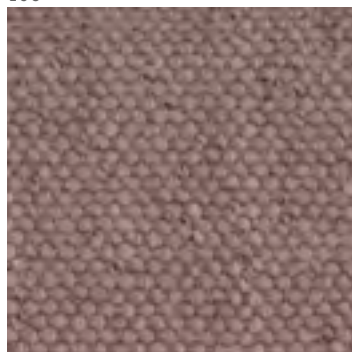

18








14



19

Donnafugata Soft

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	40% Viscose 35% Acrylic 15% Cotton 10% Polyester
Weight	950 g/mtl
Martindale	50,000
Light fastness	5
Fastness to rubbing	Dry 4/5, Wet 3/4
Pilling	4
Flame resistance	BS 1021-1&2, CAL-TB 117:2013+2015
Fabric care instruction	    


Category





Gaja Classic

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	530 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	EN 1021 1&2, BS 5852 Crib 5, BS 5852 0&1 BS 476 P.7 Class 1, CAL-TB 117:2013
Fabric care instruction	

Category




[Complete specifications at gabriel.dk](http://gabriel.dk)



Gaja Classic

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	530 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	EN 1021 1&2, BS 5852 Crib 5, BS 5852 0&1 BS 476 P.7 Class 1, CAL-TB 117:2013
Fabric care instruction	

Category




[Complete specifications at gabriel.dk](http://gabriel.dk)



67015



67009



66057




67005



68024



68013



68002




68035



68048

Gaja Classic

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	530 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	EN 1021 1&2, BS 5852 Crib 5, BS 5852 0&1 BS 476 P.7 Class 1, CAL-TB 117:2013
Fabric care instruction	    

Category




[Complete specifications at gabriel.dk](http://gabriel.dk)



Maple

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	81% Viscose 15% Linen 4% Polyester
Weight	910 g/ml
Martindale	30,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, AS/NZS 1530.3&3837 class 2
Fabric care instruction	


Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)



0542



0562




0662



0722



0732



0742



0762



0792




0832



0862

Maple

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	81% Viscose 15% Linen 4% Polyester
Weight	910 g/ml
Martindale	30,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, AS/NZS 1530.3&3837 class 2
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)



014



009



013



011



005




007



001



002

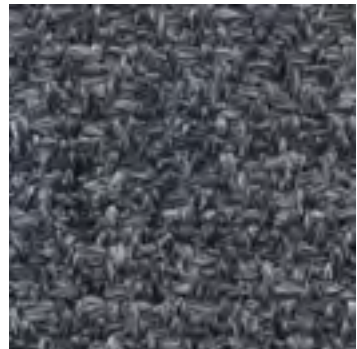

006

Moovie

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	30% Linen 30% Viscose 25% Polyester 15% Cotton
Weight	940 g/ml
Martindale	≥50,000
Light fastness	≥4/5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	

Category






Nina

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	39% Linen 27% Jute 24% Viscose 10% Cotton
Weight	930 g/ml
Martindale	25,000
Light fastness	≥3/4
Fastness to rubbing	Dry ≥4, Wet ≥3
Pilling	≥3/4
Flame resistance	BS 5852-1:1979, CAL-TB 117:20/03
Fabric care instruction	

Category






40




51



21



39



52



4

Nina

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	39% Linen 27% Jute 24% Viscose 10% Cotton
Weight	930 g/ml
Martindale	25,000
Light fastness	≥3/4
Fastness to rubbing	Dry ≥4, Wet ≥3
Pilling	≥3/4
Flame resistance	BS 5852-1:1979, CAL-TB 117:20/03
Fabric care instruction	

Category





Nobilis

(Velvet)

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	100% Cotton
Weight	440 g/m ²
Martindale	>65,000
Light fastness	5
Fastness to rubbing	Dry 5, Wet 4
Pilling	5
Flame resistance	EN 1021-1&2:2006, BS 5852:2006 (Crib 5) CAL-TB 117:2013, IMO 2010 FTP CODE, M1 UNI 9175 Class IIM
Fabric care instruction	

Category





21



33



30



16

Nobilis

(Velvet)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Cotton
Weight	440 g/m ²
Martindale	>65,000
Light fastness	5
Fastness to rubbing	Dry 5, Wet 4
Pilling	5
Flame resistance	EN 1021-1&2:2006, BS 5852:2006 (Crib 5) CAL-TB 117:2013, IMO 2010 FTP CODE, M1 UNI 9175 Class 1IM
Fabric care instruction	

Category





4



33



19




21



14



16

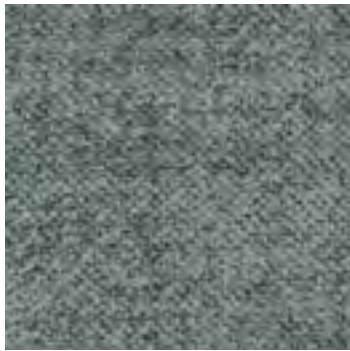

24





27



31

Quiche MT

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Cotton 38% Viscose 15% Polyester 5% Linen
Weight	980 g/mtl
Martindale	25,000
Light fastness	5
Fastness to rubbing	Dry 4, Wet 3/4
Pilling	4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	    

Category





29


Quiche MT

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Cotton 38% Viscose 15% Polyester 5% Linen
Weight	980 g/mtl
Martindale	25,000
Light fastness	5
Fastness to rubbing	Dry 4, Wet 3/4
Pilling	4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	

Category




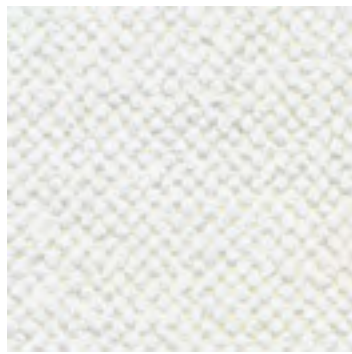

3152




3145

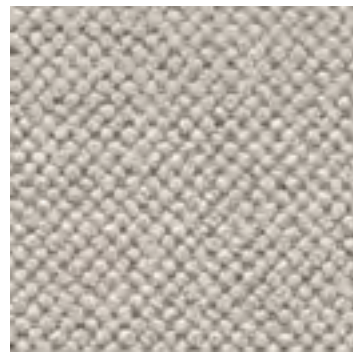

3146



3147

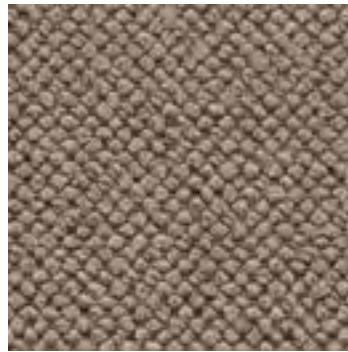

3148



3149



3157



3156



3155

Relax

PERFORMANCE+

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Polyester
Weight	644 g/mtq
Martindale	100,000
Light fastness	4/5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	    

Category







3154




3153

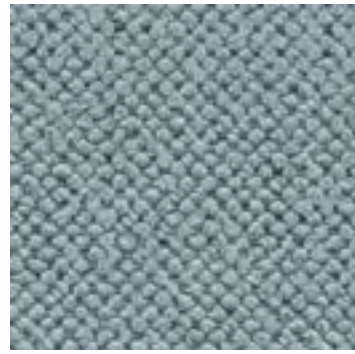

3163

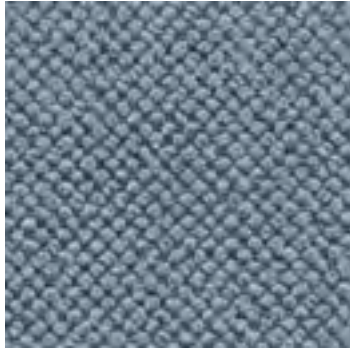

3164




3165



3161



3151





3168

Relax

PERFORMANCE+

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Polyester
Weight	644 g/mtq
Martindale	100,000
Light fastness	4/5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	    

Category





Sobral

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	53% Viscose 24% Linen 21% Cotton 2% Polyamide
Weight	700 g/m ²
Martindale	>50,000
Light fastness	3-5
Fastness to rubbing	Dry 5, Wet 3/4
Pilling	3/4
Fabric care instruction	

Category







07



03

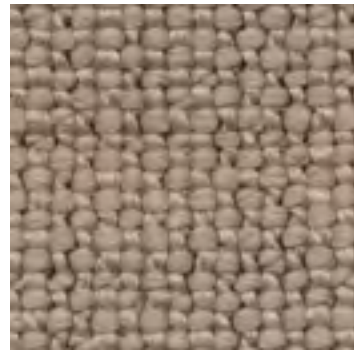

04

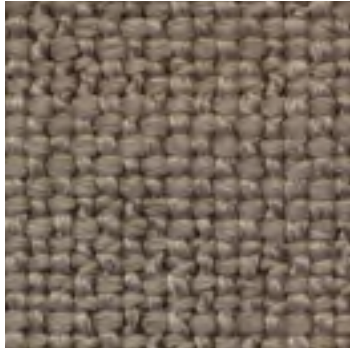

05



06




12



11





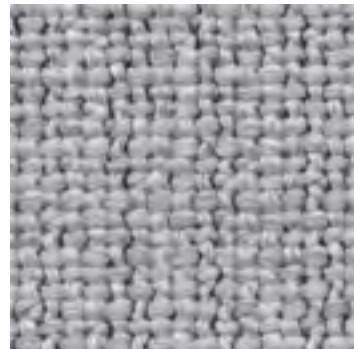


10



08

Tundra 01

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Viscose 36% Cotton 16% Acrylic 6% Polyester
Weight	720 g/m ²
Martindale	30,000
Light fastness	5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	3/4
Flame resistance	BS 58529:1979, EN 1021-1&2, NFPA 260:2013 CAL-TB 117:2013
Fabric care instruction	    

Category



Fabric Category

D




601/12



601/7




601/1

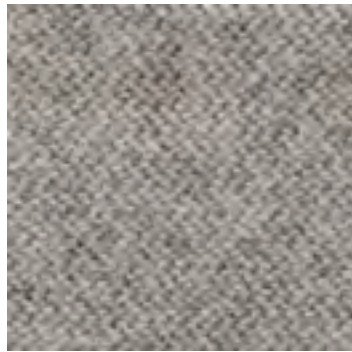

604/7




604/9

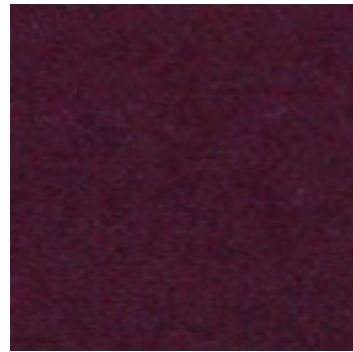


855



609/3

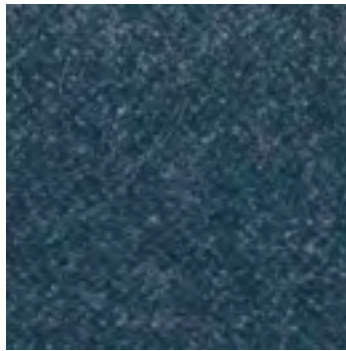

608/3

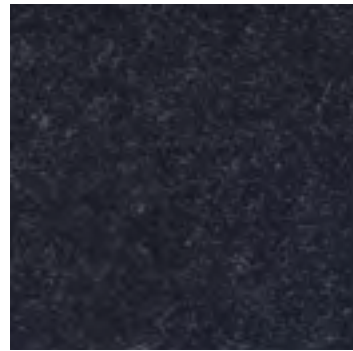






609/7

Annik GRS



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	44% Recycled Wool 24% Wool 6% Alpaca 16% Polyamide 3% Recycled Other Fibers 3% Recycled Polyacrylic
Weight	565 g/m ²
Martindale	>100,000
Light resistance	4/5
Pilling	3
Flame resistance	BS 5852-1979, CAL-TB 117:2013 NFPA 260:2019
Fabric care instruction	    

Category





609/9

Annik GRS



Category



TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	44% Recycled Wool 24% Wool 6% Alpaca 16% Polyamide 3% Recycled Other Fibers 3% Recycled Polyacrylic
Weight	565 g/m ²
Martindale	>100,000
Light resistance	4/5
Pilling	3
Flame resistance	BS 5852-1979, CAL-TB 117:2013 NFPA 260:2019
Fabric care instruction	




01



24

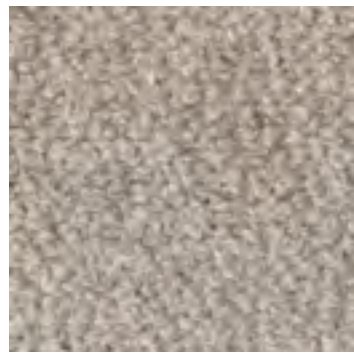


02

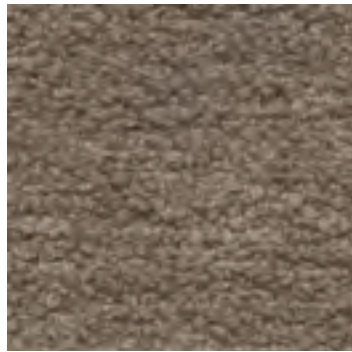

04



05

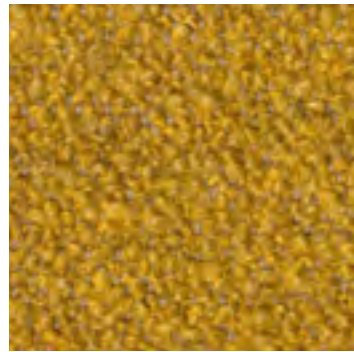


06



21





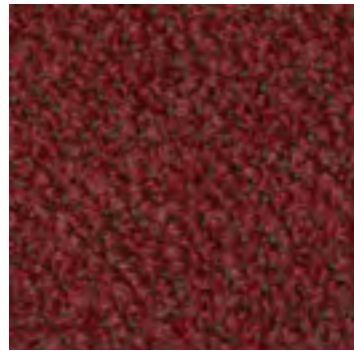


23



18

Barnum

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	45% Cotton 19% Viscose 15% Wool 13% Acrylic 8% Polyester
Weight	950 g/ml
Martindale	≥60,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	    

Category





22



09




08



07



10

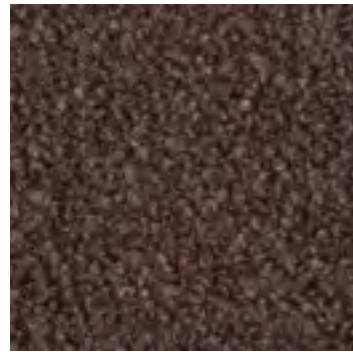


11



19





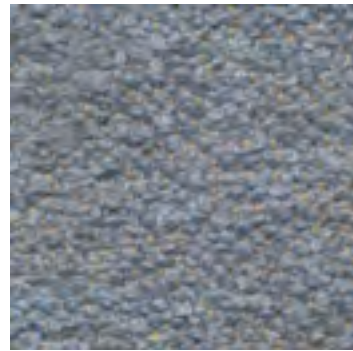


16



15

Barnum

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	45% Cotton 19% Viscose 15% Wool 13% Acrylic 8% Polyester
Weight	950 g/ml
Martindale	≥60,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	    

Category





14



12



13



03

Barnum

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	45% Cotton 19% Viscose 15% Wool 13% Acrylic 8% Polyester
Weight	950 g/ml
Martindale	≥60,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	




Category





Credo


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	870 g/ml
Martindale	100,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  


Category




[Complete specifications at rohi.com](http://rohi.com)




Navy



Forest




Aloe



Jaspis



Walnut




Fango




Schiefer



Macadamia



Taupe






Calla



Snow

Credo

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	870 g/ml
Martindale	100,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  


Category




[Complete specifications at rohi.com](http://rohi.com)




01

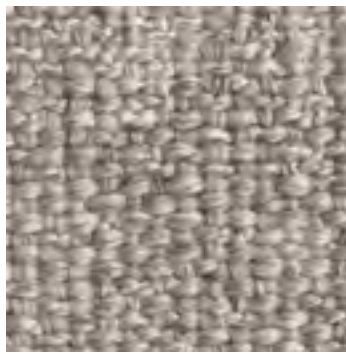


02

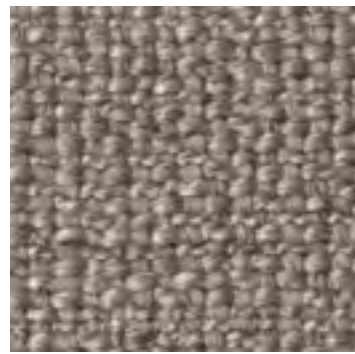

03

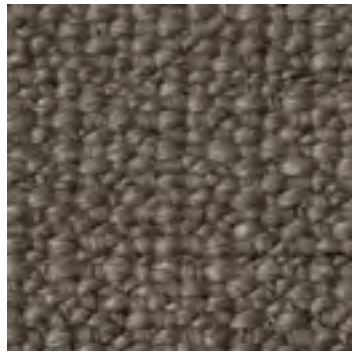


05

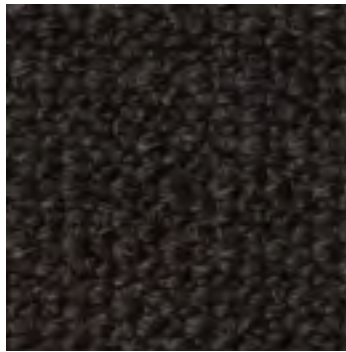


10



09

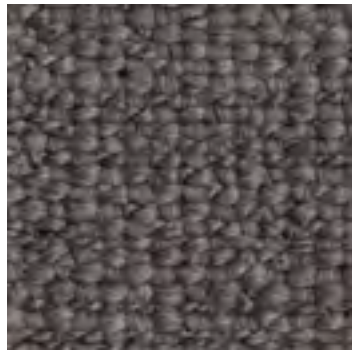

08

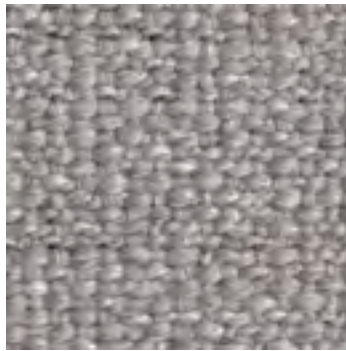

04



8/1

Esopo 01

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	33% Acrylic 25% Viscose 17% Wool 14% Polyester 11% Cotton
Weight	800 g/m ²
Martindale	45,000
Light fastness	3-5
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852-1-1979 C&M, CAL-TB 117:2013 EN 1021-1&2
Fabric care instruction	

Category






9/1

Esopo 01

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	33% Acrylic 25% Viscose 17% Wool 14% Polyester 11% Cotton
Weight	800 g/m ²
Martindale	45,000
Light fastness	3-5
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852-1-1979 C&M, CAL-TB 117:2013 EN 1021-1&2
Fabric care instruction	


Category





Europost 2

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	800 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4
Flame resistance	EN 1021-1&2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1-0&1, Regulations 1988
Fabric care instruction	

Category



[Complete specifications at gabriel.dk](http://gabriel.dk)



Europost 2


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	800 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4
Flame resistance	EN 1021-1&2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1-0&1, Regulations 1988
Fabric care instruction	

Category




[Complete specifications at gabriel.dk](http://gabriel.dk)

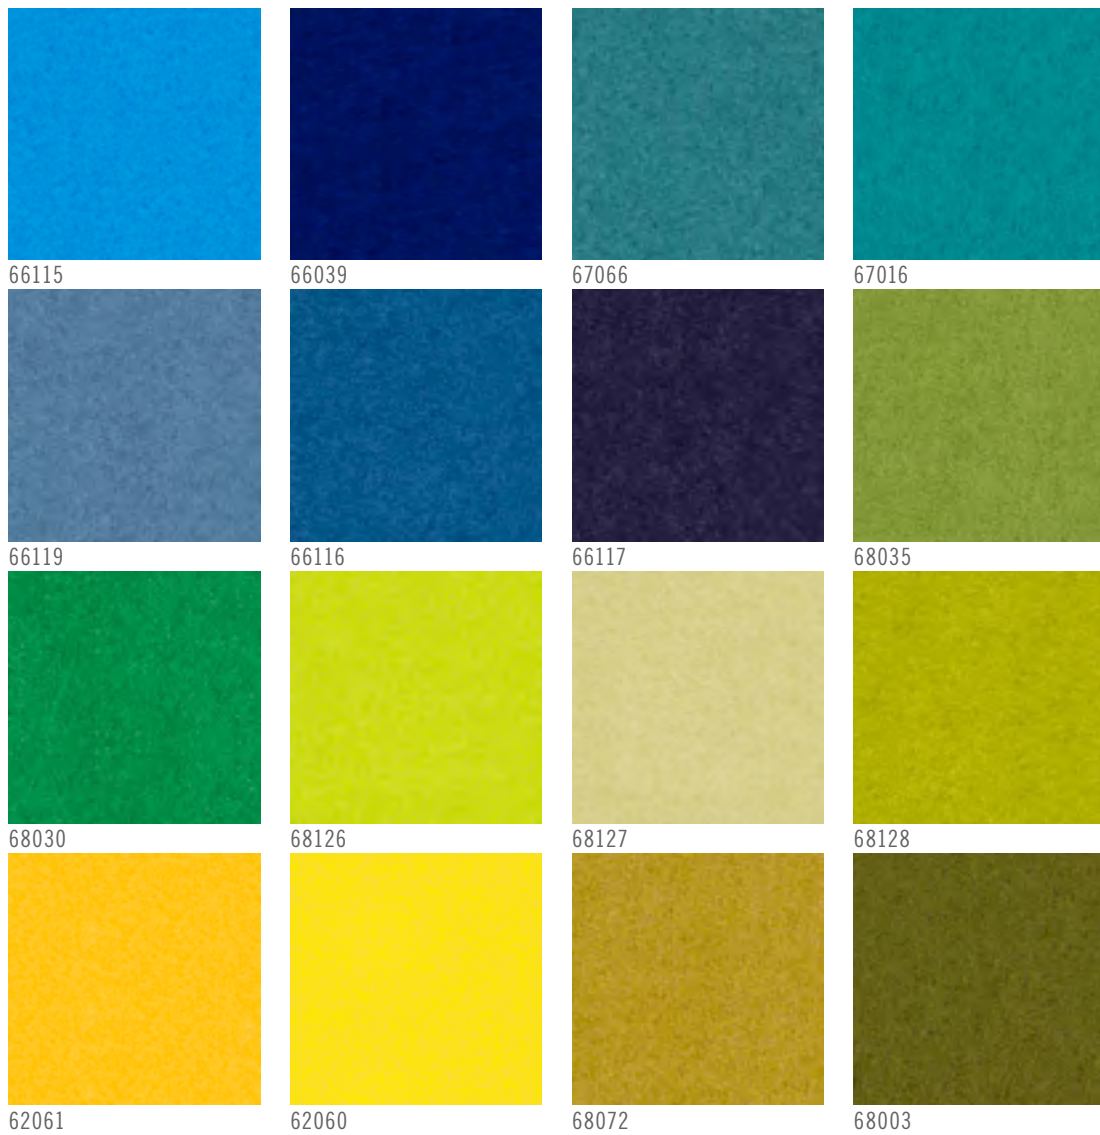

Europost 2

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	800 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4
Flame resistance	EN 1021-1&2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1-0&1, Regulations 1988
Fabric care instruction	


Category




[Complete specifications at gabriel.dk](http://gabriel.dk)




01

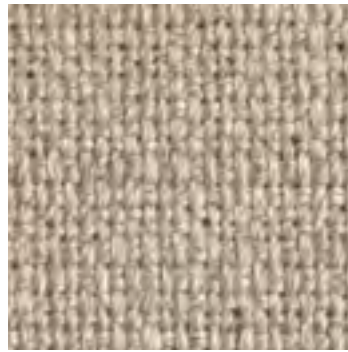

1/1

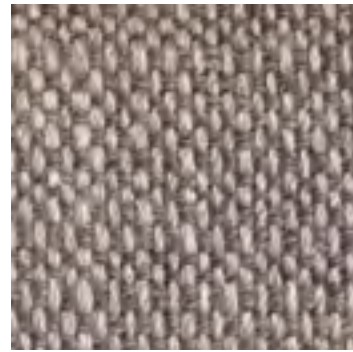


1/3

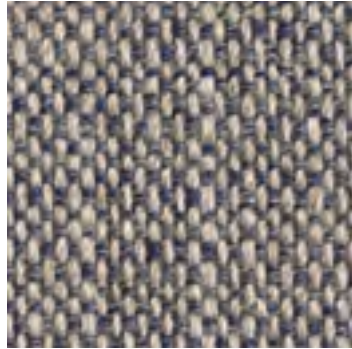


1/6



1/7

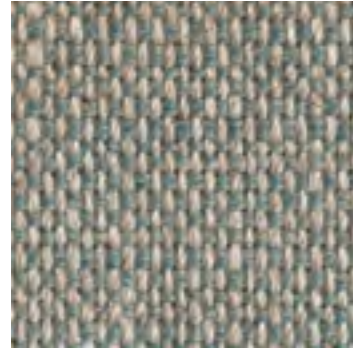

1/8

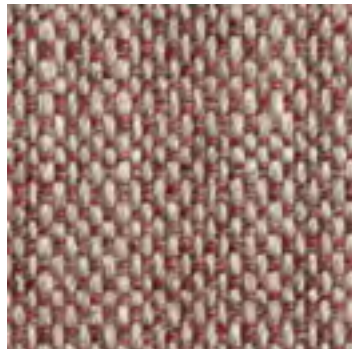

1/11



1/12



1/13


Katmandu

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	36% Viscose 32% Linen 24% Acrylic 4% Polyamide 4% Polyester
Weight	710 g/m ²
Martindale	45,000
Light fastness	3/4
Fastness to rubbing	Dry 5, Wet 4/5
Pilling	3/4
Flame resistance	BS 5852-1-1979 C&M, CAL-TB 117:2013
Fabric care instruction	

Category



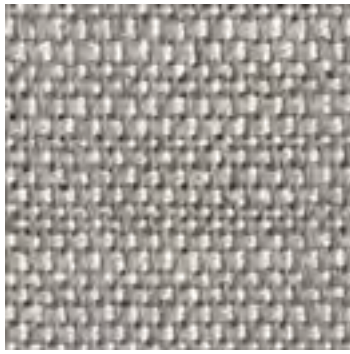

3/2



1/15



3/3

Katmandu

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	36% Viscose 32% Linen 24% Acrylic 4% Polyamide 4% Polyester
Weight	710 g/m ²
Martindale	45,000
Light fastness	3/4
Fastness to rubbing	Dry 5, Wet 4/5
Pilling	3/4
Flame resistance	BS 5852-1-1979 C&M, CAL-TB 117:2013
Fabric care instruction	


Category





Luna 2


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	90% Wool 10% Polyamide
Weight	680 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3-4
Flame resistance	EN 1021-1&2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1-0&1, Regulations 1988
Fabric care instruction	

Category



[Complete specifications at gabriel.dk](http://gabriel.dk)



4006



4411




4413



4301



4111




4104



4204



4101



4102

Luna 2


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	90% Wool 10% Polyamide
Weight	680 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3-4
Flame resistance	EN 1021-1&2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1-0&1, Regulations 1988
Fabric care instruction	


Category




[Complete specifications at gabriel.dk](http://gabriel.dk)



Melba




Sanddorn



Breva



Indio




Glow




Corn




Mirror



Flanell

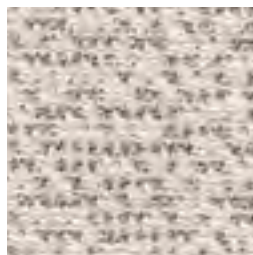

Calla



Aqua



Papillon



Reseda



Sesam



Night



Secret



Pepper



Kies



Fels






Carbon



Arion

Mica

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamid
Weight	840 g/ml
Martindale	50,000
Fabric care instruction	  

Category






Black




Jungle




Lanoso




Ivy




Taupe



Torba



Delphi



Peat






Crisp



Amber

Mica

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamid
Weight	840 g/ml
Martindale	50,000
Fabric care instruction	  

Category






0122

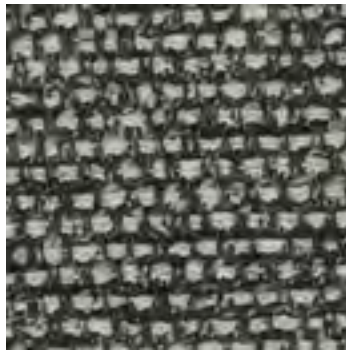

0152




0192

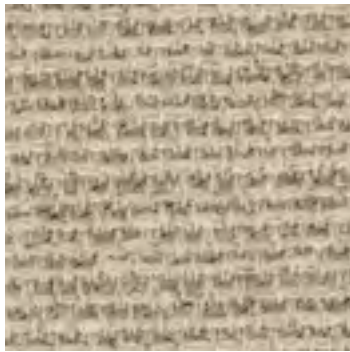

0202



0222

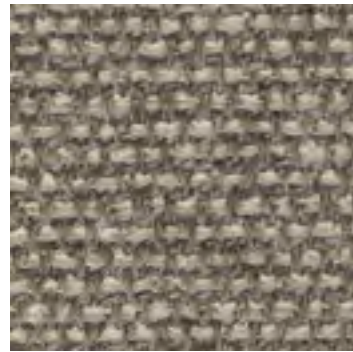


0242



0262




0292

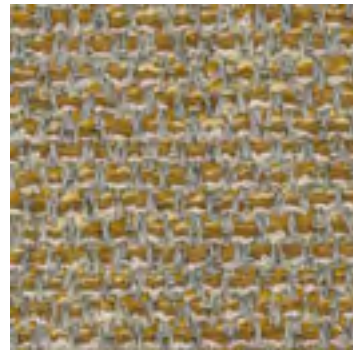

0442

Savanna

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	34% Polyester 31% New Wool 4% Cotton 26% Polyacrylic 3% Nylon 2% Linen
Weight	681 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3
Flame resistance	AS/NZS 3837 Class 2, CAL-TB 117:2013 EN 1021-1/2, BS 5852 part 1 with treatment
Fabric care instruction	

[Complete specifications at kvadrat.dk](http://www.kvadrat.dk)

Category






0622





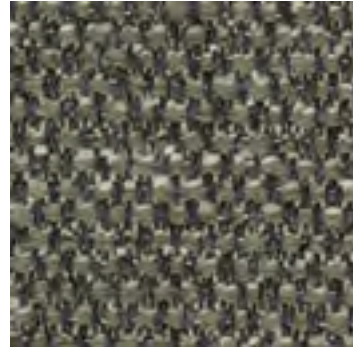


0672



0952

Savanna

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	34% Polyester 31% New Wool 4% Cotton 26% Polyacrylic 3% Nylon 2% Linen
Weight	681 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3
Flame resistance	AS/NZS 3837 Class 2, CAL-TB 117:2013 EN 1021-1/2, BS 5852 part 1 with treatment
Fabric care instruction	    

Category






[Complete specifications at kvadrat.dk](http://kvadrat.dk)



Sera


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% Virgin Wool 6% Polyamide
Weight	910 g/ml
Martindale	122,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  


Category




[Complete specifications at rohi.com](http://rohi.com)




Chutney




Berry




Lotus




Tivoli




Mirage



Mare



Torba



Anthrazit






Amur



Rosewood

Sera

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% Virgin Wool 6% Polyamide
Weight	910 g/ml
Martindale	122,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  

Category






[Complete specifications at rohi.com](http://rohi.com)



Shake


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	660 g/ml
Martindale	≥70,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, ÖNORM B1/Q1 UNI 9175 1IM, BS 5852 Part 1:1979
Fabric care instruction	  

Category



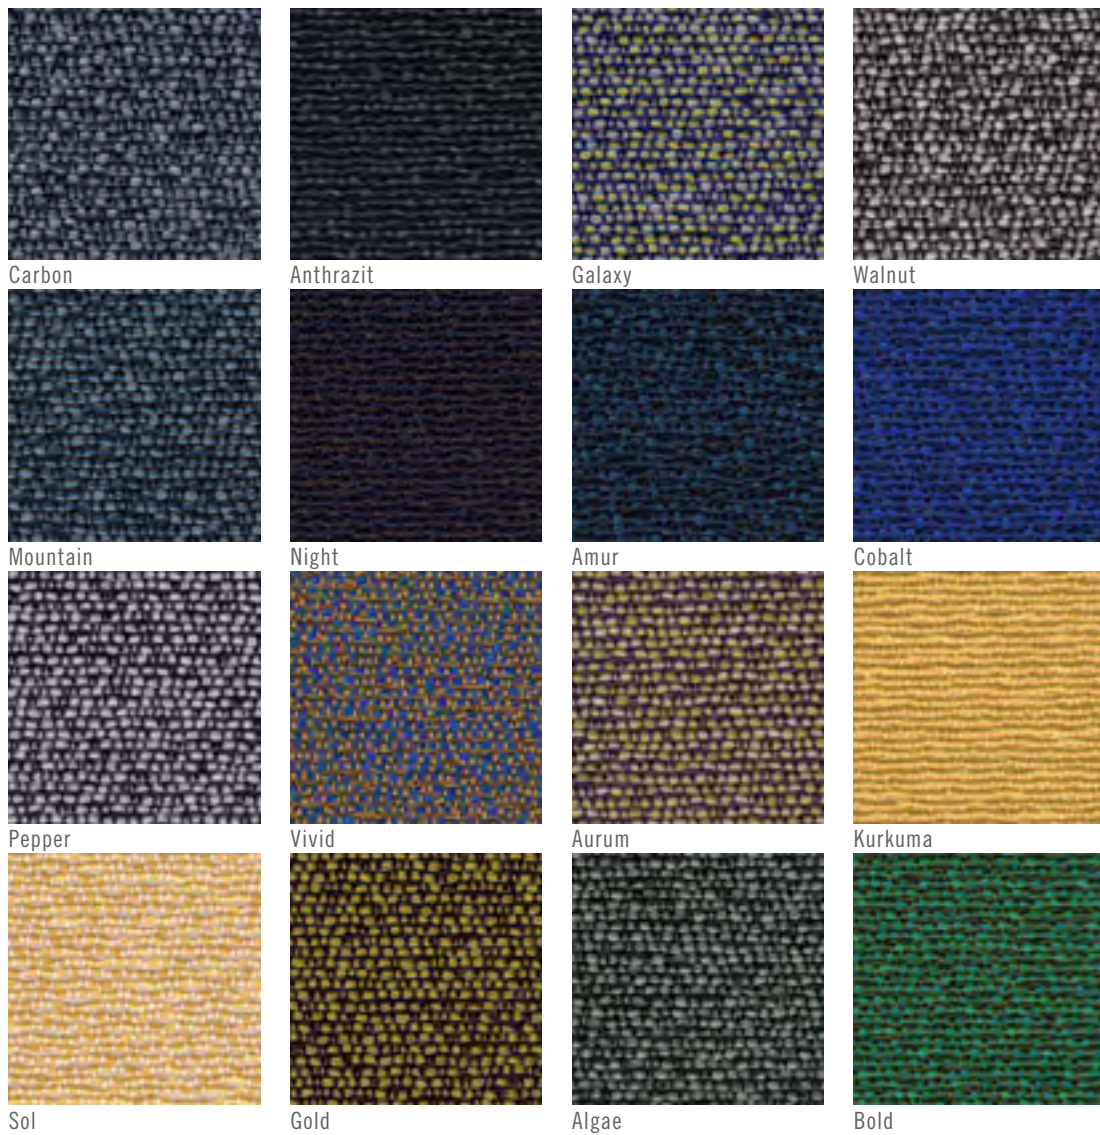


[Complete specifications at rohi.com](http://rohi.com)



Shake


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	660 g/ml
Martindale	≥70,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, ÖNORM B1/Q1 UNI 9175 1IM, BS 5852 Part 1:1979
Fabric care instruction	  


Category




[Complete specifications at rohi.com](http://rohi.com)




Ivy




Vulcan



Fero






Ray



Jade

Shake

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	660 g/ml
Martindale	≥70,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, ÖNORM B1/Q1 UNI 9175 1IM, BS 5852 Part 1:1979
Fabric care instruction	  

Category



[Complete specifications at rohi.com](http://rohi.com)

Fabric Category

E



Dhogar

(Mohair)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Cotton (back side) 30% Wool 28% Lyocell
Weight	620 g/ml
Martindale	≥45,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4, Wet ≥3
Pilling	≥4/5
Flame resistance	BS 5852-1:1979
Fabric care instruction	

Category





16




18



15



27

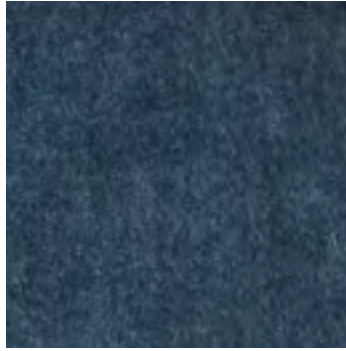

22




30



12



19

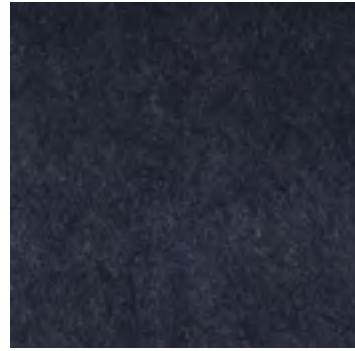

23

Dhogar (Mohair)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Cotton (back side) 30% Wool 28% Lyocell
Weight	620 g/ml
Martindale	≥45,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4, Wet ≥3
Pilling	≥4/5
Flame resistance	BS 5852-1:1979
Fabric care instruction	


Category





Divina 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 11M
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)



Divina 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 IIM
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)



Divina 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	


Category



[Complete specifications at kvadrat.dk](http://kvatrat.dk)



0886



0893



0922



0936



0944



0956








0966



0984

Divina 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)



Divina MD

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 11M
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvatrat.dk)



0733




0743



0753




0773




0783




0813




0843




0873



0913



0943



0973

Divina MD

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)



Divina Melange 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 11M
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvatrat.dk)



Divina Melange 3


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 11M
Fabric care instruction	


[Complete specifications at kvadrat.dk](http://kvatrat.dk)

Category





0821




0871



0917



0937




0967



0977

Divina Melange 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)




Everest

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	75% Wool 15% Alpaca 10% Polyamid
Weight	525 g/m ²
Martindale	130,000
Light fastness	4/5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	3/4
Flame resistance	UNI 9175 Class 1IM, CAL-TB 117:2013 BS 5852 Part 0-1(C&M), EN 1021-1&2
Fabric care instruction	

Category







808/1




808/2



806








812



605

Everest

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	75% Wool 15% Alpaca 10% Polyamid
Weight	525 g/m ²
Martindale	130,000
Light fastness	4/5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	3/4
Flame resistance	UNI 9175 Class 1IM, CAL-TB 117:2013 BS 5852 Part 0-1(C&M), EN 1021-1&2
Fabric care instruction	    

Category





Harald 3

(Velvet)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Cotton
Weight	520 g/ml
Martindale	100,000
Light fastness	4-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	4-5
Flame resistance	AS/NZS 1530.3, AS/NZS 3837 class 1 EN 1021-1, CAL-TB 117:2013
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)



Harald 3

(Velvet)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Cotton
Weight	520 g/ml
Martindale	100,000
Light fastness	4-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	4-5
Flame resistance	AS/NZS 1530.3, AS/NZS 3837 class 1 EN 1021-1, CAL-TB 117:2013
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)



Vidar 4

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% New Wool 6% Nylon
Weight	770 g/ml
Martindale	100,000
Light fastness	5-7
Fastness to rubbing	Dry 3-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, UNI 9175 1IM, NF D 60 013
Fabric care instruction	

[Complete specifications at kvadrat.dk](http://kvdadrat.dk)

Category





Vidar 4


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% New Wool 6% Nylon
Weight	770 g/ml
Martindale	100,000
Light fastness	5-7
Fastness to rubbing	Dry 3-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, UNI 9175 1IM, NF D 60 013
Fabric care instruction	

[Complete specifications at kvadrat.dk](http://kvatrat.dk)

Category







0872




0913



0932




0943




0956




0972



1062








1511



1880

Vidar 4

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% New Wool 6% Nylon
Weight	770 g/ml
Martindale	100,000
Light fastness	5-7
Fastness to rubbing	Dry 3-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, UNI 9175 1IM, NF D 60 013
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)


Fabric Category

F



Comfort+

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	

Category




[Complete specifications at gabriel.dk](http://gabriel.dk)



Comfort+

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	

Category




[Complete specifications at gabriel.dk](http://gabriel.dk)



Comfort+

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	

Category




[Complete specifications at gabriel.dk](http://gabriel.dk)



Comfort+

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	

Category




[Complete specifications at gabriel.dk](http://gabriel.dk)




8397



68010



68003



68008



1049




68001



68011




68000




62005



62003



62004








68007



0018

Comfort+


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	    


[Complete specifications at gabriel.dk](http://gabriel.dk)

Category




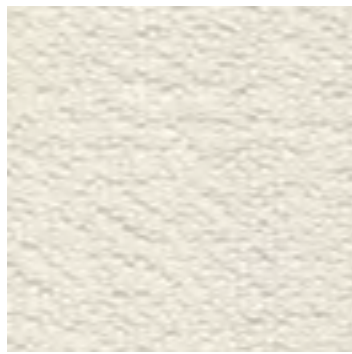


0100

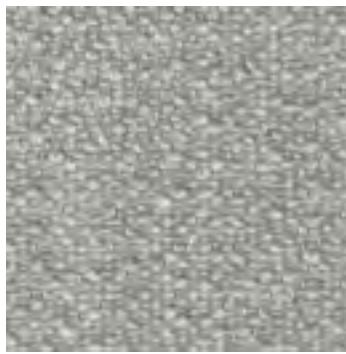

0130

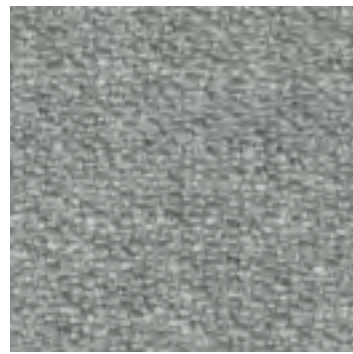

0150

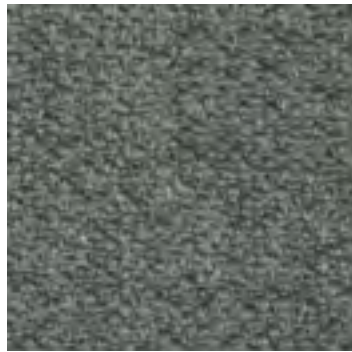

0170



0180



0200



0210



0240



0270

Ecriture

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	40% Polyacrylic 27% Polyester 9% Linen 18% Viscose 6% Cotton
Weight	1035 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-4
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	

Category




[Complete specifications at kvadrat.dk](http://kadrat.dk)




0380



0410

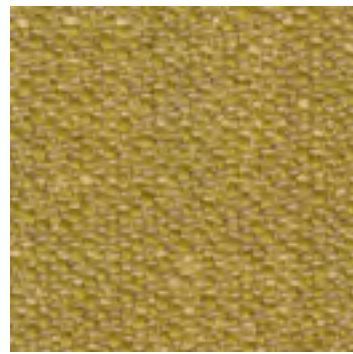


0470

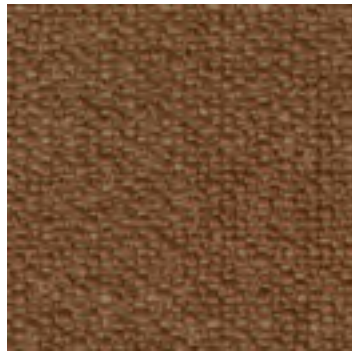


0570



0580

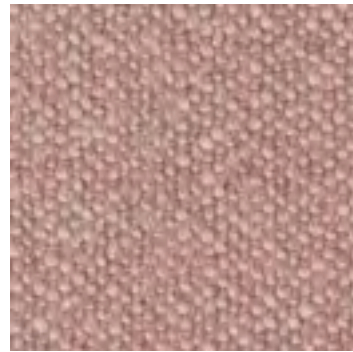

0640

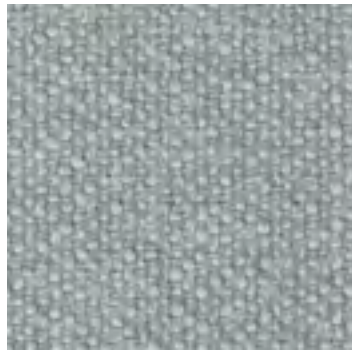

0710




0760



0780

Ecriture

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	40% Polyacrylic 27% Polyester 9% Linen 18% Viscose 6% Cotton
Weight	1035 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-4
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	

[Complete specifications at kvadrat.dk](http://kadrat.dk)

Category






0910



0970

Ecriture


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	40% Polyacrylic 27% Polyester 9% Linen 18% Viscose 6% Cotton
Weight	1035 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-4
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)

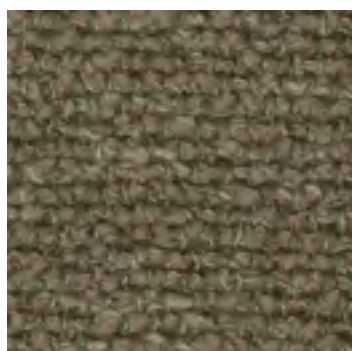

0001




0002




0003




0004

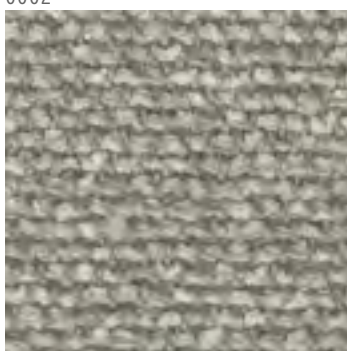


0005

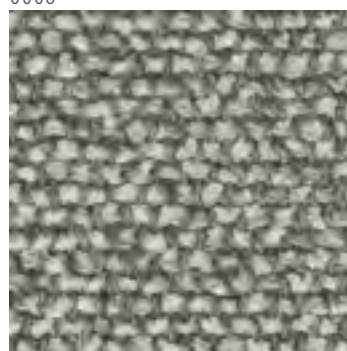


0006

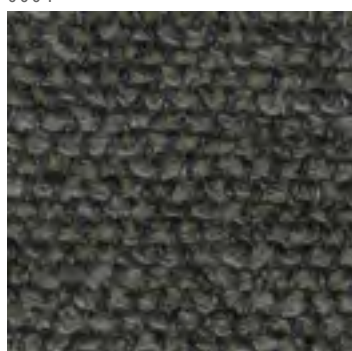

0007

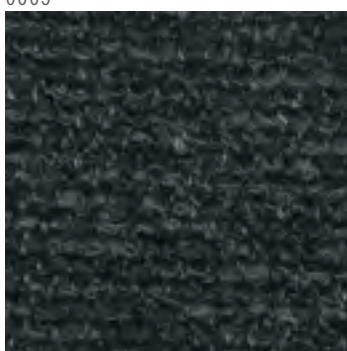

0008

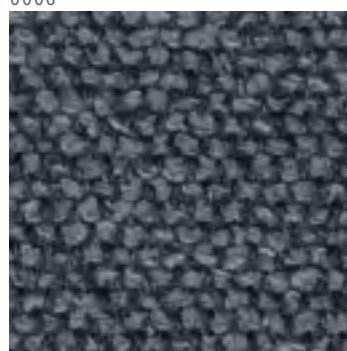

0009


Moss

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	52% Cotton 14% Acrylic 6% Linen 3% Nylon 3% Polyester 2% Viscose
Weight	1030 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	

Category


[Complete specifications at kvadrat.dk](http://kvadrat.dk)

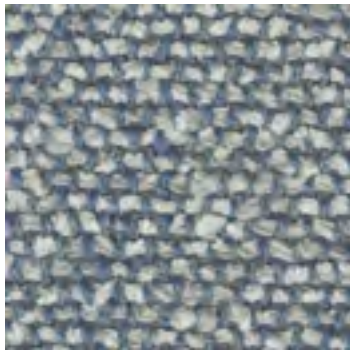

0010



0011

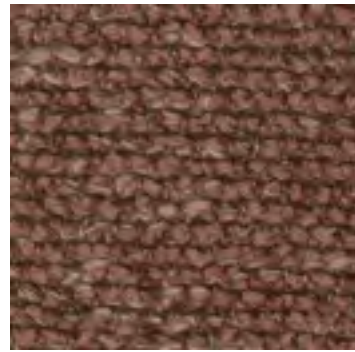

0012



0013



0014



0015



0016



0017



0018

Moss

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	52% Cotton 14% Acrylic 6% Linen 3% Nylon 3% Polyester 2% Viscose
Weight	1030 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	

[Complete specifications at kvadrat.dk](http://kvadrat.dk)

Category






0019



0020

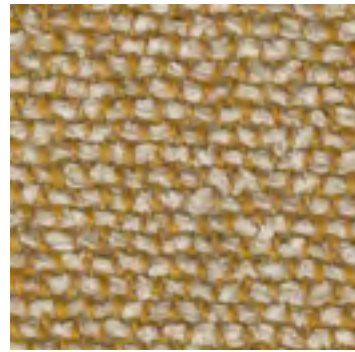

0021



0022

Moss


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	52% Cotton 14% Acrylic 6% Linen 3% Nylon 3% Polyester 2% Viscose
Weight	1030 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	

Category




[Complete specifications at kvadrat.dk](http://kvadrat.dk)

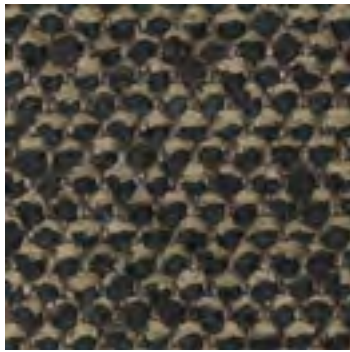


0001



0002

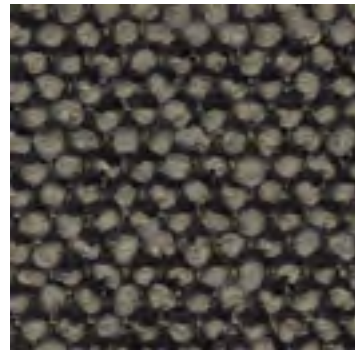


0003

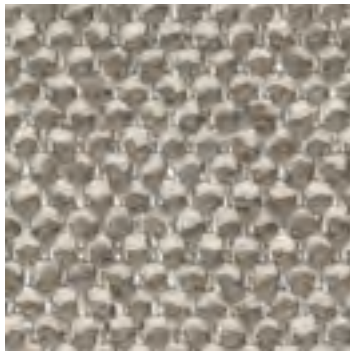

0004




0005

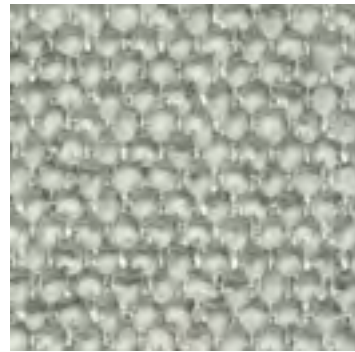


0006



0007

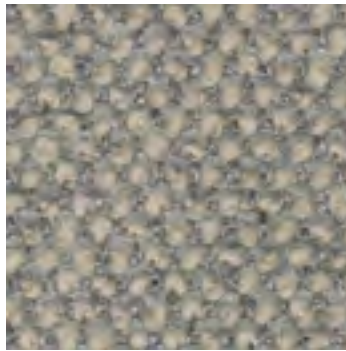

0008

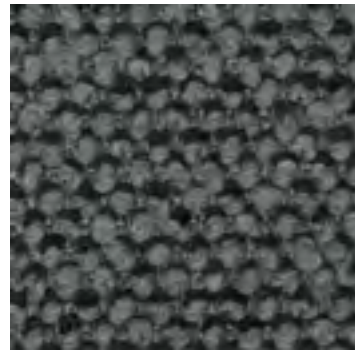

0009

Safire

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	43% Viscose 17% Polyacrylic 15% Wool 9% Cotton 8% Linen 8% Polyester
Weight	1010 g/ml
Martindale	40,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	


[Complete specifications at kvadrat.dk](http://kvadrat.dk)

Category







0010

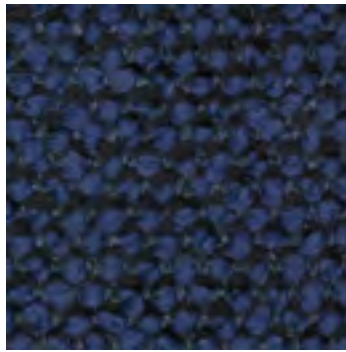

0011

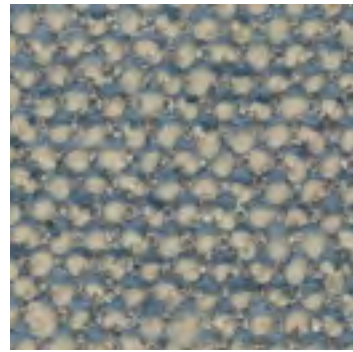

0012

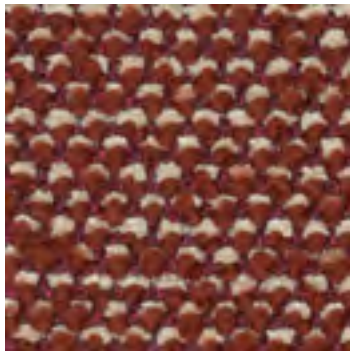


0013




0014



0015

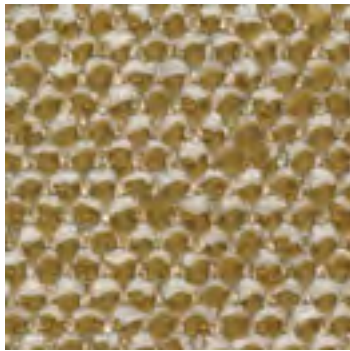

0016

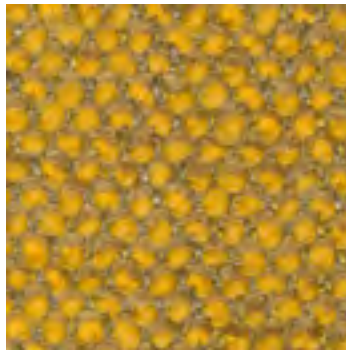

0017

Safire


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	43% Viscose 17% Polyacrylic 15% Wool 9% Cotton 8% Linen 8% Polyester
Weight	1010 g/ml
Martindale	40,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	


Category




[Complete specifications at kvadrat.dk](http://kvadrat.dk)

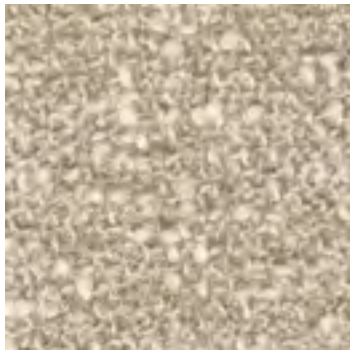

0001

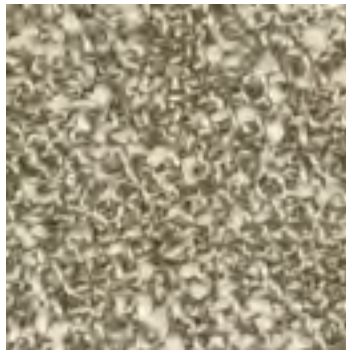

0002

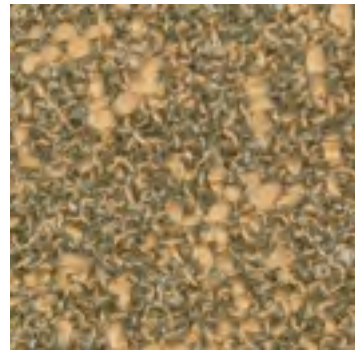

0003




0004




0005




0006

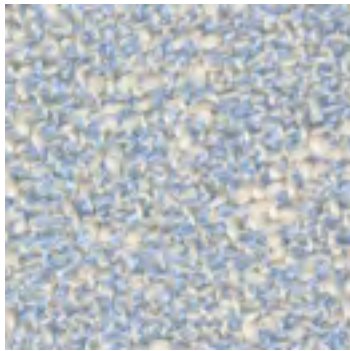

0007

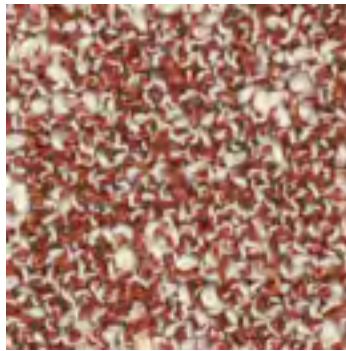


0008

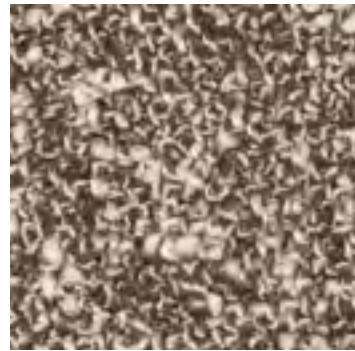

0009

Zero


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	65% Cotton 20% Polyacrylic 15% Polyester
Weight	740 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	5
Flame resistance	BS 5852 Part 1, Crib 5 with treatment CAL-TB 117:2013, EN 1021-1
Fabric care instruction	


[Complete specifications at kvadrat.dk](http://kvatrat.dk)

Category




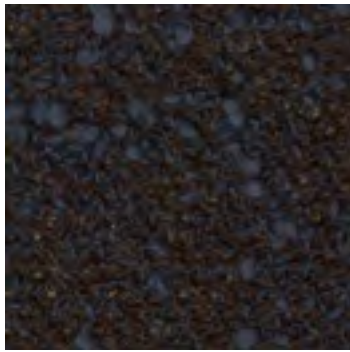

0010

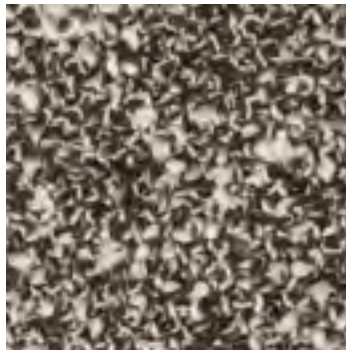

0011

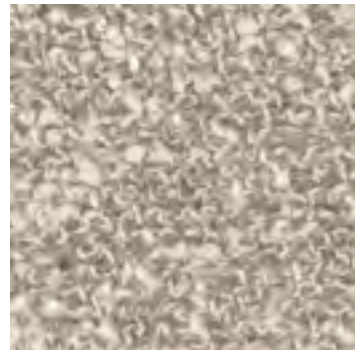


0012




0013



0014

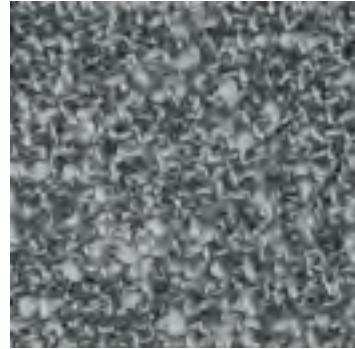

0015

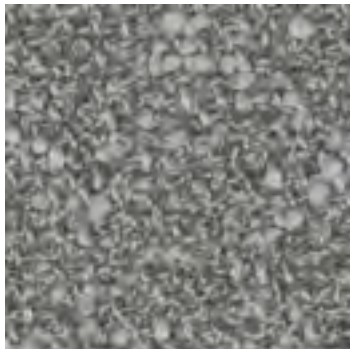

0016

Zero


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	65% Cotton 20% Polyacrylic 15% Polyester
Weight	740 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	5
Flame resistance	BS 5852 Part 1, Crib 5 with treatment CAL-TB 117:2013, EN 1021-1
Fabric care instruction	


[Complete specifications at kvadrat.dk](http://kvadrat.dk)

Category




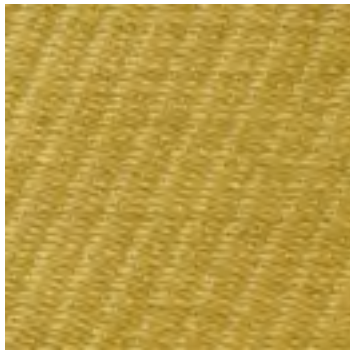

0001

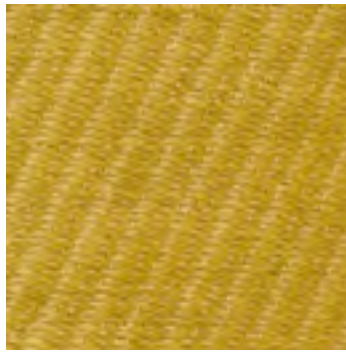


0002

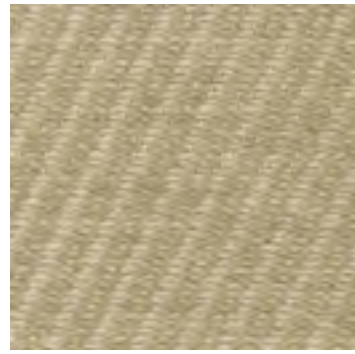


0003




0004

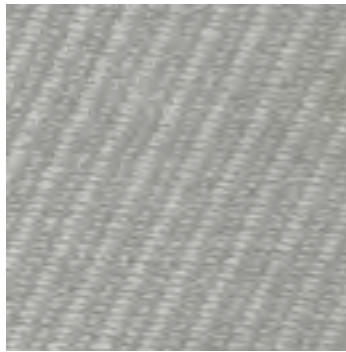


0005

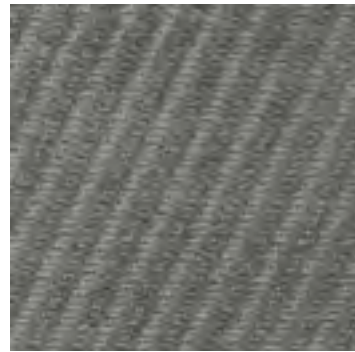


0006

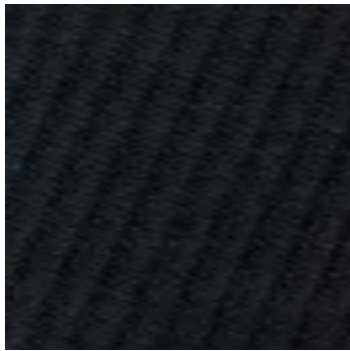

0007

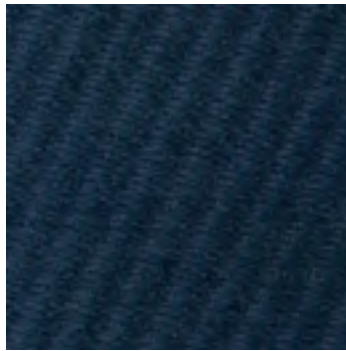

0008

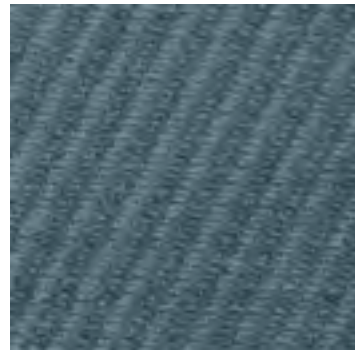

0009

Nabis


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	48% Cotton 30% Viscose 22% polyester
Weight	890 g/ml
Martindale	40,000
Light fastness	6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	5
Flame resistance	BS 5852 Crib 5 with treatment, EN 1021-1/2 CAL-TB 117:2013 with CAL.117 compliant interliner IMO FTP Code 2010 Part 8
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)

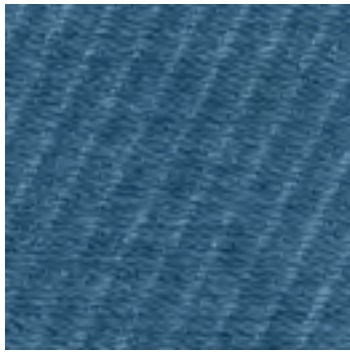


0010



0011



0012

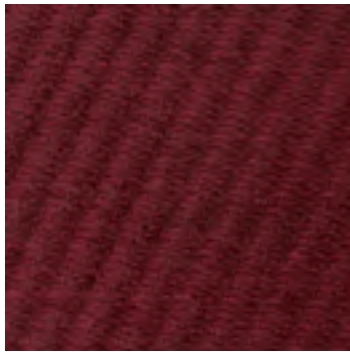

0013




0014




0015



0016

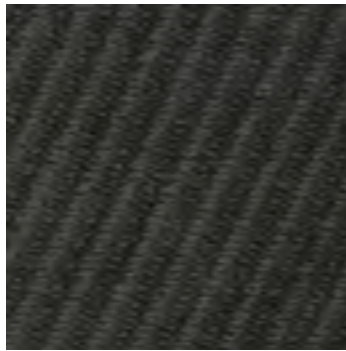

0017

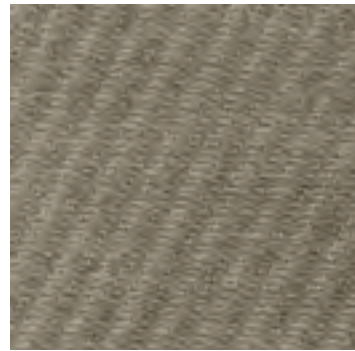

0018

Nabis

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	48% Cotton 30% Viscose 22% polyester
Weight	890 g/ml
Martindale	40,000
Light fastness	6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	5
Flame resistance	BS 5852 Crib 5 with treatment, EN 1021-1/2 CAL-TB 117:2013 with CAL.117 compliant interliner IMO FTP Code 2010 Part 8
Fabric care instruction	


[Complete specifications at kvadrat.dk](http://kvadrat.dk)

Category







0019

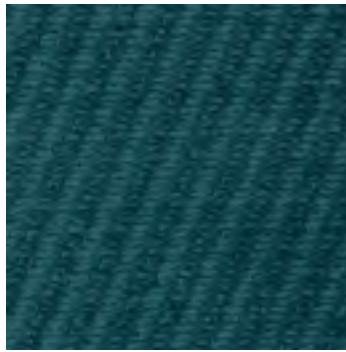


0020

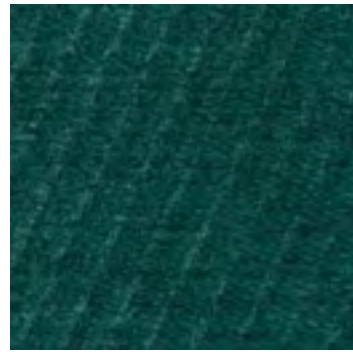

0021

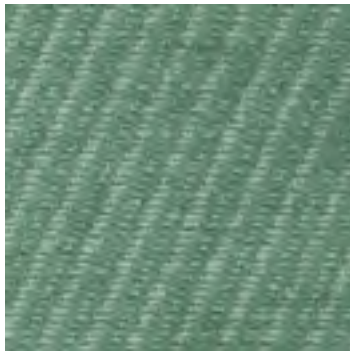



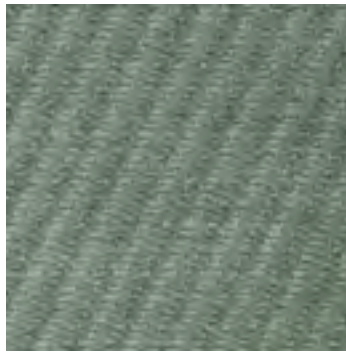


0022



0023

Nabis

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	48% Cotton 30% Viscose 22% polyester
Weight	890 g/ml
Martindale	40,000
Light fastness	6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	5
Flame resistance	BS 5852 Crib 5 with treatment, EN 1021-1/2 CAL-TB 117:2013 with CAL.117 compliant interliner IMO FTP Code 2010 Part 8
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](http://kvatrat.dk)




0111



0121




0131

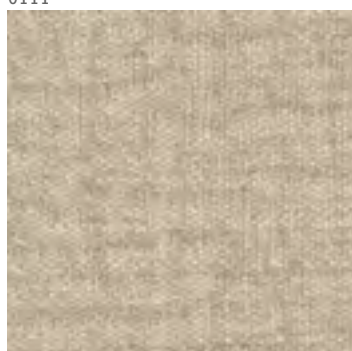

0221




0231

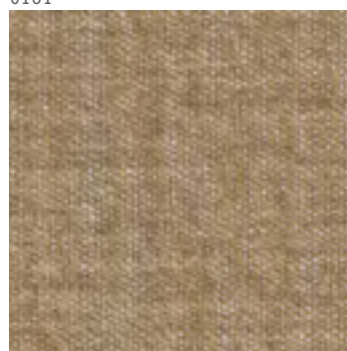

0241



0381

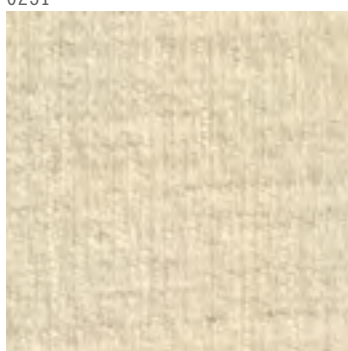

0401



0451

Cifrado

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Recycled Polyester 27% Viscose 24% Recycled Cotton 7% Linen
Weight	1100 g/ml
Martindale	30,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	5
Flame resistance	BS 5852 part 1 ignition source 0, EN 1021-1/2 CAL-TB 117:2013, AS/NZS 3837 Class 2
Fabric care instruction	

[Complete specifications at kvadrat.dk](http://kvatrat.dk)

Category





0611




0671



0741



0771

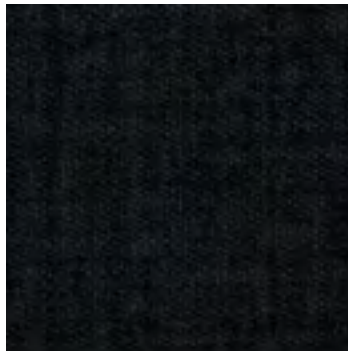

0791



0901

Cifrado

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Recycled Polyester 27% Viscose 24% Recycled Cotton 7% Linen
Weight	1100 g/ml
Martindale	30,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	5
Flame resistance	BS 5852 part 1 ignition source 0, EN 1021-1/2 CAL-TB 117:2013, AS/NZS 3837 Class 2
Fabric care instruction	

[Complete specifications at kvadrat.dk](http://kvadrat.dk)

Category



Leather Care

BENSEN works with a selection of beautiful open-grain, full aniline and semi-aniline dyed leathers from Sweden (Elmo Leather) and Italy (Acquario). These are characterized by a buttery soft hand which feels natural and unpainted, as well as by the depth of colour achieved in the through-dyeing process. The leathers are put through a gentle correcting process to help normalize the surface, although discrete insect bites, small scars, and graining variations can be visible which adds to the character and subtle patina of the material. All leather material used comes from cows reared on ethically managed free-range farms in Sweden and Brazil specifically intended for leather production, rather than milk and meat production.

Leather is a living material that matures beautifully if treated properly. You should therefore consider the following:

- Never place leather furniture closer than 20-30cm to a radiator or in direct sunlight.
- Vacuum clean leather often with a soft brush and, when necessary, clean any exposed surfaces, such as armrests and headrests. For stains that are water-soluble, dampen the area and dry using a paper towel.
- If you should get a stain that cannot be removed, never experiment with strong solvents or chemicals. The problem could get worse, needing to be repaired. Instead, seek advice from a professional upholstery cleaning service.
- Water-based leather cleaning and protective products are available at specialty stores which can improve the longevity of leather. Always avoid using solvent based products for cleaning leather.

Shearling (Sheepskin) Care

With appropriate maintenance and cleaning, a sheepskin product can remain for a lifetime. Refer to the following instructions for care and maintenance:

- Avoid prolonged to direct sunlight.
- Regularly vacuum and air clean the sheepskin.
- Address stains promptly by soaking spots with water then utilize a dry cloth to apply pressure and remove any excess moisture.
- When cleaning, use a sponge, lukewarm water, and mild wool detergent.

Fabric Care

BENSEN offers a beautiful collection of different fabrics, each available in numerous colourways and luxuriously soft to touch. These are sourced directly from some of the best and oldest fabric producers in Italy and Denmark. Our fabrics are produced almost exclusively with natural fibres (Cotton, Viscose, and Wool in various proportions), that are yarn-dyed before weaving to achieve the most consistent and vivid colours.




The most common method of cleaning is Dry Cleaning. Dry Cleaning should be done at the lowest possible temperature. The dry clean process can apply any mild solvent except trichloroethylene and should not involve any oxidizing agents. After washing, use an iron on the lowest possible setting to remove any wrinkles, or a clothing steamer once the covers are fitted.

Note: It is advised to apply lengths of Velcro strip to the Velcro tabs before Dry Cleaning to avoid the possibility of the Velcro sticking to the fabric during cleaning or drying and subsequently damaging it.




For more involved cleaning, we recommend using a professional upholstery cleaning service only. They generally come on site, clean the covers while still on the sofa using a steam cleaner and specialized detergents, and guarantee the work they do.

Fabric Care Symbol Guide




Washing

-  Do Not Wash
-  Hand Wash
-  Machine Wash, Cold







Ironing

-  Do not iron
-  Ironing, Low temp
-  Ironing, Medium temp


Bleaching

-  Do not bleach
-  Do not bleach
-  Non-Chlorine Bleach

Dry/Wet Cleaning

-  Do not dry clean
-  Dry Clean, Petroleum only, Delicate
-  Dry Clean, PCE only
-  Dry Clean, PCE only, Delicate
-  Wet Clean
-  Wet Clean, Delicate

Drying

-  Do not Spin
-  Do not tumble dry
-  Natural Drying, Dry Flat
-  Natural Drying, Drip Dry

**BEN
SEN**

[bensen.com](https://www.bensen.com)