

KOOL-IT

Signature

LX-14RB

SINGLE GLASS DOOR MERCHANDISER REFRIGERATOR

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.



Signature **40/80 Warranty**
40 months parts and labor
80 months on compressor (part only)

KEY FEATURES



• **Eco-Friendly Refrigerant**

Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA, California & Canada refrigerant & energy standards.



• **Intelligent Electronic Control**

Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



• **High Power Reliable Refrigeration System**

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



• **Standard LED Lighting System**

Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.



• **Newly Designed Condenser**

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



• **Spark-Free Refrigeration Components**

All Reach-In models have spark free refrigeration components for optimal safety, per UL requirements.



3560 NW 56th Street
Fort Lauderdale, FL, United States 33309
Telephone: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100


5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Telephone: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com / mvpgroupcorp.com



LX-14RB

SINGLE GLASS DOOR MERCHANDISER REFRIGERATOR

PRODUCT VIEWS

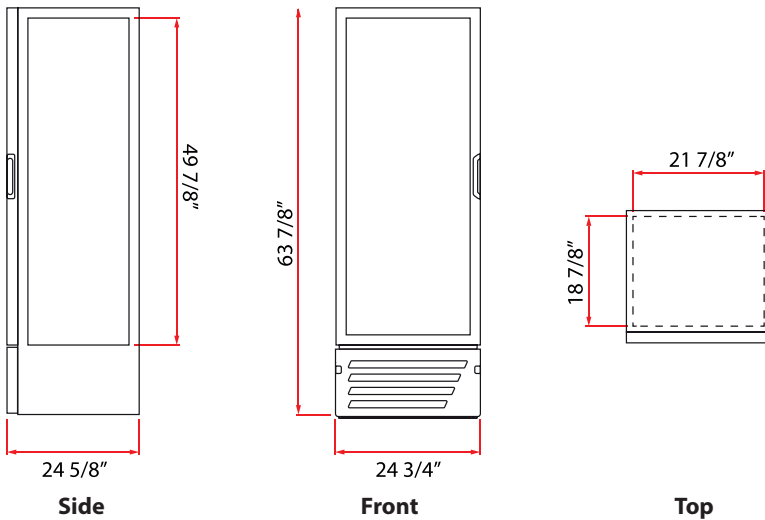

ADDITIONAL FEATURES



Manual Lock - External lock available



Gravity kit - Visi-Slide product display technology



Price Kit - Available for shelf display



Casters or legs are available options

TECHNICAL SPECIFICATIONS

Exterior Dimensions		Interior Dimensions	
W:	24 3/4" (63 cm)	W:	21 7/8" (56 cm)
D:	24 5/8" (63 cm)	D:	18 7/8" (48 cm)
H:	63 7/8" (162 cm)	H:	49 7/8" (127 cm)
Usable Interior Capacity		Usable Volume	
W:	19 7/8" (52 cm)	11.5 Cu Ft 325.6 L	
D:	16 3/4" (43 cm)		
H:	41 3/4" (106 cm)		
Doors	Material	Shelves	Shelf Size
1	V7 Plastic Frame	4	W: 20 7/8" (53 cm) D: 17 1/4" (44 cm)
Exterior Material		Pre-painted steel	
Interior Material		Pre-painted steel	

REFRIGERATION PERFORMANCE

Refrigerant	Energy Consumption
R290a / 1.9 oz (0.055 kg)	1.460 kWh/24h
Compressor Power	Condenser
1/5 HP	Finless (low maintenance)
Thermostat default setting	32°F (0°C) to 44.6°F (7°C)

ELECTRICAL

Power Supply	Amps	Lighting
115V/60Hz	4.1A	432 Lux Output 7 modules, 8 LED per
Plug Type	Controller	Cord Length
NEMA 5-15P	ETC1H	118" (300 cm)

LOGISTICS

Trailer Loads	Unit Weight	Shipping Dimensions	
53': 80	198.4 lb (90 kg)	W:	27 1/4" (69 cm)
	Shipping Weight	D:	25 1/8" (64 cm)
	211.6 lb (96 kg)	H:	67 1/8" (171 cm)