


## FITTING INSTRUCTIONS

### Dimensions

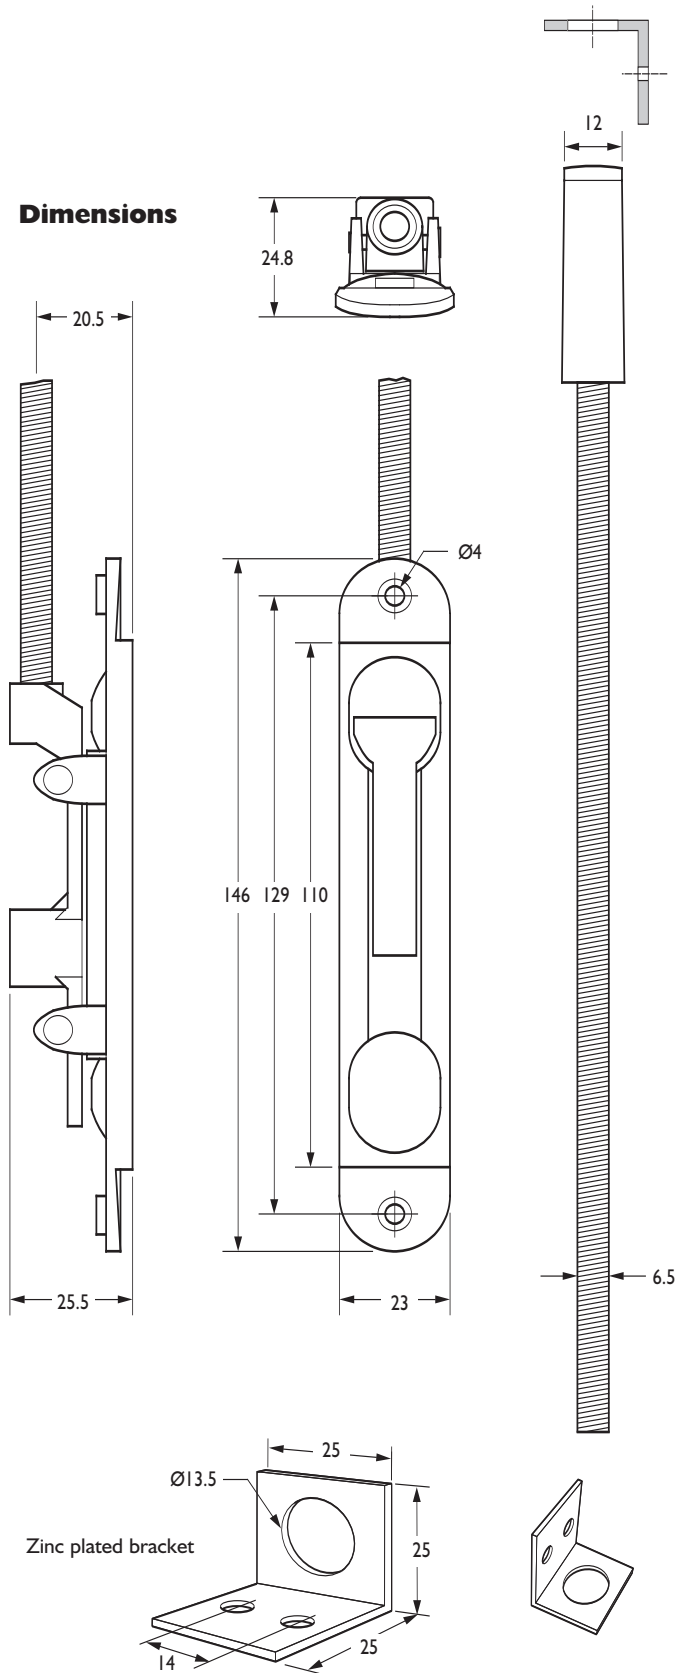


The SFA300S Flushbolt is suitable for use on aluminium and timber doors and used for securing the slave leaf of a pair of doors. Standard installation requires two flushbolts fixed at the top and bottom of the door.

### Specifications

**Dimensions:** 305mm x 23mm x 24.8mm.  
**Case:** Die-cast zinc alloy body mechanism.  
**Bolt:** Hardened Steel Bolt, Zinc-Plated, Anti-Rattle Sleeve.  
**Bolt Throw:** 18mm.  
**Rod:** 7mm Zinc-Plated Steel, fully threaded.  
**Finish:** Satin Chrome.  
**Bracket:** Zinc plated steel supplied with M6 fixings.

### Preparation

Holes drilled and countersunk for M5 fixings supplied.  
 Ø13mm hole required in frame for bolt.

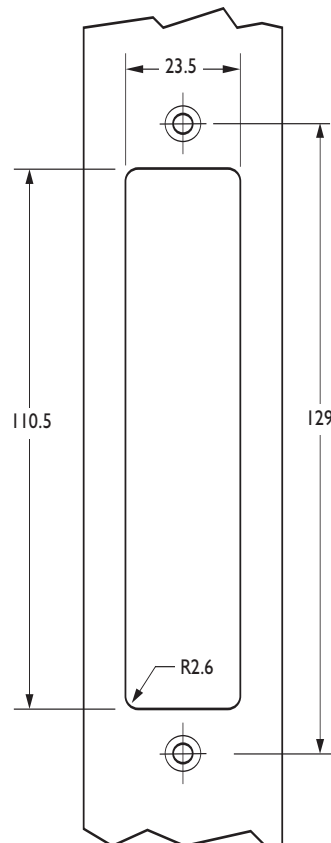

(All dimensions in mm)