

POCKET DOOR HENDERSON

60kg

Wood

Interior

Sliding door solution that works with cavity walls for doors up to 60kg

Overview

Pocket Door is a unique sliding door solution whereby the sliding door disappears into the cavity wall. The system offers amazing benefits for environments where space is limited such as bathrooms, en suites, kitchens, utility rooms, walk in wardrobes and disability access areas. Each Pocket Door kit comes with a pre-assembled aluminium track and header mechanism. For bi-parting doors, two kits can be used.

The system is available with an included dual soft close which catches the door in its final moments of travel and brings it gently into position - preventing slamming.

Features and Benefits

- Six kits available for various opening widths
- Each kit comes complete with the stud supports to create a cavity
- Available as standard or dual soft close kits
- Simultaneous option available (order code SIM100)
- Compatible locksets available in gold or satin (see accessories)
- Overall wall thickness with 12.5mm boards is 120mm



Product and Door Specification

Kit Order Code				Door Thickness Range	Max. Door Width	Max. Door Height
Standard Pocket Door (Doors weighing upto 60kg)	Pocket Door with Dual Soft Close (Doors weighing 10-20kg)	Pocket Door with Dual Soft Close (Doors weighing 20-40kg)	Pocket Door with Dual Soft Close (Doors weighing 40-60kg)			
PDK3	PDKSOFT3/20	PDKSOFT3/40	PDKSOFT3/60	28-44mm	762mm	1981mm
PDK4	PDKSOFT4/20	PDKSOFT4/40	PDKSOFT4/60	28-44mm	838mm	1981mm
PDK5	PDKSOFT5/20	PDKSOFT5/40	PDKSOFT5/60	28-44mm	762mm	2040mm
PDK6	PDKSOFT6/20	PDKSOFT6/40	PDKSOFT6/60	28-44mm	826mm	2040mm
PDK7	PDKSOFT7/20	PDKSOFT7/40	PDKSOFT7/60	28-44mm	726mm	2040mm
PDK10	PDKSOFT10/20	PDKSOFT10/40	PDKSOFT10/60	28-44mm	930mm	2315mm

Kit Contents

Aluminium Track (x1)	280M
Hangers (x2)	284
Galvanised Steel Wrapped Softwood Studs (x4)	-
Galvanised Steel Stud Spacing Brackets (x2)	-
Galvanised Steel Stud Support Brackets (x2)	-
Softwood Header Assembly (with pre-fitted track) (x1)	-
Clip Stop with Adjustable Retention (x2)	601H
Rubber Buffer (x1)	287
Flush Pulls (x2)	385SA
Guide (x1)	PD/WRAP






Accessories

Simultaneous Action Kit	For two bi parting doors (2 pocket door kits required)	SIM100	
Lockset	For 35-52mm thick doors (satin)	390/S	
	For 35-52mm thick doors (chrome)	390/C	
Door Edge Pull	Finger pulley in satin	EDGE/S	
	Finger pulley in chrome	EDGE/C	

Watch the Installation Video

Visit www.pchenderson.com/pocket-door-installation or scan the QR code using your phone



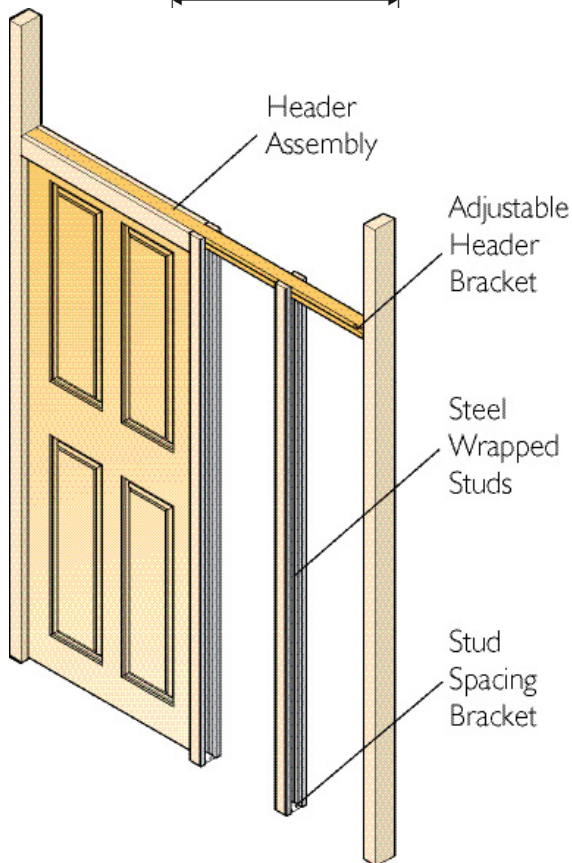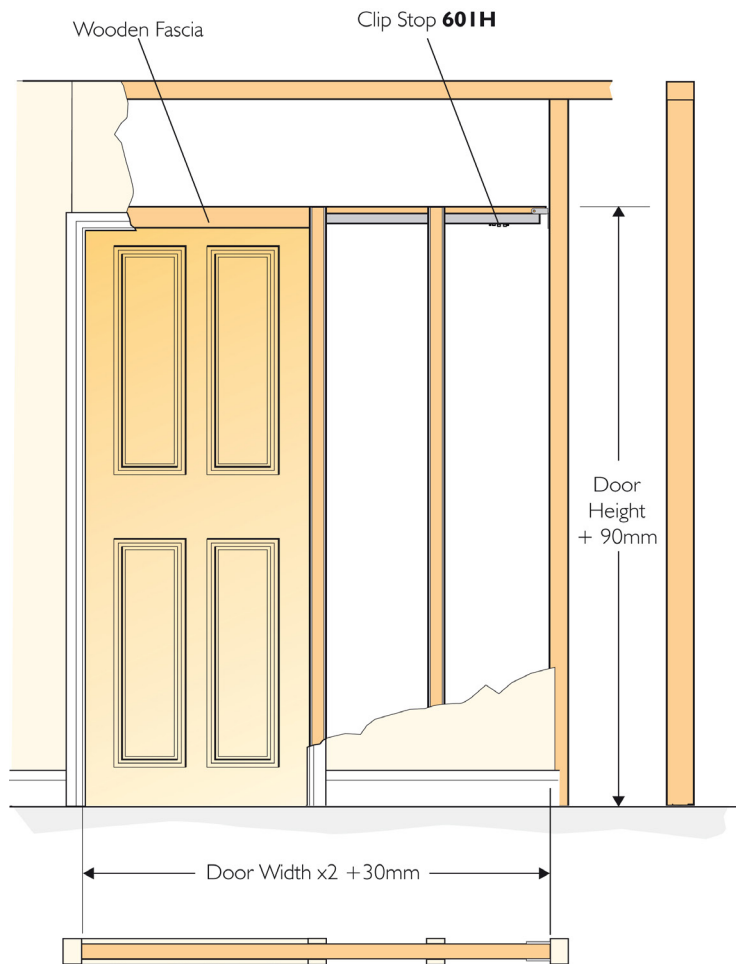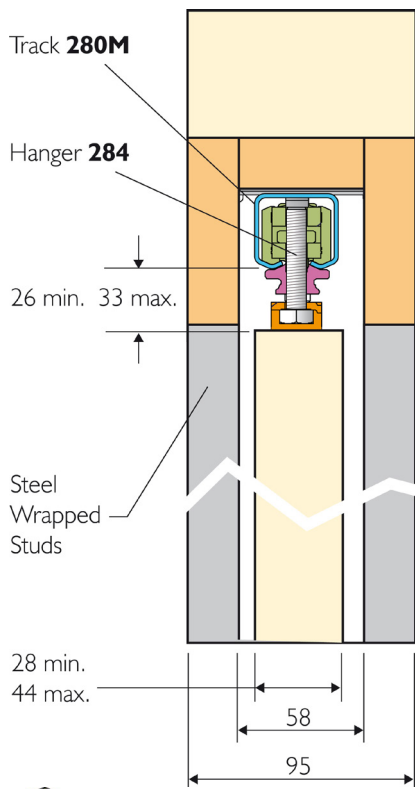

Opening Size Guide			
Kit	Standard Door Size	Rough Opening Width	Rough Opening Height
PDK3	762mm (w) x up to 1981mm (h)	1554mm	2071mm
PDK4	838mm (w) x up to 1981mm (h)	1706mm	2071mm
PDK5	762mm (w) x up to 2040mm (h)	1554mm	2130mm
PDK6	826mm (w) x up to 2040mm (h)	1682mm	2130mm
PDK7	726mm (w) x up to 2040mm (h)	1482mm	2130mm
PDK10	930mm (w) x up to 2315mm (h)	1890mm	2405mm

Finished Wall Thickness Calculation

120mm Finished Wall Thickness

95mm cavity + 12.5mm plasterboard either side = 120mm finished wall thickness

For further information, please contact us on:

UK Sales

T: **+44 (0) 191 377 7345**

E: **sales@pchenderson.com**

W: **www.pchenderson.com**

Export Sales

T: **+44 (0) 191 377 7346**

E: **international@pchenderson.com**

W: **export.pchenderson.com**