

SFBA 2/2

Double Foil
Double Bubble

WATER &
VAPOUR RESISTANT


PURE ALUMINIUM
FACING

IDEAL FOR NEW BUILD
OR RETROFIT

ROOF
R 1.04

WALL
R 1.47

FLOOR
R 2.79

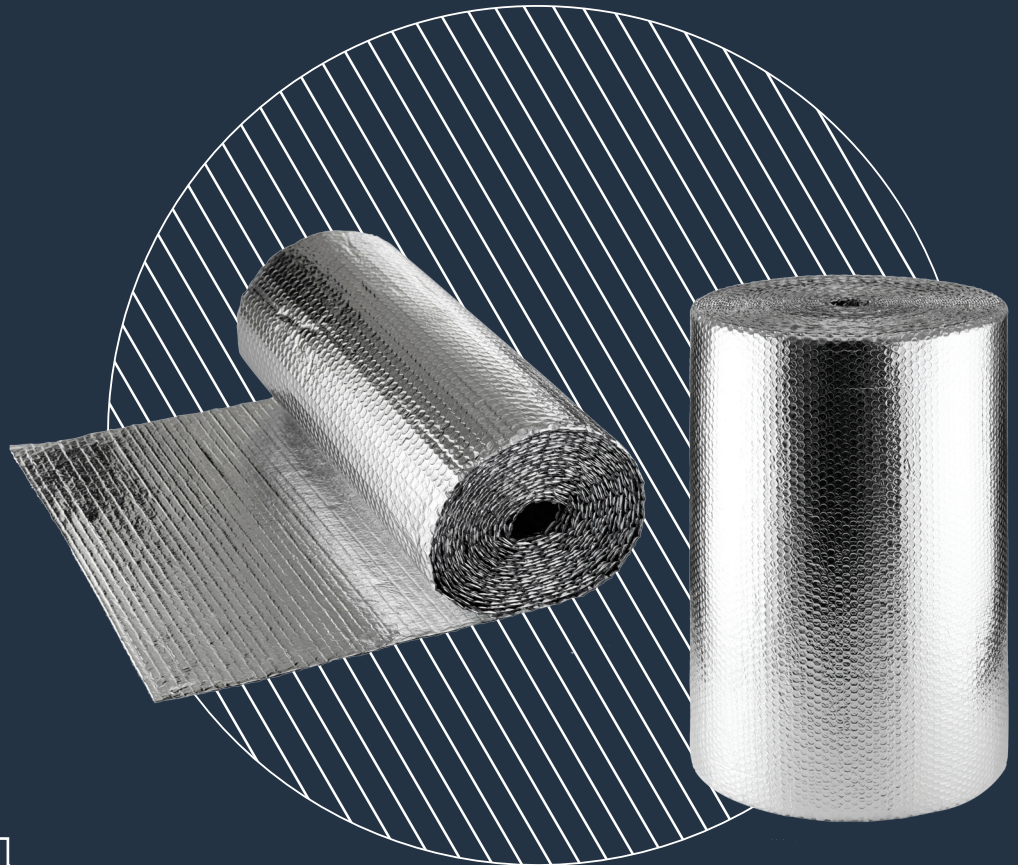

USAGE



Super**FOIL**.co.uk

QUALITY SYSTEM
MANUFACTURED TO:
ISO 9001:2008

Thermal Insulation for use in Roof, Walls & Floors

KEY FEATURES

- SFBA 2/2 is waterproof and resists the passage of moisture through walls, floors and ceilings.
- SFBA is part of the SuperFOIL range, designed to maximise insulation performance with a quick and easy installation.
- SFBA 2/2 is a multi-layer air bubble insulation with external layers of pure aluminium foil. This provides a corrosion resistance for increased lifespan.
- SFBA is a leading bubble foil insulation. It can be used for insulating under floor, in walls, in dry lining such as for cellars and can also be used in greenhouses and other industrial applications.
- SFBA is a high performance insulation that utilises low emissivity air gaps to maximise the thermal performance.
- SFBA reflects heat, just like a mirror reflects light. SFBA is an ideal radiant barrier for supplementing existing insulation to keep your house warmer in winter and cooler in summer.



TECHNICAL

| PRODUCT DIMENSIONS | |
|--------------------|-------|
| Thickness | 6mm |
| Length | 25m |
| Width | 1.2m |
| Coverage | 30sqm |
| Weight | 7.5kg |

| THERMAL PERFORMANCE | |
|-------------------------|--------------|
| Core | 0.14 |
| Roof (inc. air spaces) | 1.04 R Value |
| Wall (inc. air spaces) | 1.47 R Value |
| Floor (inc. air spaces) | 2.79 R Value |
| Emittance | 0.05 |

| FIRE PERFORMANCE | |
|------------------------------|----------------------------------|
| Reaction to Fire (Euroclass) | Class E (behind plasterboard) |

