

m o o o i

Perch Light Wall

UMUT YAMAC



Made of folded paper and brass, the Perch evokes a feeling of freedom. Let the graceful bird swing and glow with joy. Just beware that it might just spread its wings and fly away...

Detailing




This sunlit bird is free to swing when softly touched. It gently glows and brings along the promise of spring.

Colours

Brass and white

Perch Light Wall / Large non-dimmable

Dimensions

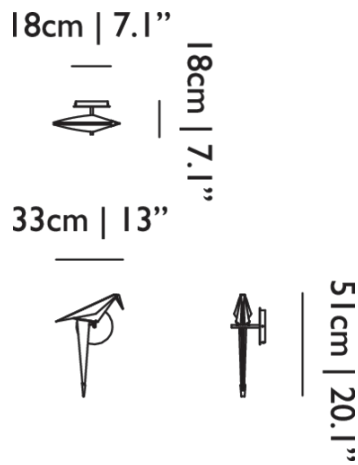

Product

WIDTH 33cm | 13"
HEIGHT 51cm | 20.1"
DEPTH 18cm | 7.1"
WEIGHT NETTO 3kg | 6.61lbs

Packaging

WIDTH 34cm | 13.4"
HEIGHT 21cm | 8.3"
CUBAGE 0.06m³ | 2.09ft³
LENGTH 83cm | 32.7"
WEIGHT 2.5kg | 5.51lbs

Technical CE

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

DIMMABLE

No

LIFETIME

50000 hours

CABLE LENGTH

260cm | 102.4"

CRI

80

LIGHT OUTPUT

150 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

90-264

MAX POWER CONSUMPTION

5W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Black

COLOUR TEMPERATUE

3000 K

LIGHT DIRECTION

All directions

Technical cULus

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

DIMMABLE

No

LIFETIME

50000 hours

CRI

80

LIGHT OUTPUT

150 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

100-240

MAX POWER CONSUMPTION

5W

LAMPHOLDER

LED (Solid state)

COLOUR TEMPERATURE

3000 K

LIGHT DIRECTION

All directions

Perch Light Wall / Recessed Large dimmable 1-10V

Dimensions

8cm | 2.8"



15cm | 5.9"

33cm | 13"



51cm | 20.1"

Product

WIDTH 33cm | 13"**HEIGHT** 51cm | 20.1"**DEPTH** 15cm | 5.9"**WEIGHT NETTO** 2kg | 4.4lbs

Packaging

WIDTH 34cm | 13.4"**HEIGHT** 15cm | 5.9"**CUBAGE** 0.04m³ | 1.26ft³**LENGTH** 70cm | 27.6"**WEIGHT** 2kg | 4.4lbs

Technical CE

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B


INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE	LED	LIGHTSOURCE INCLUDED	Yes
NUMBER OF LIGHTSOURCES	1	INPUT VOLTAGE	180-240
FREQUENCY	50/60	MAX POWER CONSUMPTION	5W
DIMMABLE	Yes	LAMPHOLDER	LED (Solid state)
LIFETIME	50000 hours	COLOUR TEMPERATUE	3000 K
CRI	80	LIGHT DIRECTION	All directions
LIGHT OUTPUT	150 lm		

Perch Light Wall / Recessed Small dimmable 1-10V

Dimensions

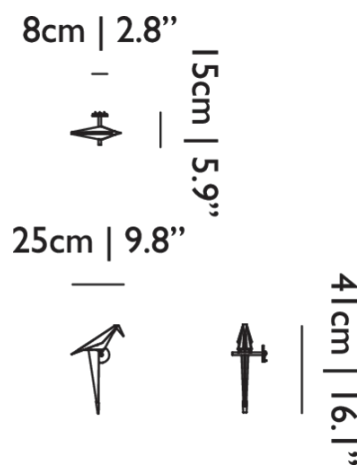

Product

WIDTH	25cm 9.8"
HEIGHT	41cm 16.1"
DEPTH	15cm 5.9"
WEIGHT NETTO	2kg 4.4lbs

Packaging

WIDTH	34cm 13.4"
HEIGHT	15cm 5.9"
CUBAGE	0.04m ³ 1.26ft ³
LENGTH	70cm 27.6"
WEIGHT	2kg 4.4lbs

Technical CE

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

180-240

FREQUENCY

50/60

DIMMABLE

Yes

LIFETIME

50000 hours

CRI

80

LIGHT OUTPUT

150 lm

MAX POWER CONSUMPTION

5W

LAMPHOLDER

LED (Solid state)

COLOUR TEMPERATURE


3000 K

LIGHT DIRECTION

All directions

Perch Light Wall / Small non-dimmable

Dimensions

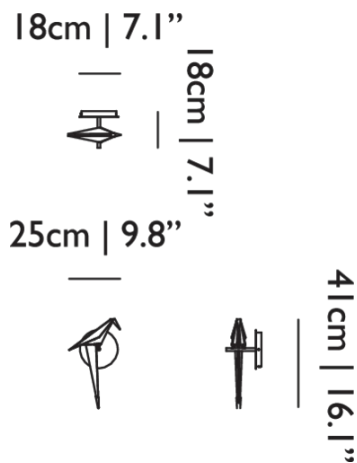

Product

WIDTH 25cm | 9.8"**HEIGHT** 41cm | 16.1"**DEPTH** 18cm | 7.1"**WEIGHT NETTO** 3kg | 6.61lbs

Packaging

WIDTH 34cm | 13.4"**HEIGHT** 21cm | 8.3"**CUBAGE** 0.06m³ | 2.09ft³**LENGTH** 83cm | 32.7"**WEIGHT** 2.5kg | 5.51lbs

Technical CE

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

DIMMABLE

No

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

90-264

MAX POWER CONSUMPTION

5W

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE LENGTH

260cm | 102.4"

CRI

80

LIGHT OUTPUT

90 lm

CABLE COLOUR

Black

COLOUR TEMPERATURE

3000 K

LIGHT DIRECTION

All directions

*Technical cULus***MATERIAL**

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

DIMMABLE

No

LIFETIME

50000 hours

CRI

80

LIGHT OUTPUT

90 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

100-240

MAX POWER CONSUMPTION

5W

LAMPHOLDER

LED (Solid state)

COLOUR TEMPERATURE

3000 K

LIGHT DIRECTION

All directions