

# Tolomeo micro LED wall w/ S bracket aluminum

## SPECIFICATIONS

TOL1141



### Design By

Michele De Lucchi  
Giancarlo Fassina

### Collection

Design



### Specifications

Delivered lumens	231lm
Light output ratio	39lm/W
Power consumption	6W
Led type	5W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	Dimmable (On Cord)
Input Voltage	120-240V
Driver	Plug-In

### Colors & Finishes

Aluminum

\*Integrated light source


### Materials

- Arms and diffuser in aluminum
- Joints and tension control knobs in polished die-cast aluminum
- Tension cables in stainless steel
- S-Bracket in polished die-cast aluminum

### Features & Accessories

- Fully adjustable, articulated arm structure
- Tilttable and rotatable diffuser (90 degrees in both directions)

### Dimensions

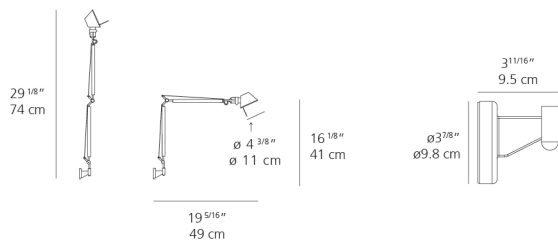

### Packaging


2 Boxes

1 x 8-3/8" x 8-3/8" x 20-3/16" / 2.28 lbs - 21 cm x 21 cm x 51 cm / 1.036 kg

1 x 4-7/16" x 4-7/16" x 4-7/16" / .55 lbs - 11 cm x 11 cm x 11 cm / .25 kg

### Light distribution

Direct/Indirect



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane

### Luminaire weight

1.47 lbs / .67 kg

### Warranty

5 year limited warranty