

# Tolomeo mini LED wall w/ S bracket aluminum

## SPECIFICATIONS

TOL1124



### Design By

Michele De Lucchi  
Giancarlo Fassina

### Collection

Design



### Specifications

|                                    |                    |
|------------------------------------|--------------------|
| Delivered lumens                   | 358lm              |
| Light output ratio                 | 34.42lm/W          |
| Power consumption                  | 10.4W              |
| Led type                           | 9W Array*          |
| CCT (Correlated Color Temperature) | 3000K              |
| CRI (Color Rendering Index)        | >80                |
| Life expectancy                    | 50000Hrs           |
| Control type                       | DIMMABLE (On Head) |
| Input Voltage                      | 120-240V           |
| Driver                             | Plug-In            |

### Colors & Finishes

Aluminum


### Materials

- Arms and diffuser in aluminum
- Joints and tension control knobs in polished die-cast aluminum
- Tension cables in stainless steel
- S-Bracket in polished die-cast aluminum

### Features & Accessories

- Fully adjustable, articulated arm structure
- Tiltable and rotatable diffuser (90 degrees in both directions)

### Dimensions

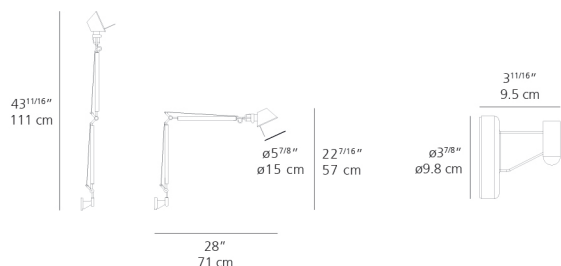

### Packaging


2 Boxes

1 x 10-5/16" x 7-9/16" x 33-3/16" / 3.75 lbs - 26 cm x 19 cm x 84 cm / 1.702 kg

1 x 4-7/16" x 4-7/16" x 4-7/16" / .55 lbs - 11 cm x 11 cm x 11 cm / .25 kg

### Light distribution

Direct



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane

### Luminaire weight

1.73 lbs / .79 kg

### Warranty

5 year limited warranty