
300001180 300001405 300001428 300001429



RAISED GARDEN BED

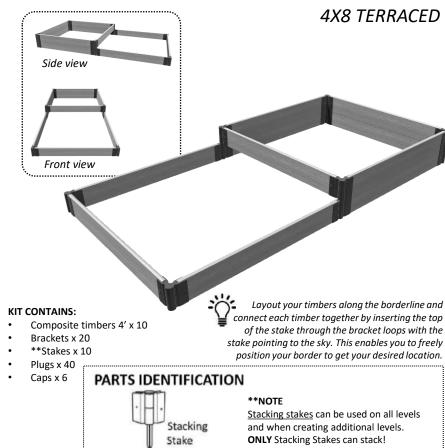

Trim stake spike with hacksawfor use indoor or on hard surfaces

FOR INDOOR & HARD SURFACE:

If you plan to assemble raised bed on a hard surface, use hacksaw to remove the spike of each stake. Use these cut down stakes for the base level only of your raised garden.

ASSEMBLY INSTRUCTIONS

STEP 1:

Assemble the timbers by sliding one end of timber into channel end of one of the brackets. Use plugs to cover the holes on both sides to lock the bracket in place.



Repeat this process on the opposite end of the timber flipping the bracket in the opposite direction (see image). **Repeat for all timbers.**

STEP 2:

STEP 3:

Layout the base level of your raised garden in a straight rectangular shape, using 6 x 4' timbers. Insert stake through the hole of the bracket and into each of the corners to lock all sides in place.




For the 2^{nd} level, layout the level in a square shape, using $4 \times 4'$ timbers. Insert stake through the hole of the bracket and into each of the corners to lock all sides in place.



Lastly, add caps to each of the top corner joints to finish off the raised garden.

HAPPY GARDENING!

How the Joints Work





Use plugs (included) to cover the holes on both side of timbers

