



Product overview

Quietspace® Panel is a high-performance acoustic treatment engineered to absorb 85% of the sound energy it meets. Made from 100% polyester fibre, Quietspace Panel has a hard, compressed face and cushioned backing, available in 25 mm, 50 mm, 75 mm, and 100 mm thicknesses.

Specification

(Wall/Ceiling) treatment shall be Quietspace® Panel made from thermally bonded polyester containing not less than 45% recycled material as manufactured by Autex www.autexglobal.com

ISO9705: Classification: Group 1-S, AS ISO 9705 – 2003: Group 1, EN13501-1:2007: B – s2, d0 50 mm: EN13501-1:2007+A1:2009: B - s2, d2

Panel 1220 mm x 2440 mm x ()mm nom depth, sound absorption: 25 mm: Class C, NRC 0.85, 50 mm: Class A, NRC 1.00. Fire rating 25 mm, 50 mm, 75 mm and 100 mm:

Install as per Autex Acoustics recommendations. If Quietspace Panel is to be specified for use other than as a ceiling or wallcovering please seek guidance from your account manager.

Product specifications

Product name	Quietspace® Panel
Composition	100% polyester fibre (PET)
Panel dimensions	1220 mm x 2440 mm
Tolerance	(+ 5 mm) x (+ 10 mm)

Light reflectance

White Quietspace Panel is suitable for indoor use only and has a light reflectance value of 83 (measured in accordance with BS 8493:2008+A1:2010).

Thickness	25 mm	50 mm	75 mm	100 mm
Tolerance	(+/- 6%)	(+/- 6%)	(+/- 6%)	(+/- 6%)
Weight	2300 gsm	3800 gsm	4050 gsm	4300 gsm

Thermal performance

(Internally tested by Autex Lab)

25 mm: R0.6 (@15°C)
50 mm: R1.4 (@15°C)
75 mm: R1.9 (@15°C)
100 mm: R2.4 (@15°C)

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack, or available on the website. In situations where product is being installed near fire protection systems (e.g. sprinklers or fire alarms) relevant building codes, standards and design rules must be adhered to.

Please consult the project engineer and relevant expert such as a fire protection engineer. If Quietspace Panel is to be specified for use other than as a wallcovering, please seek guidance from your account manager.



Product specifications

Fire ratings

Quietspace Panel has been evaluated using the following test methods:

ISO 9705: 1993

Classification: Group 1-S
Smoke production rate:
<5.0m²/s

As required by NZBC C/VM2

AS ISO 9705 - 2003

Classification: Group 1
(SMOGR_{Arc}): <100m²/s²

Assessed using methodology AS ISO 9705:2003 in accordance with AS 56371:2015, as required by BCA Specification C110-4 FI 4871

FAR 4055

EN13501-1:2007

(25 mm Quietspace[®] Panel)

B - s2, d0

Report 185157

EN13501-1:2007+A1:2009

(50 mm Quietspace[®] Panel)

B - s2, d2

Report WF 3369

ASTM E84 - 14

(1" Quietspace[®] Panel)

Class A, FS:0 - SD:10

RJ3297

Water vapour sorption

ASTM C1104 / C1104M-13a

Test conditions: 49°C, 95%RH

Water vapour absorbed and adsorped after 4 days:

0.4% by weight.

Pattern repeat

Non-woven. No pattern repeat but product has directional grain. Product may vary from samples and batch to batch due to fibre blending and lay-up, which is an inherent feature of this product.

Impact resistance

ISO 7892:1988

Hard body impact

There is no surface damage or penetration to Quietspace Panel when subjected to hard body impacts. A small indentation might be observed when subjected to an impact equivalent to the impact of a 0.5 kg object dropped from a 0.5 m height. When adhered to 10 mm plasterboard, the system can resist a 14 joule impact, and no further indentations are observed. This is equivalent to the impact of a 0.5 kg object dropped from a 3 m height.

Soft body impact

There is no surface damage or penetration to Quietspace Panel when subjected to soft body impacts. When adhered to 10 mm plasterboard, the system can resist a 120 joule impact. This is equivalent to the impact of a 50 kg object dropped from a 250 mm height.

Microbial resistance

ASTM G21-15

Growth rating: 0 (No growth)

Quietspace Panel does not promote the growth of moulds and mildew.

Fabric care

Blot spills from fabric quickly.

Wipe with a damp cloth. Avoid rubbing and excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean dry cloth after each application of solution. Custom printed Quietspace Panel requires the services of a specialist cleaning company. Refer to the Quietspace Panel Care and Maintenance Guide for more information.

Environmental

Autex Acoustics is committed to best practice through our ISO 14001 certified Environmental Management Systems.

Quietspace Panel contains a minimum of 45% previously recycled polyester fibre (from PET bottle-flake). Off-cuts and manufacturing waste are re-used or recycled wherever possible.

Quietspace Panel is manufactured from 100% polyester fibre and does not contain formaldehyde binders. Autex Acoustics polyester fibres supports safer indoor air quality and will not become a potential airborne pollutant.

Service

For further information about Quietspace Panel or any other Autex Acoustics product, please contact your account manager or visit our website.

Acoustic performance

Quietspace Panel is specifically designed to reduce and control reverberation and echo noise in building interiors. Minimum Noise Reduction Coefficient 0.85

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
● 25 mm	0.15	0.45	0.85	1.00	1.00	0.95	0.85
● 50 mm	0.30	0.75	1.10	1.10	1.05	1.00	1.00
● 75 mm	0.50	0.90	1.05	1.05	0.95	0.90	1.00
● 100 mm	0.65	1.00	1.05	1.00	0.95	0.90	1.00

Table presents the practical sound absorption coefficients as according to ISO 11654. Graph presents third octave sound absorption coefficients (according to ISO 354 measurement of sound absorption in a reverberation room.) The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.


Absorption Coefficient According ISO 354 University of Auckland Testing Service

Quietspace Panel 25 mm - test no. T0712-18

Quietspace Panel 50 mm - test no. T11228-8

Quietspace Panel 75 mm - test no. T1905-4

Quietspace Panel 100 mm - test no. T1905-5

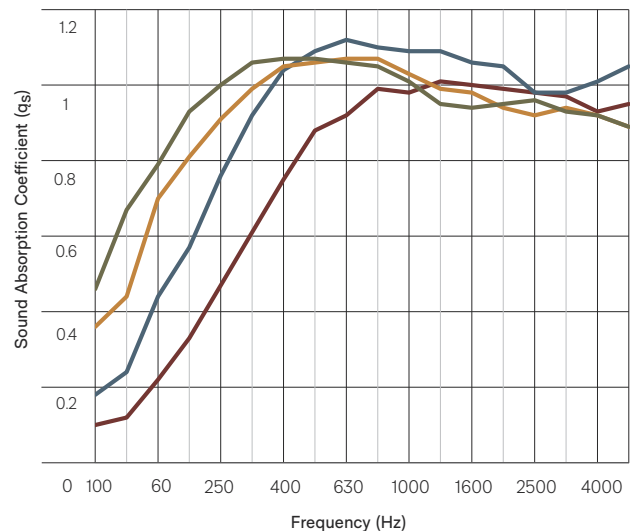



Caring for the environment

Quietspace Panel is manufactured using 100% polyester fibre and contains a minimum of 45% recycled fibre (from PET plastics). Our products are designed to be recycled at the end of their life too.

We have continual improvement programmes in which we implement a range of initiatives to mitigate the environmental 'hotspots' that we have identified. Our products are GreenRate Level A, Health Product Declaration (HPD), and CDHP Standard certified.

Quietspace Panel is DeclareSM certified to be Red List free and can be used in Living Building Challenge projects. Autex has a high functioning Environmental Management System (ISO 14001) to enhance our environmental performance and contribute to sustainable development.



● **Autex Industries Ltd**
702-718 Rosebank Rd
Private Bag 19988
Avondale 1746, Auckland
New Zealand
Freephone 0800 428 839
Phone +64 9 828 9179
Fax +64 9 828 5810

● **Autex Australia Pty Ltd**
166 Bamfield Road
PO Box 5099
West Heidelberg, Melbourne
VIC 3081, Australia
Freephone 1800 678 160
Phone +61 3 9457 6700
Fax +61 3 9457 1020

● **Autex Acoustics Ltd**
Unit J4, Lowfields Way,
Lowfields Business Park,
Elland, West Yorkshire
Hx5 9Da
United Kingdom
Phone +44 0 1422418899

● **Autex Acoustics LLC**
19350 Van Ness Avenue
Torrance, CA 90501
United States of America
Phone +1 424 203 1813

An ISO 9001, ISO 14001 and ISO 45001 certified company. The brand names and logos mentioned herein are registered or unregistered trademarks either owned or used under license by Autex Industries Limited or other members of the Autex Group. The contents of this document are protected by Copyright 2021 Autex Industries Ltd. All Rights Reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.