

HOW TO HANG

YOUR WALL HANGING

Your package includes 2 screws, 1 wall hanging attached to wood rod, and 2 wood hanger bases. You will need to grab a ruler/measuring tape, level, power drill and a pencil to get started.

STEP-BY-STEP

STEP 1: FIND PERFECT PLACEMENT

Grab a friend to help hold the wall hanging up by the rod to find the perfect placement. No need to hold the x2 base pieces up yet.

STEP 2: MARK HANGING ROD ENDS

After finding the perfect placement, make sure the wall hanging is level.

Then, mark the end and bottom edge of the wood rod. Repeat for the other side.






STEP-BY-STEP CONTINUED

STEP 3: MOUNT BASES TO THE WALL

After removing the wall hanging, place one of the bases inside the pencil mark - make sure the outer edge and bottom edge are aligned with the marks you made. Then, using your power dill, drill a screw into the designated hole on the hanger base to mount to the wall. Repeat for the other side.

STEP 4: HANG YOUR WALL HANGING

Once the bases are secured into the wall, carefully hang your wall hanging up. If any of the tassels became tangled during hanging, be sure to gently use your fingers or a wide tooth comb to brush them out and return them to their original neat state.

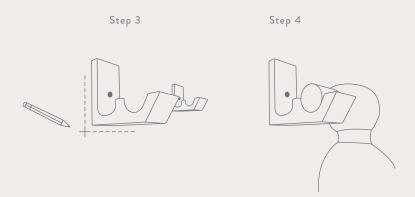

THE CITIZENRY

Questions? We're here to help.
1.866.356.4284 // assistant@the-citizenry.com.