



HOW TO HANG YOUR RUG HANGER


Your package includes one wooden rug hanger - screws already loosely in place.

You will need to grab a screwdriver, level, two nails, two screws and anchors, a hammer, and a pencil from your tool box to get started!

STEP 1: SECURE YOUR RUG

Lay the rug hanger on a flat surface - screws facing up. Then, insert 1 inch of your rug in between the two wooden planks of the hanger. Do your best to keep the rug as straight as possible!

Once the rug is in place, use your screwdriver to tighten the two screws until the wood planks are able to hold the rug in place.

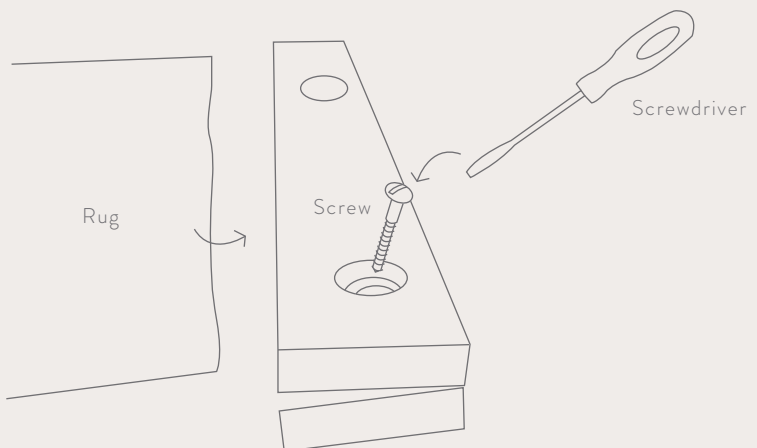

STEP 2: “X” MARKS THE SPOT

Hold the rug hanger level in the desired location on your wall. Once you’ve got it exactly where you’d like it, use your pencil to make two marks 3 ½ inches in from each end of the rug hanger. Then, set the rug hanger aside and make two more marks ½ inch below your first marks. These will be your final marks.

STEP 3: TIME TO DRILL

Determine if you are drilling into a wall stud. If so, use a 3/32” drill bit to make a hole on your mark. Drill at a 90-degree angle for best results. Then, drill the screw into the hole. Remember to leave 1/4 of the screw exposed.

If you are not drilling into a stud, you’ll need to use an anchor. Use a 1/4” drill bit to create the hole and carefully hammer the anchor into it until it is flush. Finally, drill the screw straight into the anchor. Leave 1/4 of the screw exposed.

STEP 4: LET’S HANG

Place your rug hanger over the two screws using the keyholes on the back. Voila! You’re done.

Questions? We’re here to help.

1.866.356.4284 // assistant@the-citizenry.com.

THE CITIZENRY

WWW.THE-CITIZENRY.COM