


275/290//ALLOY - EXPLODED DIAGRAM

MEGA 275 ALLOY	
MATERIAL	HYDROFORMED 6061 TRIPLE-BUTTED ALUMINIUM
FORK TRAVEL	170MM (RS 180MM)
AXLE TO CROWN	562MM (RS 572MM)
AXLE TO CROWN	46MM
SHOCK TRAVEL	165MM
WHEELS SIZE	27.5"
MAX TYRE SIZE	2.5"
SHOCK SIZE	230X65MM
SHOCK HARDWARE F	25X8MM
SHOCK HARDWARE R	30X8MM
SIZING	S/M/ML/L/XL
HEADTUBE	44-56MM TAPERED SEMI-INTEGRATED
HEADSET	ZS44-28.6 - T2 / ZS56/40 - B8
BEARINGS REQUIRED	2X NP-5 (6902 2RS), 4X NP-7 (6800 2RS), 4X NP-106 (6901 2RS)
SEATPOST	31.6MM (INTERNAL ROUTING FOR DROPPER SEATPOST)
SEAT CLAMP	34.9MM
BB	THREADED 73MM BSA
REAR HUB	B00ST 148X12MM
REAR AXLE	SRAM MAXLE STEALTH M12X1.75 180MM
CHAIN GUIDE	ISCG05
BRAKE MOUNT	160MM DIRECT POST
PROTECTION	3D CONTOURED RUBBER FRAME PROTECTION FOR DT/SS/CS

MEGA 290 ALLOY	
MATERIAL	HYDROFORMED 6061 TRIPLE-BUTTED ALUMINIUM
FORK TRAVEL	170MM (RS 160MM)
AXLE TO CROWN	582MM (RS 591MM)
FORK OFFSET	44MM
SHOCK TRAVEL	160MM
WHEELS SIZE	29"
MAX TYRE SIZE	2.5"
SHOCK SIZE	230X62.5MM
SHOCK HARDWARE F	25X8MM
SHOCK HARDWARE R	30X8MM
SIZING	M/L/XL
HEADTUBE	44-56MM TAPERED SEMI-INTEGRATED
HEADSET	ZS44-28.6 - T2 / ZS56/40 - B8
BEARINGS REQUIRED	2X NP-5 (6902 2RS), 4X NP-7 (6800 2RS), 4X NP-106 (6901 2RS)
SEATPOST	31.6MM (INTERNAL ROUTING FOR DROPPER SEATPOST)
SEAT CLAMP	34.9 MM
BB	THREADED 73MM BSA
REAR HUB	B00ST 148X12MM
REAR AXLE	SRAM MAXLE STEALTH M12X1.75 180MM
CHAIN GUIDE	ISCG05
BRAKE MOUNT	160MM DIRECT POST
PROTECTION	3D CONTOURED RUBBER FRAME PROTECTION FOR DT/SS/CS

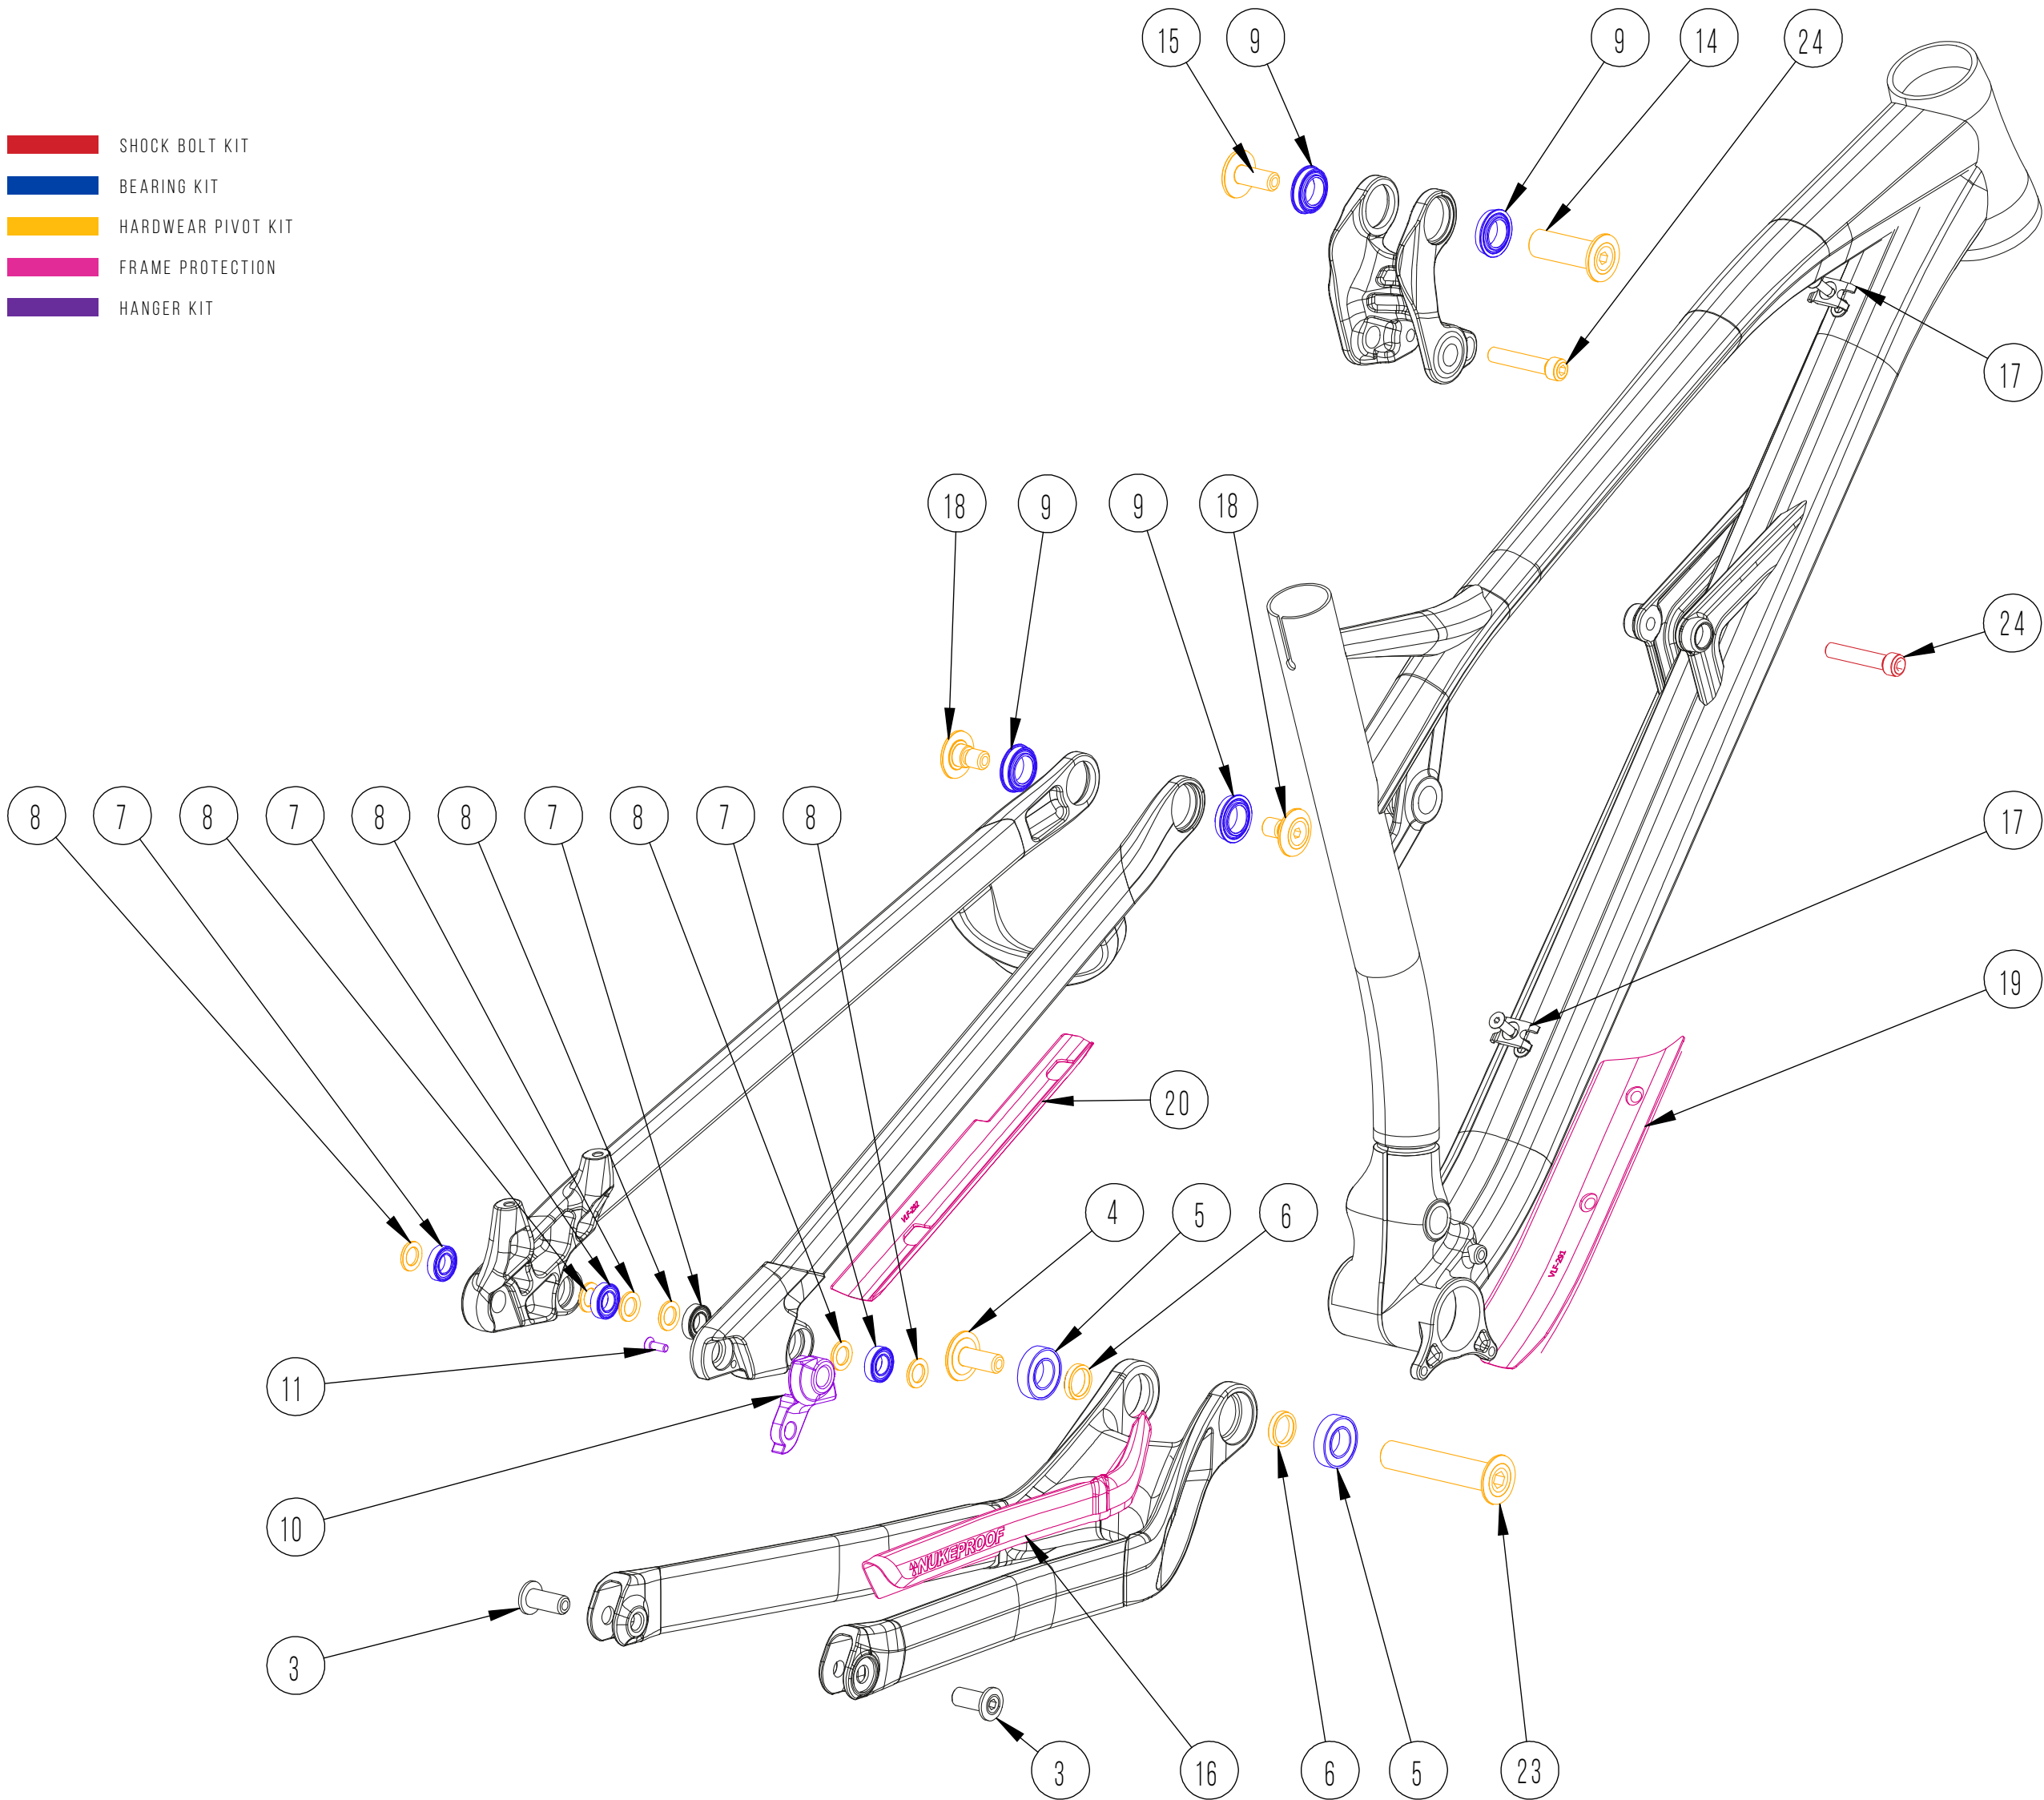


ITEM #	NUKEPROOF #	DESCRIPTION	QTY
3	NPMG-3	CHAIN STAY CLEVIS BOLT	2
4	NPMG-4	MAIN PIVOT BOLT	1
5	NPMG-5	6902-2RS (B1)	2
6	NPMG-6	MAIN PIVOT SPACER	2
7	NPMG-7	6800-2RS (B2)	4
8	NPMG-8	CHAIN STAY CLEVIS SPACER	6
9	NPMG-9	61802-2RS1 EXTENDED (B3)	4
10	NPMG-10	HANGER	1
11	NPMG-11	M4X12 HANGER SCREW	1
14	NPMG-14	SWING LINK AXLE	1
15	NPMG-15	SWING LINK BOLT	1
16	NPMG-16	CHAIN STAY PROTECTOR	1
17	NPMG-17	CABLE GUIDE	2
18	NPMG-18	SEAT STAY CLEVIS AXLE NUT	2
19	NPMG-19	DT PROTECTOR	1
20	NPMG-20	SS PROTECTOR	1
23	NPMG-23	MAIN PIVOT AXLE	1
24	NPMG-24	SHOCK BOLT	2

275/290//ALLOY - TORQUE AND GREASE DIAGRAMS


RECOMMENDED TORQUE VALUES

PART NUMBER	TORQUE
SHOCK BOLTS	15NM
SWING LINK	8NM
MAIN PIVOT	15NM
HORST LINK	6NM
CABLE GUIDES	3NM
HANGER	3NM

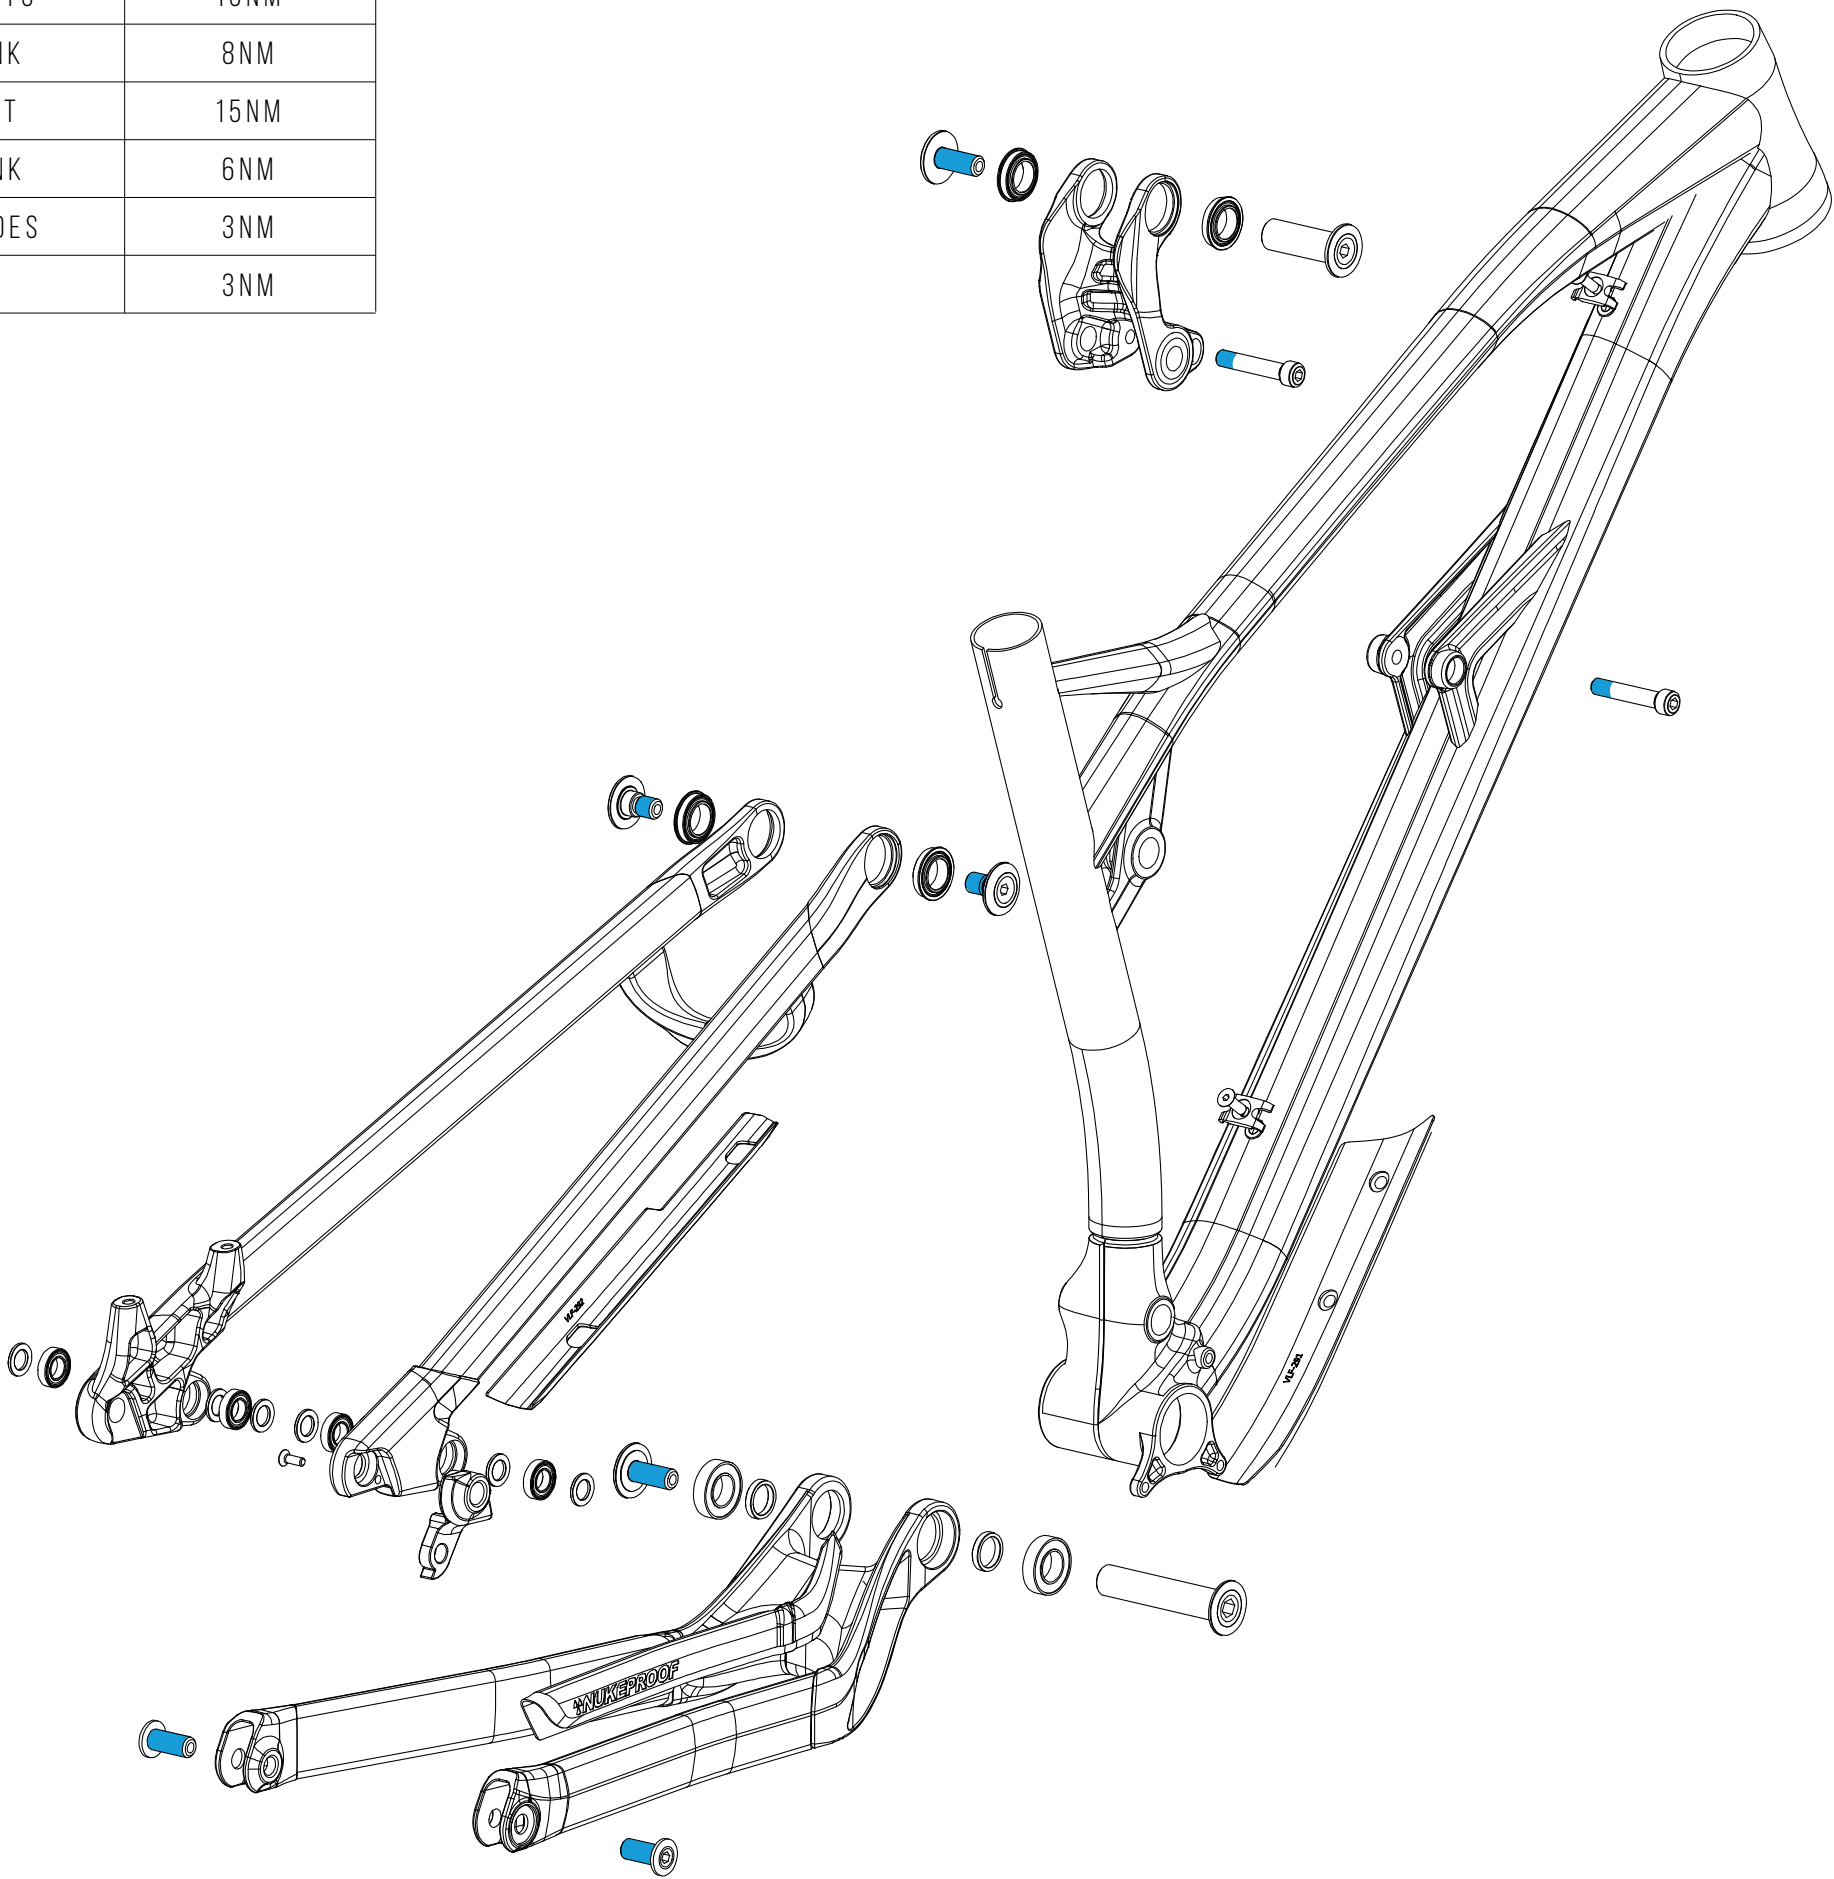

NOTE: USE MEDIUM STRENGTH THREADLOCK
WE RECOMMEND: LOCTITE 243

THREADLOCK

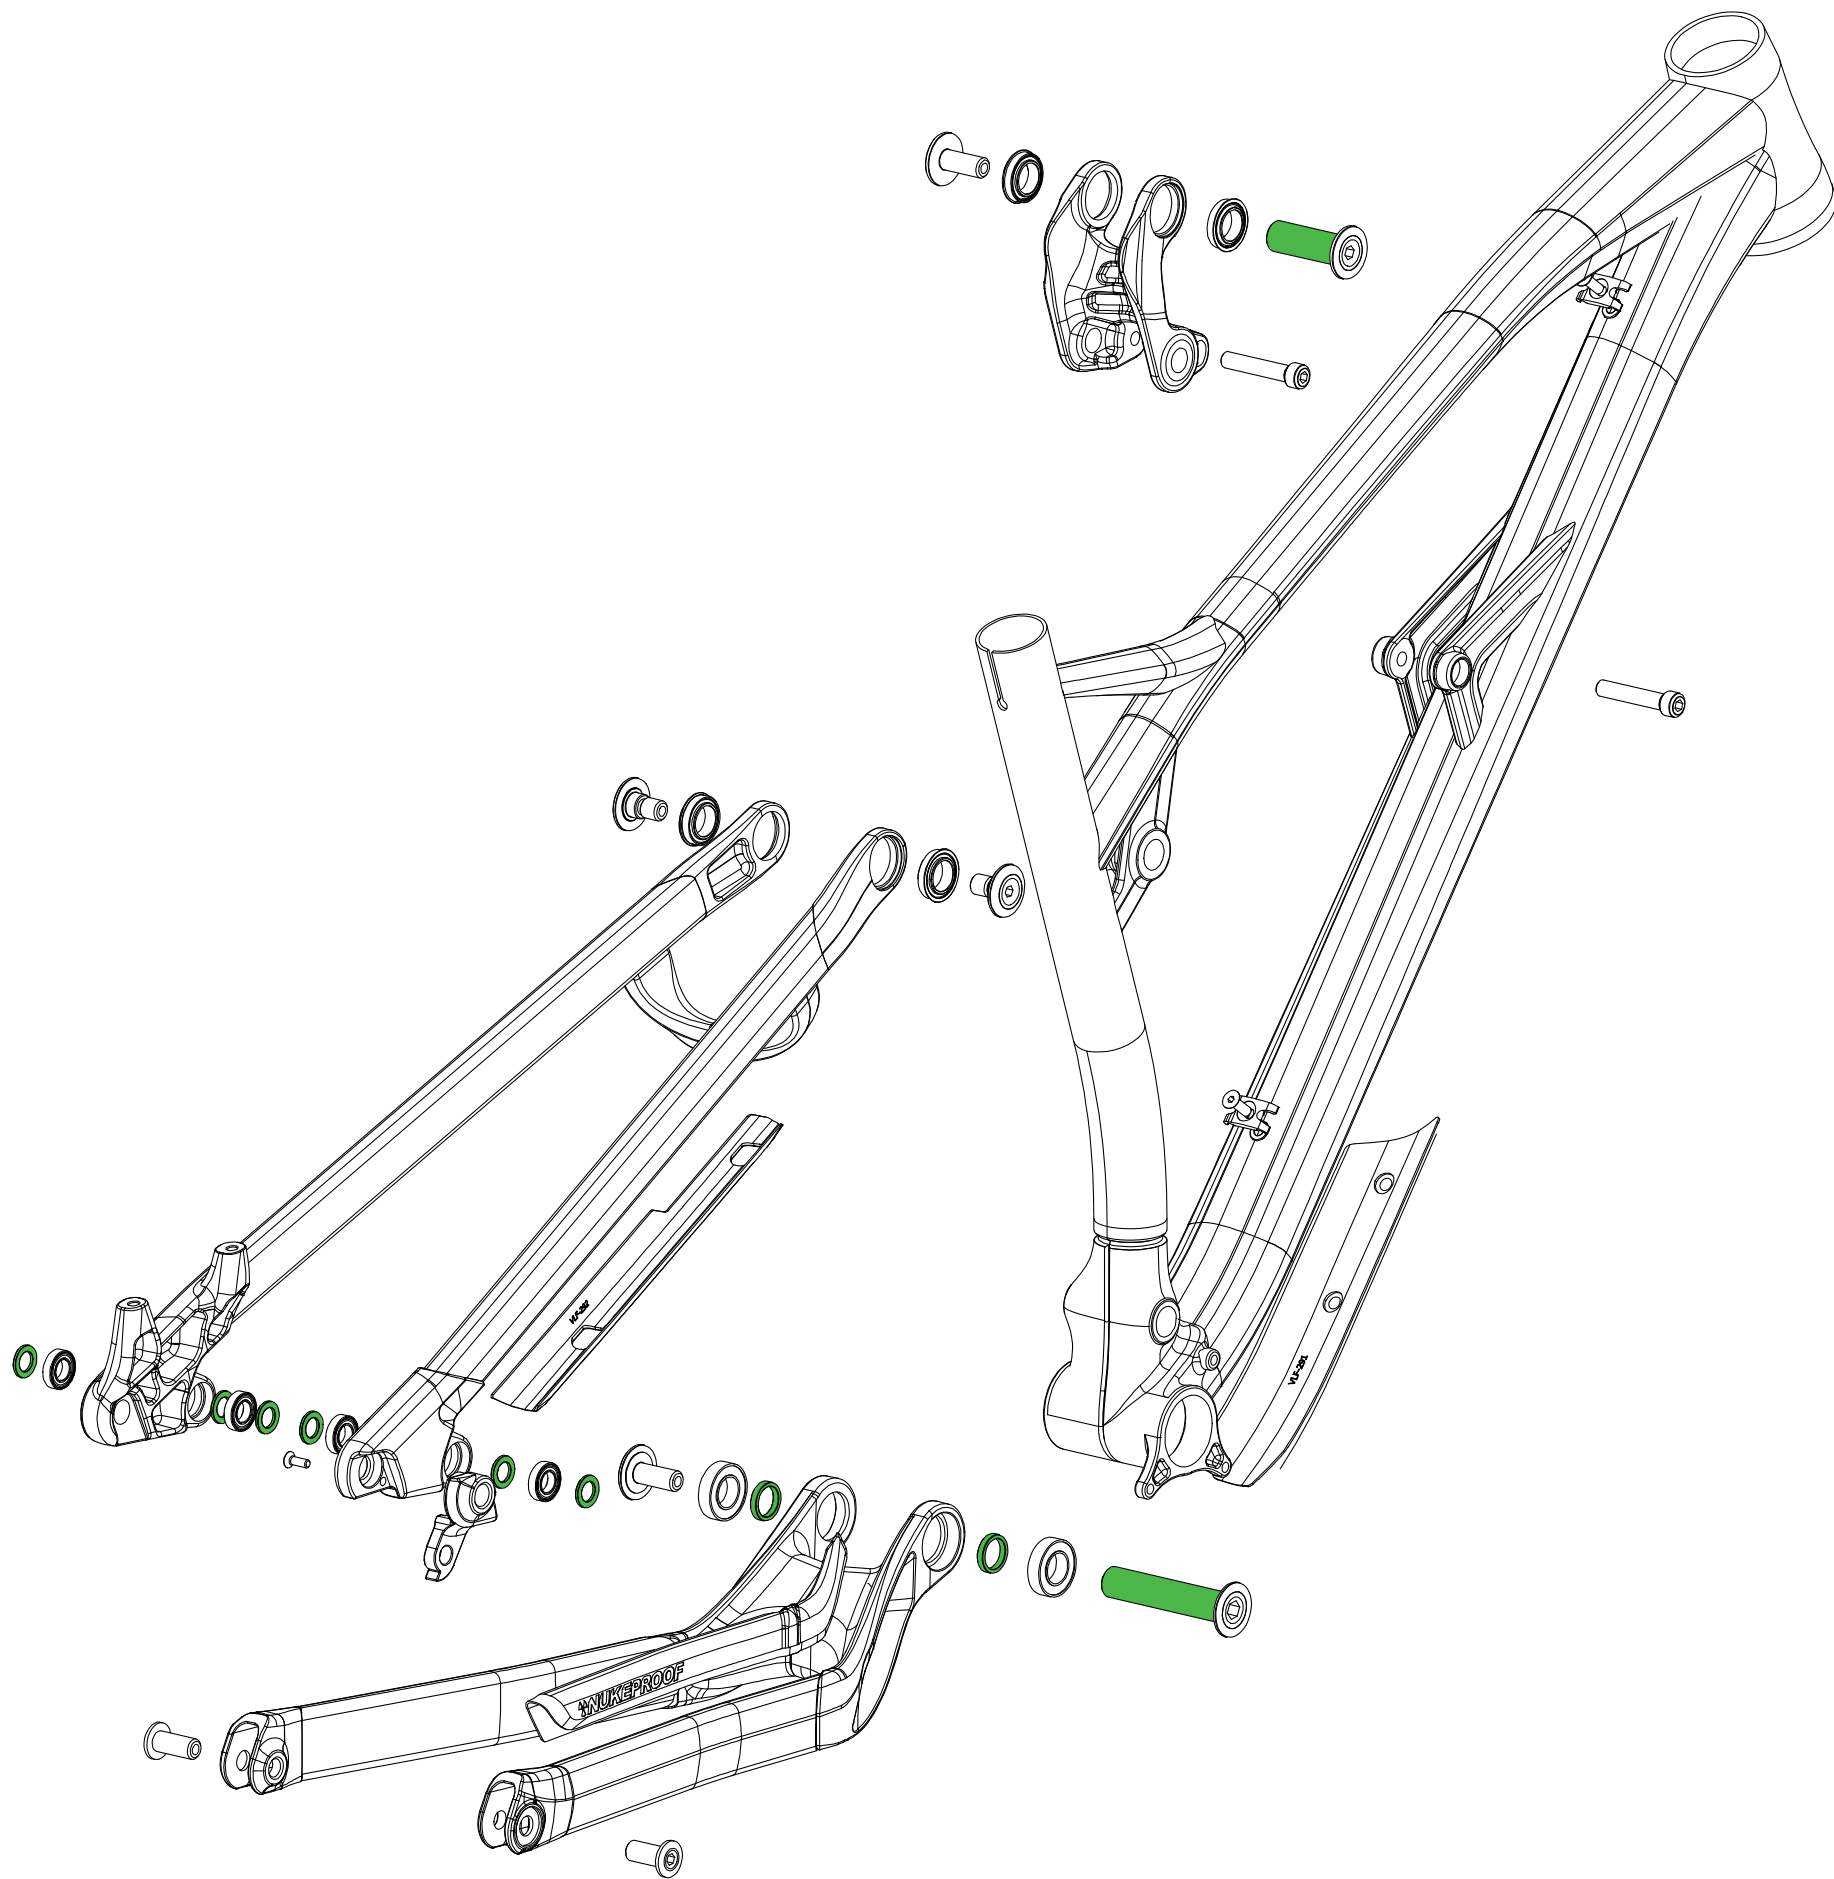

GREASE