***NUKEPROOF**


HOW TO REMOVE AND INSTALL YOUR NUKEPROOF MEGAWATT BATTERY

ITEMS REQUIRED

4mm hex key



REMOVAL

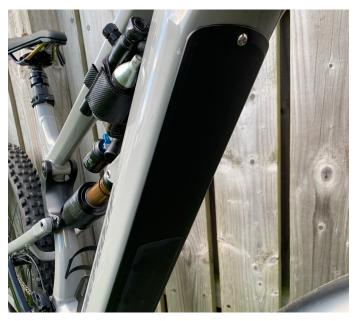

 Set your bike upright somewhere safe and look under the downtube



Loosen the bottom left hand bolt on the battery door1 full turn using your 4mm hex key



Loosen the bottom right hand bolt on the battery door 1 full turn using your 4mm hex key



4. Fully remove the top battery door bolt



5. Slide the battery door upwards to remove



Using your 4mm hex key, carefully turn the silver battery release bolt CLOCKWISE



7. The battery should slide forwards and stop as per photo



8. Push the silver clip down to fully release the battery



9. Lift the battery out of the frame

INSTALLATION





10. Check the battery holder to ensure it is in good condition and there is no damage to any part of it



11. Rotate the battery so that the locating plastic part on the mount lines up to the hole in the battery casing



12. Line the battery up and push into the frame



13. The battery should be fully seated after you hear two clicks



14. Slide your battery door back into place



15. Tighten the top bolt first using your 4mm hex key



16. Tighten the lower left bolt using your 4mm hex key



17. Tighten the lower right bolt using your 4mm hex key

Your battery has now been refitted and you are ready to ride