

# Eco-5

Lightweight, single jacket construction, combining 100% polyester ring spun staple and filament fibers over a thin wall, high tensile, EPDM rubber liner. The outer jacket is mildew resistant and available with double dip "Key-Lok" polyurethane based polymer impregnation for unmatched abrasion and moisture resistance. A proprietary reverse twill weave construction reduces friction loss, while high tensile yarn combinations allow hose to be 25% lighter. Hose features a 5-year warranty, is FM Approved, tested to 600 psi, and UL Listed\*.

## RUBBER LINED INDUSTRIAL HOSE


Eco-5 can be coupled with 6061-T6 aluminum threaded couplings or Storz. Brass, special threads or other custom features available upon request.

### SINGLE JACKET INDUSTRIAL HOSE



Diameter	Part No.	Service Test	Proof Test	Burst Test	Bowl Size	Weight Uncoupled
1"	SP10-600	300 psi	600 psi	900 psi	1 <sup>3</sup> / <sub>16</sub> "	0.10 lbs/ft
**1 <sup>1</sup> / <sub>2</sub> "	SP15-600	300 psi	600 psi	900 psi	1 <sup>3</sup> / <sub>4</sub> "	0.15 lbs/ft
*2"	SP20-600	300 psi	600 psi	900 psi	2 <sup>1</sup> / <sub>4</sub> "	0.17 lbs/ft
**2 <sup>1</sup> / <sub>2</sub> "	SP25-600	300 psi	600 psi	900 psi	2 <sup>3</sup> / <sub>4</sub> "	0.28 lbs/ft

\*UL Listed to 250 psi | \*\*UL Listed to 250 psi and FM Approved

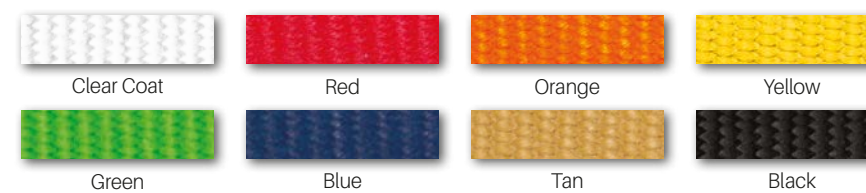

NFPA Colors Available

MADE IN USA

