


# **Closet Rod Profiles**

**OVAL ALUMINUM** 

1.2 mm wall 17 gauge

W:15mm x H:30mm



### **OVAL CHROME**

1.3 mm 16 gauge


W:15mm x H:30mm



### SIGNATURE ALUMINUM

2.0 mm wall 12 gauge


W:22mm x H:32mm



#### ROUND 1-1/16 POLISHED CHROME 1.6 mm

14 gauge


1-1/16 inch diameter



#### ROUND 1-1/16 ALUMINUM

2.0 mm wall 12 gauge

1-1/16 inch diameter




### ROUND 1-1/16 STAINLESS STEEL

1.6 mm 14 gauge 1-1/16 inch diameter

### ROUND 1-5/16 POLISHED CHROME

14 gauge 1-5/16 inch diameter



### ROUND 1-5/16 ALUMINUM

2.0 mm 12 gauge

1-5/16 inch diameter

#### ELITE ROUND 1-5/16 ALUMINUM


2.0 mm 12 gauge

1-5/16 inch diameter



**Closet Rod Performance** 



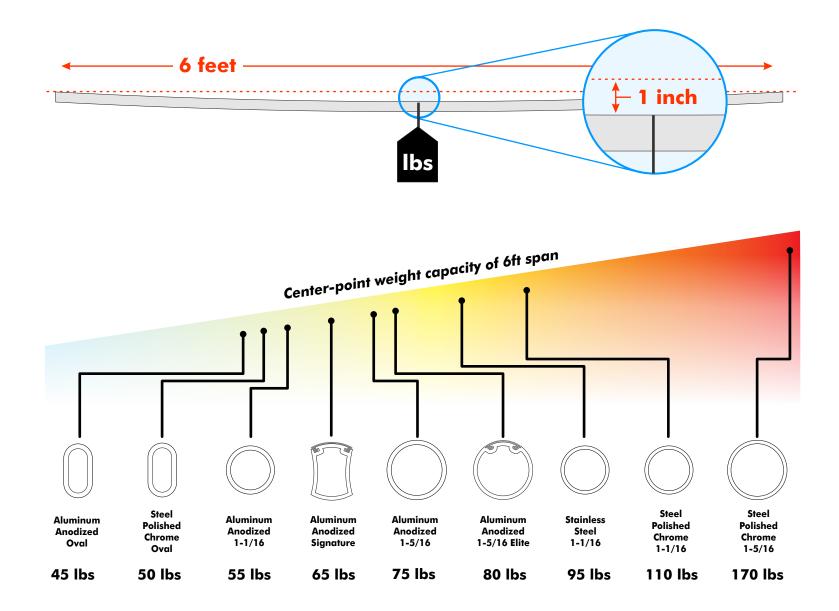



### Wall Mounting Closet Rod




#### Mounting With Two Open Flanges

For an installation using two open flanges, be sure to account for the thickness of the flange back plates; the total space they occupy in the wall-towall width must be subtracted from the closet rod length.



#### Mounting With Two Closed Flanges

Measure and mark locations for each flange. Slide flanges over closet rod. With assistance, hold rod

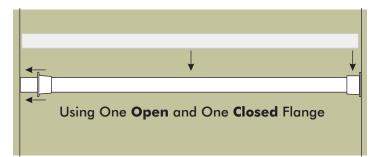

Mounting With One Open and One Closed Flange

For an installation using one open and one closed flange, be sure to account for the thickness of the open flange back plate; the total space it occupies in the wall-to-wall width must be subtracted from the closet rod length.



### **Open & Closed Mounting Flanges**

# **Open Flange**

Open flanges are open at the top to allow for the

# **Closed Flange**

Closed flanges are closed around the entire

Some flanges have a back plate and some are open all the way through to the wall. Knowing what kind you're using will allow you to accurately fit your closet rod. All Closetbay open flanges have a back plate. Closed flanges are usually open to the wall, the exception being the invisible



# **Closet Rod Worksheet**

First measure from wall to wall, or mounting surface to mounting surface. It's important to be as accurate as possible so you may want to have someone help. Because walls are usually not perfectly flat you should measure from the actual points where the closet rod will be mounted to get the most precise results.

The wall to wall measurement is:

This is your total width (TW).

Pick a flange combination

Decide which profile of closet rod you'd like to use.

