



Assolo parete|soffitto

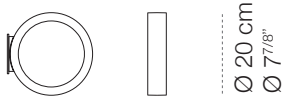


20,4 cm
8"

4,5 cm
1 3/4"

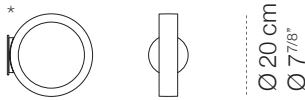

20,4 cm
8"


9,2 cm
3 5/8"

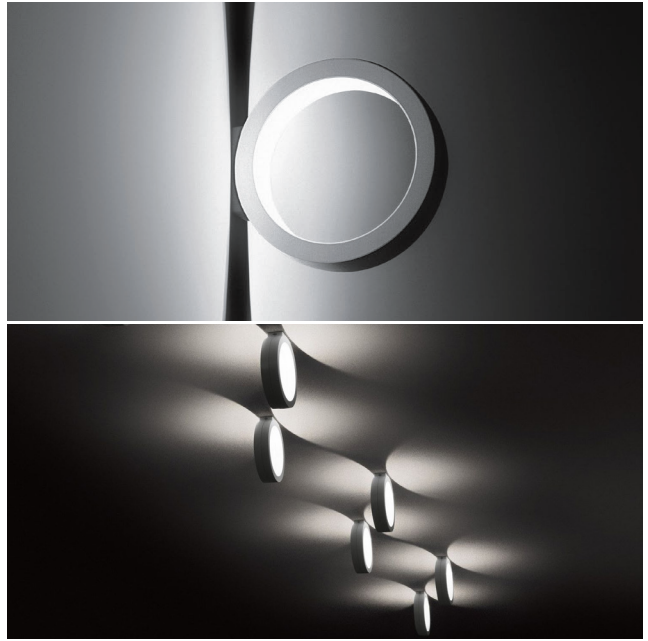



luminaire	
materials	aluminium
environment	interiors
mounting location	wall/ceiling
emission	indirect light
weight	0,8 kg
voltage	230V
ballast	integrated electronic dimmable
dimming	phase-cut (compatible with remote Casambi Bluetooth dimmer)
insulation class	1
IP classification	IP20
certifications	CE

light source	
source	LED
number of led	1
power	16W
luminous flux	1.300 lm
colour temperature	2.800K
CRI	≥ 80
energy label	

finish		
white cod 1520	black cod 1524	matt gold cod 1554
with round plate* white cod 1522	with round plate* black cod 1523	with round plate* matt gold cod 1555
junction box plate white cod 1528	junction box plate black cod 1530	junction box plate matt gold cod 1558

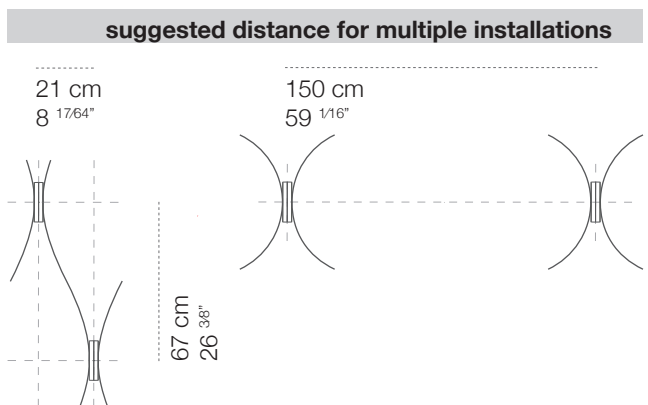


Assolo ON/OFF parete | soffitto

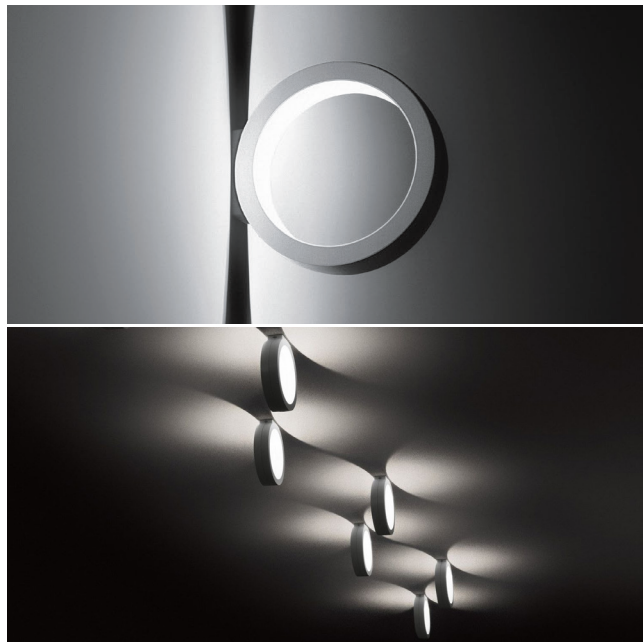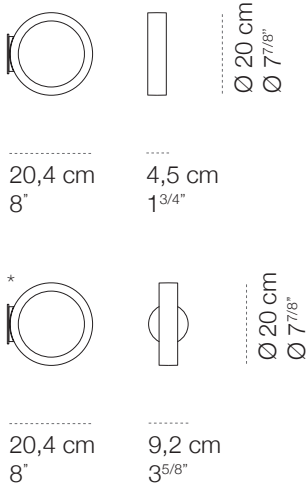

luminaire	
materials	aluminium
environment	interiors
mounting location	wall/ceiling
emission	indirect light
weight	0,8 kg
voltage	230V
ballast	integrated electronic dimmable
dimming	not dimmable
insulation class	1
IP classification	IP20
certifications	CE
design	Luta Bettonica, 2013


light source	
source	LED
number of led	1
power	16W
luminous flux	1.300 lm
colour temperature	2.800K
CRI	≥ 80
energy label	

finish		
white cod 1532	black cod 1537	matt gold cod 1556
with round plate* white cod 1533	with round plate* black cod 1536	with round plate* matt gold cod 1557
junction box plate white cod 1528	junction box plate black cod 1530	junction box plate matt gold cod 1558

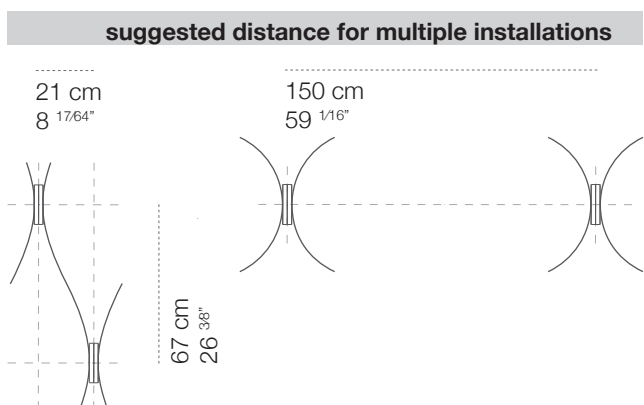

CINI & NILS

Assolo appoggio



Ø 20 cm
Ø 77/8"

9,5 cm
33/4"

20,7 cm
91/7"




luminaire	
materials	aluminium
environment	interiors
mounting location	table
emission	indirect light
weight	0,9 kg
voltage	110V-240V
ballast	electronic plug
dimmer	integrated touch dimmer
insulation class	1
plug	eur/usa/uk
IP classification	IP20
certifications	CE
design	Luta Bettonica, 2013

light source	
source	LED
number of led	1
power	10W
luminous flux	1.000 lm
colour temperature	2.800K
CRI	≥ 80
energy label	

finish		
white cod 1560	black cod 1561	matt gold cod 1559

versions		
Assolo appoggio	Assolo43 appoggio	Assolo70 terra

Assolo43 soffitto

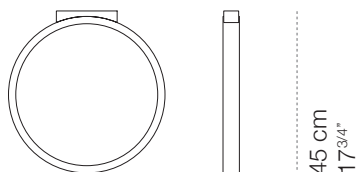



Ø 43 cm
Ø 17"

4,5 cm
1 3/4"




luminaire	
materials	aluminium
environment	interiors
mounting location	ceiling
emission	indirect light
weight	3,0 kg
voltage	230V
ballast	integrated electronic dimmable
dimming	phase-cut (compatible with remote Casambi Bluetooth dimmer)
insulation class	1
IP classification	IP20
certifications	CE


finsh		
		
white cod 1565H	black cod 1562H	matt gold cod G1565

accessories


Piastra tonda soffitto/sospesa


white cod 1569	black cod B1569	matt gold cod G1569
-------------------	--------------------	------------------------

light source	
source	LED
number of led	1
power	27W
luminous flux	2.900 lm
colour temperature	2.800K
CRI	= 92
energy label	

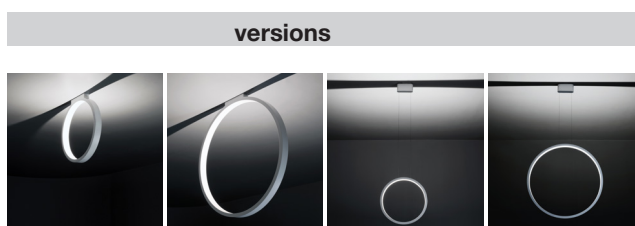

Assolo43 soffitto Assolo70 soffitto Assolo43 sospesa Assolo70 sospesa

Assolo70 soffitto

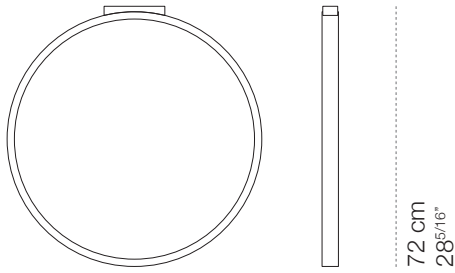




Ø 70 cm
Ø 27^{9/16}"


4,5 cm
1^{3/4}"

72 cm
28^{5/16}"




luminaire	
materials	aluminium
environment	interiors
mounting location	ceiling
emission	indirect light
weight	4,9 kg
voltage	230V
ballast	integrated electronic dimmable
dimming	phase-cut (compatible with remote Casambi Bluetooth dimmer)
insulation class	1
IP classification	IP20
certifications	CE


finsh		
		
white cod 1570H	black cod 1564H	matt gold cod G1570

accessories


Piastra tonda soffitto/sospesa

white cod 1569	black cod B1569	matt gold cod G1569
-------------------	--------------------	------------------------

light source	
source	LED
number of led	1
power	27W
luminous flux	2.900 lm
colour temperature	2.800K
CRI	= 92
energy label	

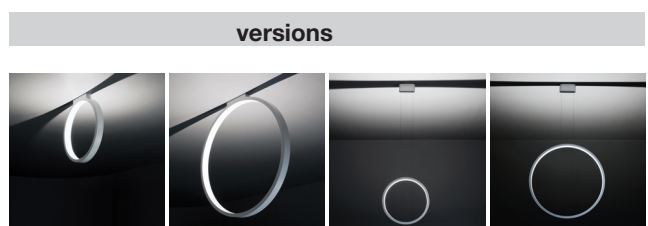


Assolo43
soffitto

Assolo70
soffitto

Assolo43
sospesa

Assolo70
sospesa


Assolo43 sospesa

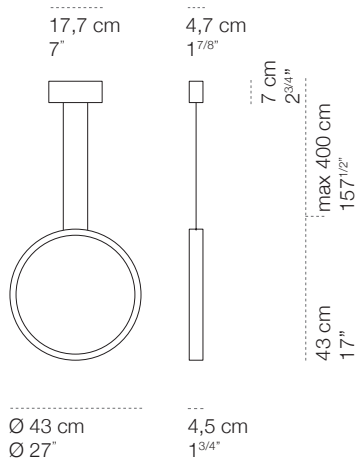

luminaire	
materials	aluminium
environment	interiors
mounting location	ceiling
emission	indirect light
weight	3,5 kg
voltage	230V
ballast	integrated electronic dimmable
dimming	phase-cut (compatible with remote Casambi Bluetooth dimmer)
insulation class	1
IP classification	IP20
certifications	CE

light source	
source	LED
number of led	1
power	27W
luminous flux	2.900 lm
colour temperature	2.800K
CRI	= 92
energy label	<p>Questo dispositivo è munito di lampade a LED integrate.</p> <p>Le lampade di questo dispositivo non sono sostituibili.</p> <p>LED</p> <p>874/2012</p>

finsh		
white cod 1566H	black cod 1563H	matt gold cod G1566

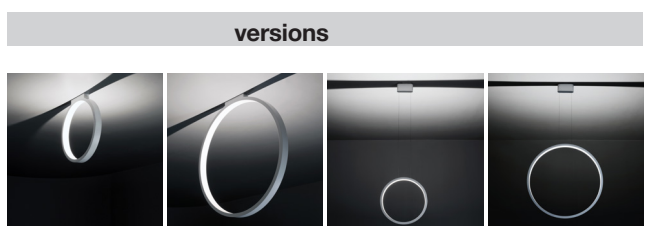


accessories		

Piastra tonda soffitto/sospesa

white cod 1569	black cod B1569	matt gold cod G1569
-------------------	--------------------	------------------------

Assolo43 soffitto Assolo70 soffitto Assolo43 sospesa Assolo70 sospesa


Assolo70 sospesa

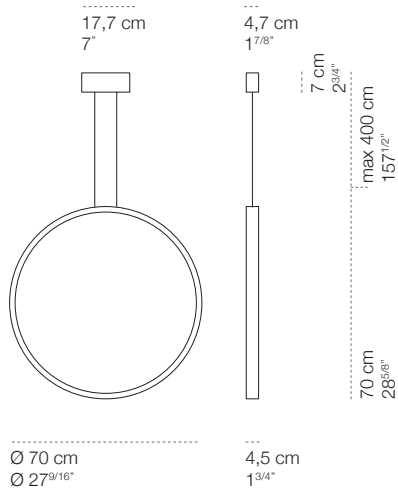

luminaire	
materials	aluminium
environment	interiors
mounting location	ceiling
emission	indirect light
weight	5,4 kg
voltage	230V
ballast	integrated electronic dimmable
dimming	phase-cut (compatible with remote Casambi Bluetooth dimmer)
insulation class	1
IP classification	IP20
certifications	CE

light source	
source	LED
number of led	1
power	27W
luminous flux	2.900 lm
colour temperature	2.800K
CRI	= 92
energy label	<p>Questo dispositivo è munito di lampade a LED integrate.</p> <p>Le lampade di questo dispositivo non sono sostituibili.</p> <p>874/2012</p>

finsh		
white cod 1571H	black cod 1574H	matt gold cod G1571

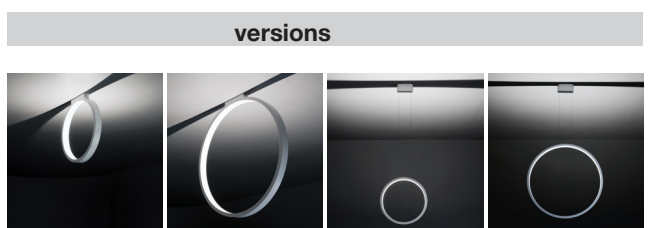



accessories		

Piastra tonda soffitto/sospesa

white cod 1569	black cod B1569	matt gold cod G1569
-------------------	--------------------	------------------------

Assolo43 soffitto Assolo70 soffitto Assolo43 sospesa Assolo70 sospesa


Assolo43 appoggio



45 cm
17^{3/4}"

Ø 43 cm
Ø 17"


17,5 cm
6^{7/8}"

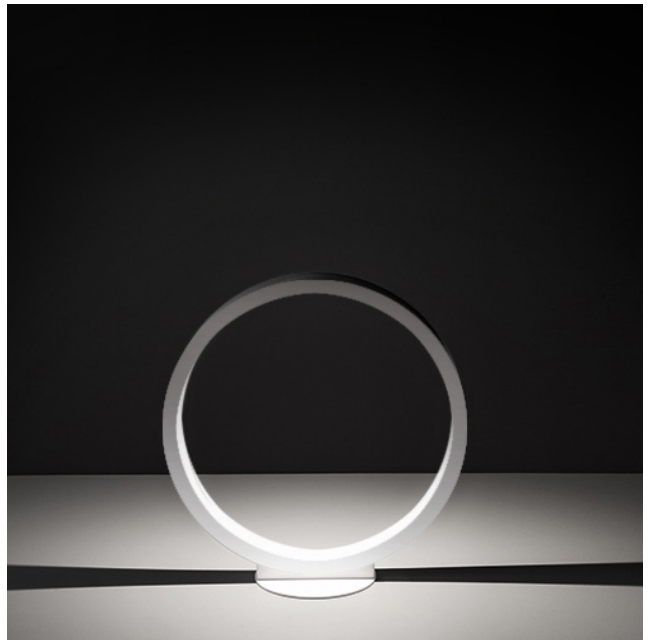


luminaire	
materials	aluminium
environment	interiors
mounting location	table/floor
emission	indirect light
weight	4,4 kg
voltage	230V
ballast	integrated electronic dimmable
dimmer	electronic in-line
insulation class	2
plug	european 2 poles
IP classification	IP20
certifications	CE □
design	Luta Bettonica, 2013

light source	
source	LED
number of led	1
power	27W
luminous flux	2.900 lm
colour temperature	2.800K
CRI	= 92

energy label



finsh		
		
white cod 1567H	black cod 1568H	matt gold cod G1567

versions		
----------	--	--




Assolo appoggio

Assolo43 appoggio


Assolo70 terra

Assolo70 terra

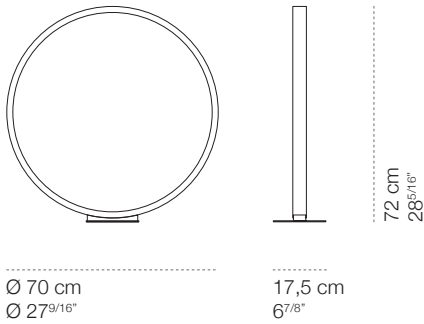


luminaire	
materials	aluminium
environment	interiors
mounting location	floor
emission	indirect light
weight	6,3 kg
voltage	230V
ballast	integrated electronic dimmable
dimmer	electronic in-line
insulation class	2
plug	european 2 poles
IP classification	IP20
certifications	CE □
design	Luta Bettonica, 2013

light source	
source	LED
number of led	1
power	27W
luminous flux	2.900 lm
colour temperature	2.800K
CRI	= 92

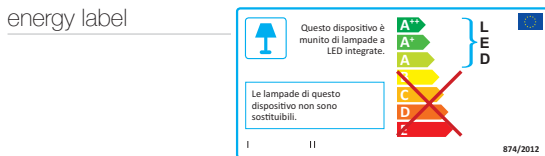

finsh		
white cod 1572H	black cod 1573H	matt gold cod G1572

versions


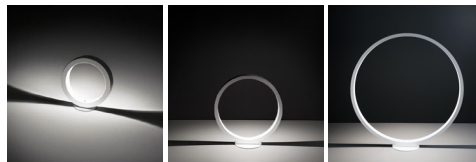


Assolo appoggio

Assolo43 appoggio


Assolo70 terra

Assolo outdoor

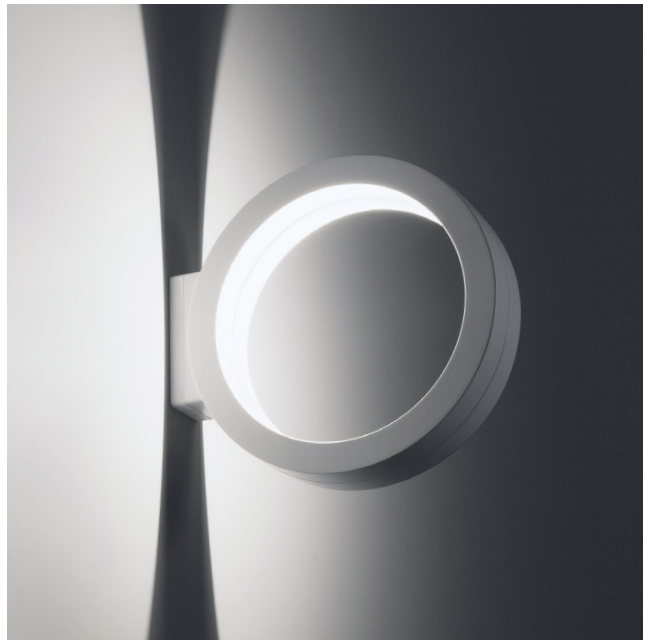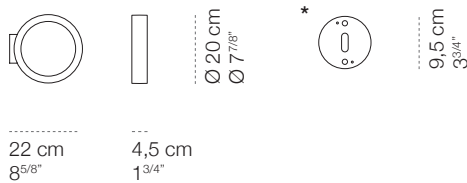


luminaire	
materials	aluminium
environment	outdoor
mounting location	wall, soffitto
emission	indirect light
weight	0,8 kg
voltage	230V
ballast	integrated electronic
dimming	not dimmable
insulation class	1
IP classification	IP65
certifications	CE
design	Luta Bettonica, 2013

light source	
source	LED
number of led	1
power	15W
luminous flux	1.200 lm
colour temperature	2.800K
CRI	95

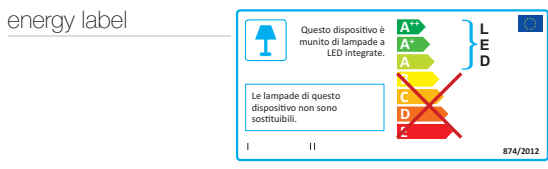

finish	
white cod 1575	metallized anthracite cod 1577

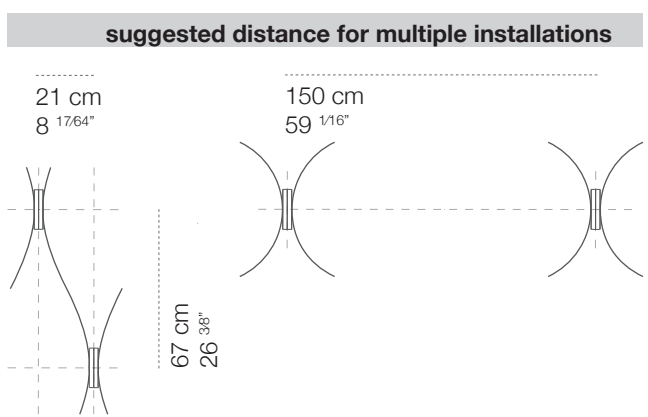

accessories	
*	
Piastra tonda	
white cod 1578	metallized anthracite cod 1580