BELL - SP BEL 090 - technical sheet





Ø 15 cm

kg 13.5 m³ 1.06

5 cm

56 cm

345

SPBEL090

Design by Manuel Vivian


Collection consisting of suspended and ceiling lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colours and sizes.

Typology: SUSPENDED

Ratings

- •E27
- Downlight and uplight
- •Surface installation over holes •Supply voltage ~220-240V
- •Switch mode: on-off
- Steel frame
- Opalescent diffuser

Product code composition

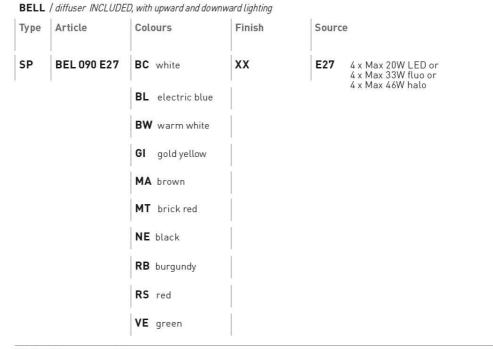

(€ ⊕ IP20 +LED

example composition code SP BEL090E27 BW XX

Available colors

Ø 90 cm



EELc (Energy Efficiency Label compatibility): E, D, C, B, A, A+

CUSTOMER NOTES SPBEL090E27__XX

NOTICE:

Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.