

LINUS

13-July-2016



1.0	
LED 8W 220-240VAC 50-60Hz COB 2-step incl. power supply	
CE IP65 0.3m	
3000K >80CRI 320lm	
dark grey texture	726173D4
dark brown texture	726173Y4

2.0	
LED 8W 220-240VAC 50-60Hz COB 2-step incl. power supply	
CE IP65 0.3m	
3000K >80CRI 300lm opal glass	
dark grey texture	726273D4
dark brown texture	726273Y4

3.0	
LED 8W 220-240VAC 50-60Hz COB 2-step incl. power supply	
CE IP65 0.3m	
3000K >80CRI 300lm	
dark grey texture	726373D4
dark brown texture	726373Y4


ALWAYS USE	
dark grey base 150	910024D0
dark brown base 150	910024Y0
dark grey base 350	910026D0
dark brown base 350	910026Y0
dark grey base 550	910028D0
dark brown base 550	910028Y0
OPTIONAL	
ground spike	90013103
ground fixation	90013302

dimensions base plate / ground spike / ground fixation

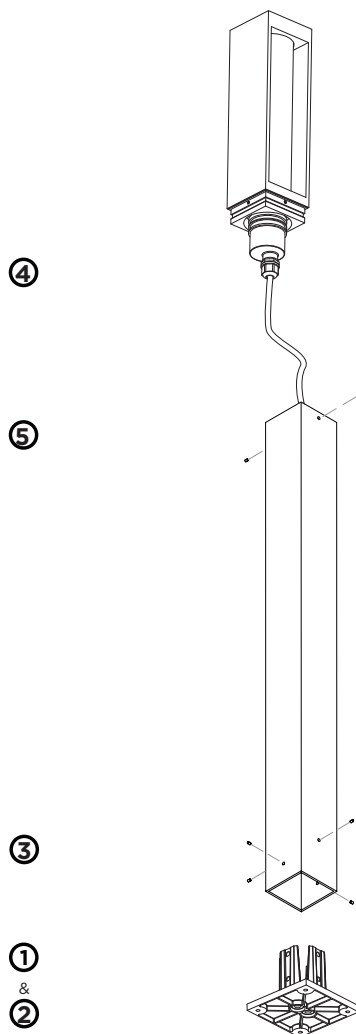

* DO NOT COVER BASE (moss, bark, ...).
Permanent moisture & possible chemical processes from eg.
fertilization might lead in some combinations to a corrosive reaction.

DIMENSIONS

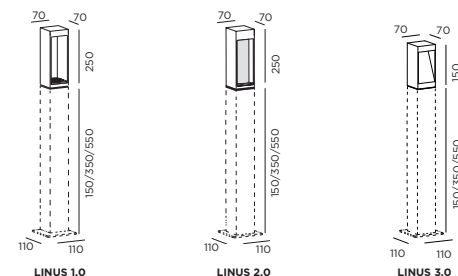


MOUNTING INSTRUCTION

- 1 Remove the base plate
- 2 Fixate the base plate to the ground or ground spike/ground fixation with screws.
- 3 Fixate the base fixture to the base plate


POWER CONNECTION

- 4 Connect the wires with the waterproof connections.

applicable to LINUS 1.0 & 2.0




applicable to LINUS 3.0



- 5 Attach the LINUS on the base by using the side screws

OPTIONAL, (ORDER SEPARATELY)
ground spike



OPTIONAL, (ORDER SEPARATELY)
ground fixation

