

# STRANGE PETIT

## 3.0

17 - Apr.-2018

### 3.0 LED

**LED** 3x6W | 350mA | COB 3-step | excl. power supply

CE IP20 10.3m 31° 25°/25° 355°

white texture	163361W
black texture	163361B

#### LIGHT COLOUR

2700K   >90CRI   3x460lm   18V	3
3000K   >90CRI   3x490lm   18V	5
1800-2700K   >95CRI   3x330lm   15V	9


#### ALWAYS USE

plastic plaster kit	
white	90017206
black	90017207
aluminium plaster kit	
aluminium	90017208




for power supplies see our catalogue

plaster kit (has to be ordered separately)

90017206 / 90017207  
Plastic plaster kit





90017208  
Aluminium plaster kit

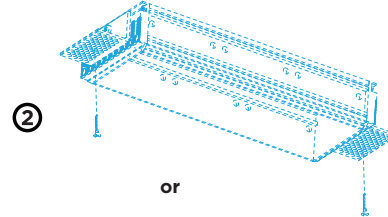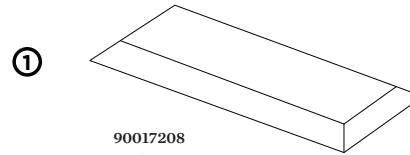


or

90017206 / 90017207

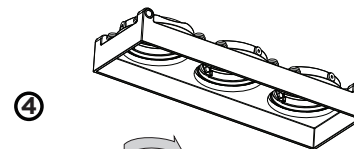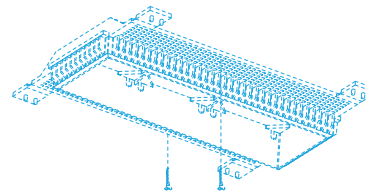

### DIMENSIONS

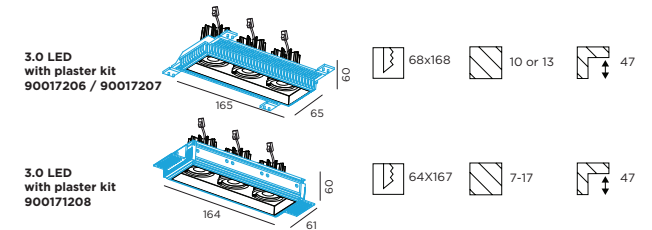


### MOUNTING INSTRUCTION

- ① Make a hole in the ceiling according to the prescribed dimensions (always use a plaster kit)
- ② Click in the upper part of the fixture into the ceiling and plaster the borders seamlessly

### POWER CONNECTION

- ③ SERIAL CONNECTION - for LED  
Always use **POWER SUPPLY** according to the specifications of the LED-module



- ④ Insert the fixture in the upper part & fix LED-modules into the fixture.



WEVER & DUCRÉ  
LIGHTING

www.weverducre.com

Wever & Ducré bvba Spinnerijstraat 99/21 8500 Kortrijk

INSTALLATION  
INSTRUCTIONS

PAGE 1/2

# STRANGE PETIT 3.0 PLASTER KIT


17 - Apr. -2018

plastic plaster kit


white  
black

90017206  
90017207


plaster kit (has to be ordered separately)



NOTE: There are 4 foldable gaskets on the plaster kit.

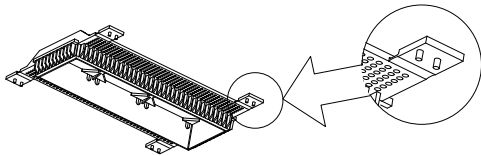


When the thickness of wood board is 13mm, the gasket will be **opened**;

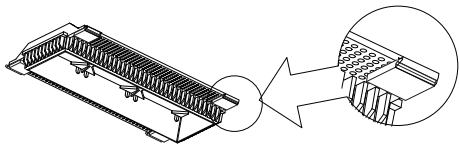


when the thickness of wood board is 10mm, the gasket should be **folded**.

①



②

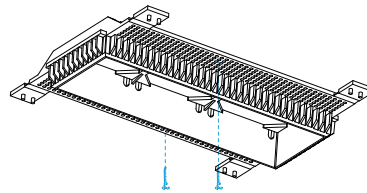

④

