

## CARE FOR YOUR MAT & SPRING PADS

To maximise the life of your mat and safety pads the following maintenance is recommended:

- Ensure to clean any spills as soon as they happen.
- Keep the mat clear of residue – remove leaf litter and twigs from the mat before jumping.
- Wash the mat & pads down with a mild dish washing detergent, rinsing thoroughly with a hose or sprinkler, about once a month.

**Black poly-mesh Mat:**

- Check regularly for tears, fraying around mat wires and mat stitching unraveling - repair as soon as noticed.

**2-String Mat:**

- Paint with a chlorinated, rubber paint every 2-3 years - or when wear spots become evident.
- Check regularly for broken springs and repair as soon as noticed.

**Spring Pads:**

- Apply vinyl conditioner about every 6 months.

## CARE FOR YOUR FRAME & SPRINGS

**Frame:**

- It is important to regularly check for any signs of damage at the joints, the underside of the legs where they make contact with the ground and ensure the frame is sitting level on the ground.

**Springs:**

- Check springs regularly and replace immediately if overstretched, broken or missing.



Congratulations on your purchase of another great Australian product manufactured by Durable Products Australia!

To be part of our success, we invite you to follow us on social media and send through a review. Our goal is to continue to produce multi-generational products with a lifespan of 25+ years.



### contact us

A: Shed 2, 4 Millway Street, Kedron QLD

P: 07 3266 6722

E: [enquiries@durableproducts.com.au](mailto:enquiries@ durableproducts.com.au)

W: [www.durabletrampolines.com.au](http://www.durabletrampolines.com.au)



[www.facebook.com/DPATrampolines](https://www.facebook.com/DPATrampolines)



Proud manufacturers of  
Australian Made Trampolines

# New Trampoline Assembly & Care



# ASSEMBLY VIDEO





## Pre-installation Check:

- Durable Products recommends 2 people for assembly
- Ensure there are no overhead impediments
- Ensure that the ground is as level as possible. If the ground slopes slightly, the long side of the trampoline frame should follow the slope.
- Recommended tools – Rubber mallet, gardening gloves, spring tool.

## FRAME ASSEMBLY

### Assemble your frame:

- Layout frame on the ground.
- Insert the leg sections into the side frame (below). Use a rubber mallet if required.
- Insert dowels into end frames, use a rubber mallet to ensure dowels are fully inserted (below).
- Attach end frames to sides by inserting other end of dowels into the side frames (below).

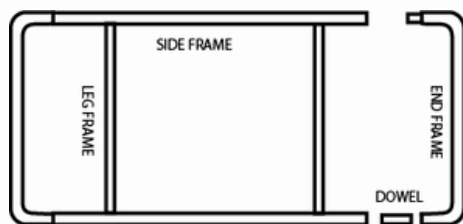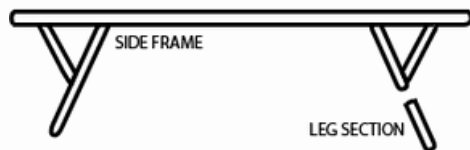

## PREPARE THE MAT


### Insert Mat Wires (black polymesh mats)

#### Method 1 - on the ground:

- Thread the mat wires. Insert into the hole and then wiggle until the kink in the wire aligns with hole.
- Repeat until all mat wires have been inserted. The last one may require some maneuvering.


#### Method 2 - on the frame:

- Thread the mat wires. Start from the 3rd hole away from corner. Push the wire back towards the corner until the kink in the wire aligns with 2nd hole (below).
- *TIP: you can use another wire to help push the first wire along.*
- Repeat until all mat wires have been inserted. The last one may require some maneuvering it will have to be inserted into the hole it is to align with.

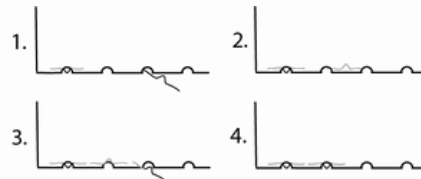

### Hang your mat:

- Connect the 4 corners of the mat to the trampoline frame. Hang the spring from the mat wire by the the small loop and pull to attach to the holes nearest the corners on the frame.

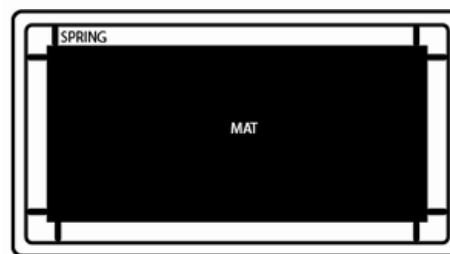

## ATTACH YOUR SPRINGS

### Attach springs:

- Hang the remaining springs on the mat wires (from the small loop).
- Starting in the middle, working in pairs on opposite sides, pull each spring to the frame, working in sync to keep an even tension on the mat while progressing in a straight line.

**IMPORTANT!** Always connect the spring to the mat first and stretch back to the frame, otherwise the mat will be extremely difficult to attach and may become overstretched, skewed or damaged.

## ADD THE SPRING PADS

Once the frame and mat are assembled, the spring safety pads are the last step.

- Lay the pads over the springs along the length and width of the trampoline with the smooth edge facing inwards towards the mat and the sewn seam (with the Velcro strapping) facing outwards.
- Separate each Velcro strip, wrap the soft side (loop) under the trampoline frame pipe from the inside, hold it in place and pull & wrap the rough side (hook) around the soft side so it attaches firmly.
- Wrap the long velcro on the side pads around the end frame and back on itself.
- Ensure joining strips on the side pads are joined to the velcro on the end pads.

Your trampoline is now set up and ready for action!