

Ambience Twin Multi-Link Roller Blind

Product Information

Ambience Twin Multi-Link Roller Blind is an elegant and practical solution for day and night use. Used to operate multiple blinds for larger window spans with a single chain, eliminating unsightly cords. Resulting in better light control, greater privacy, uninterrupted views, and indoor/outdoor accessibility.

Suitable for both Commercial and Residential use.

The system can utilise a combination of any of the Verosol Roller Fabrics – select a blockout fabric for total privacy or a transparent or semi-transparent fabric to provide vision through.

Further Information

To find out more information phone Verosol Customer Care on 1800 721 404 or visit www.verosol.com.au



Technical Information

Product Code R203.0 Product Name Ambience Twin Multi-Link Roller Blind Operation Stainless Steel Chain Operation Dimensions Width 300mm minimum - 3000mm maximum				
Operation Stainless Steel Chain Operation				
Dimensions Width 300mm minimum - 3000mm maximum				
Drop 300mm minimum - 3000mm maximum				
Spring Assist 850mm minimum width				
Maximum Area 15m² over 3 sections				
Roller Tube Light 43mm - optimised for fabric weight and width of blind to reduce tube det	flection			
Standard 44mm - optimised for fabric weight and width of blind to reduce tube det	flection			
Heavy Duty 49mm - optimised for fabric weight and width of blind to reduce tube det	flection			
	Flat [11mm x 22mm], Round [22mm], Verosol [17mm x 28mm] or Elliptical [11mm x 22mm]			
Options Colours Paint: White, Black and Sandstone Anodised: Clear				
Control Mechanism Direct action, high tensol would steel spring which operated in such a wa applies the precise braking power necessary to keep the blind in the desi				
Idler Extendable pin idle-end for easy installation. The idle-end extends up to increments of 1mm for improved installation.	10mm in			
Colours Paint: White, Black, Sandstone and Silver Grey				
Chain PVC, Nickel Plated Steel or Stainless Steel				
Brackets Slim Combo BB Both fabrics are back rolled [controls on same side]				
Slim Combo FB Top fabric is front rolled and bottom fabric is back rolled [controls on san	me side]			
Slimline Combo Top fabric is front rolled and bottom fabric is back rolled [controls on opposition]	posite sides]			
Square Combo Top fabric is front rolled and bottom fabric can be either front or back ro same side]	lled [controls on			
Colours White, Black, Sandstone and Silver Grey				


Ambience Twin Multi-Link Roller Blind

Motorisation

Product Code	R203.6		R203.1	R303.4	
Product Name	Ambience Twin Multi-Link Roller Blind		Ambience Wirefree Twin Multi-Link	Ambience Wirefree Twin Multi-Link	
Operation	240V AC Motorised		15V 12V Wirefree	12 Wirefree Sonesse 30 RTS	
Dimensions	Width	700mm min - 3000mm max	Min Width: 2Nm: 740mm 3Nm: 950mm Max Width: 3000mm	825mm min - 3000mm max	
	Drop	300mm min - 3000mm max	300mm min - 3000mm max	300mm min - 3000mm max	
	Maximum Area	24m² over 3 sections	Maximum Area: 2.0Nm: 8kg 30Nm: 12kg	18m² over 3 sections	
Roller Tube	Light	43mm - optimised for fabric weight and width of blind to reduce tube deflection			
	Standard	44mm - optimised for fabric weight and width of blind to reduce tube deflection			
	Heavy Duty	49mm - optimised for fabric weight and width of blind to reduce tube deflection			


System Diagrams

Ambience Twin Multi-Link Roller Blind

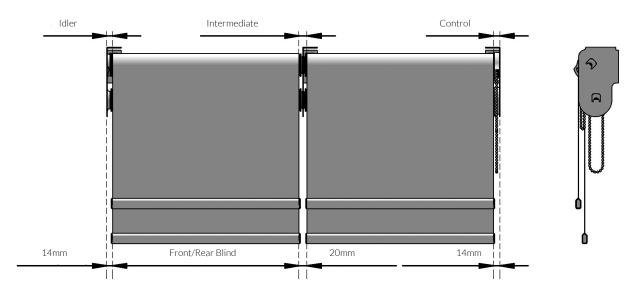

Note: Square Combo brackets are symmetrical. Light gaps on both sides are 14mm as illustrateed abvove [chain op]

Note: Light Gaps will vary by: Bracket type, Chain or Motor operation, and Type of motor selectted. Visit verosol.com.au or call 1800 721 404 for more information.

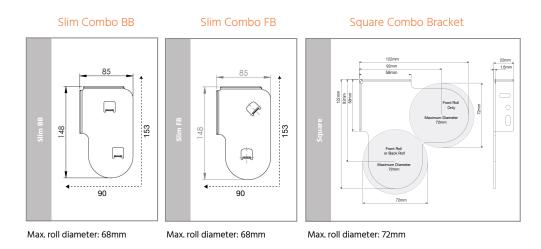

© Copyright 2014 Verosol Australia [ABN 36 006 221 003]