


# CEMB<sup>®</sup> USA

## SM825EVO PA

A traditional swing arm tire changer and great place to start for general service of the majority of OEM fitments and many custom tires and wheels. These durable machines are equipped with basic features, intended for mid-volume use.

[www.cemb-usa.com](http://www.cemb-usa.com)

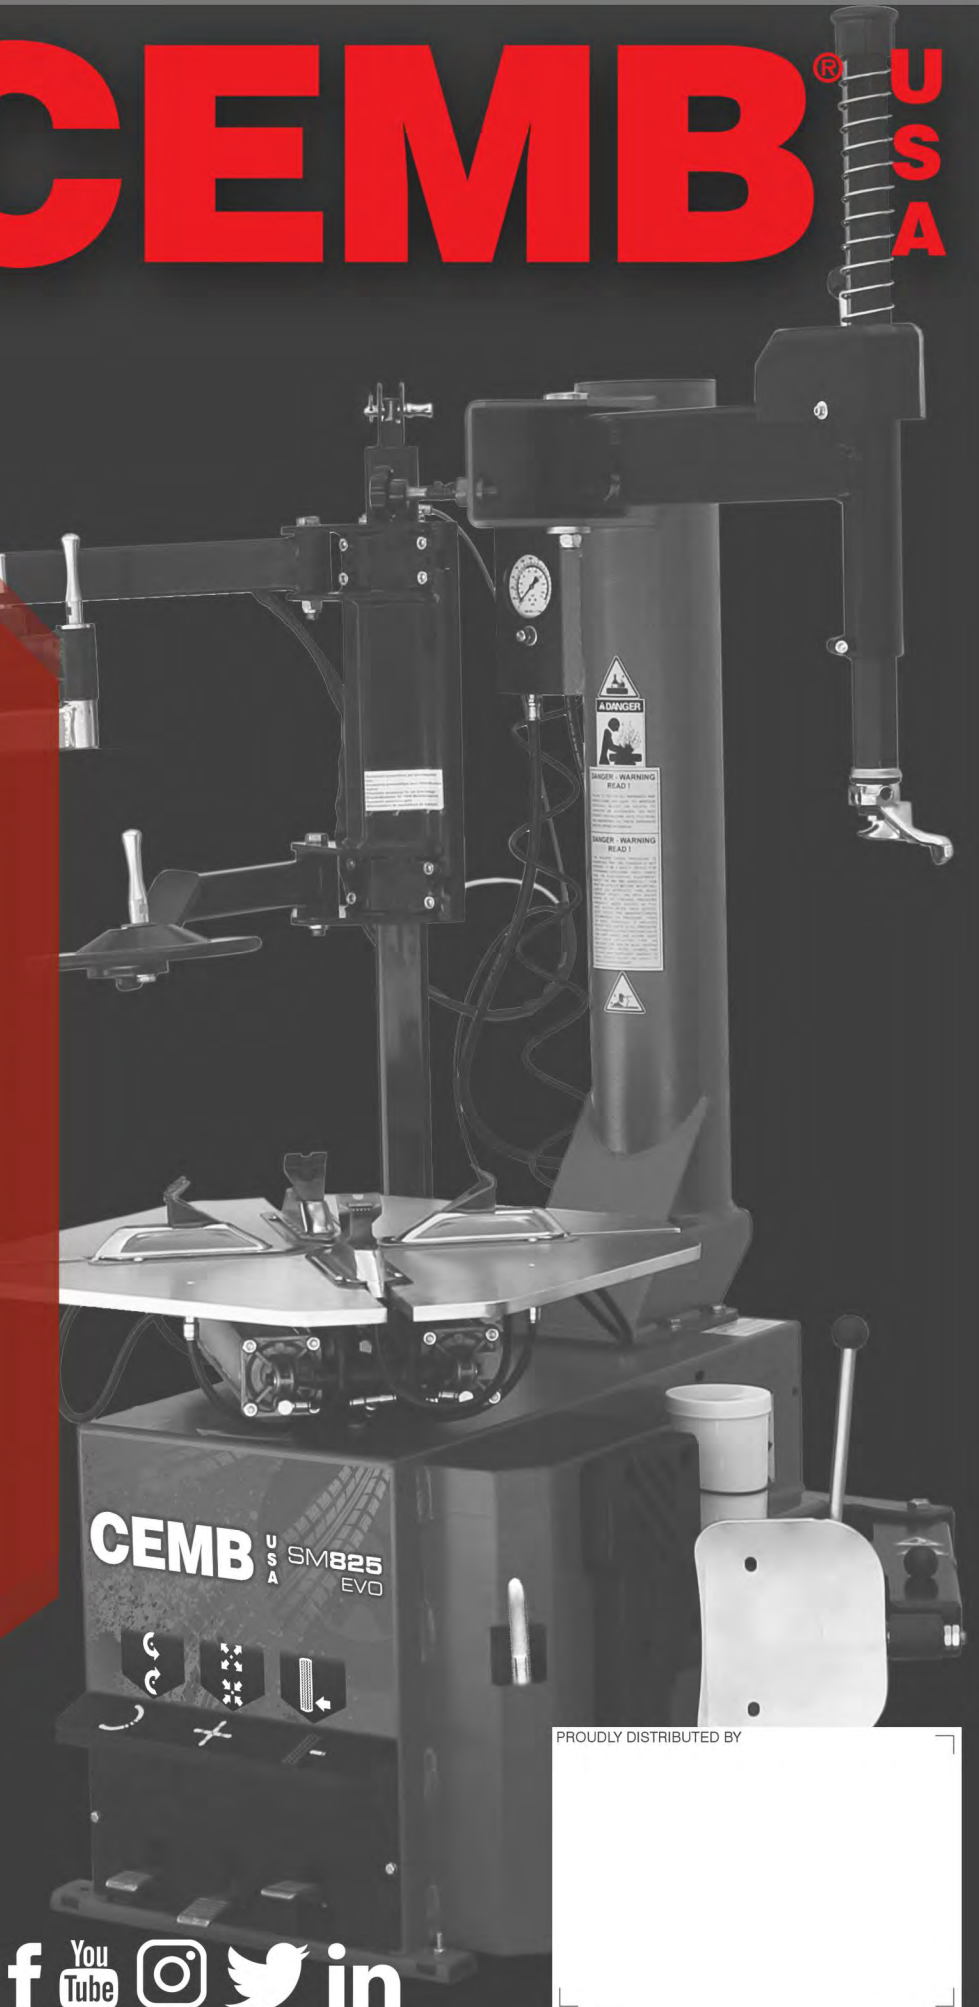

CEMB<sup>USA</sup> SM825 EVO

PROUDLY DISTRIBUTED BY



# SM825EVO PA



## High Performance Press Arm

Provides simple servicing of stiff sidewall tires and deep drop center rims.

## Mounting Head

Custom mount/demount head features replaceable plastic inserts to protect wheels.

## Table Top Clamping

Dual table clamping cylinders with specifications of 13"-26" wheel clamping range.

## Dual Stage Inflation

System with safety limiter and bead blaster built into the clamping jaws.

## Air Powered Optional


Compressed air only powered version also available.

## Bead Breaker Shovel

Foot operated side mounted bead breaker shovel combines speed with power for everyday wheel applications to save time.



## DIMENSIONS



<b>Power Supply:</b>	<b>110V + Air</b>
<b>Air Pressure:</b>	<b>145 psi (10 bar)</b>
<b>Rim Diameter (Ext.):</b>	<b>12" - 24"</b>
<b>Tire Diameter:</b>	<b>44" (1117 mm)</b>
<b>Max. Wheel Width:</b>	<b>15" (380 mm)</b>
<b>Turn Table Speed:</b>	<b>8-15 rpm</b>
<b>Shipping Weight:</b>	<b>630 lbs (286 Kg)</b>

## CONTACT

# CEMB<sup>®</sup> USA

CEMB USA - BL Systems Inc.  
2873 Ramsey Road, Gainesville, GA 30501  
(678) 717-1050 - sales@cemb-usa.com  
www.cemb-usa.com