



HIGH PERFORMANCE

GAS PARRILLA GRILL

LVR 650A



EXAMPLE PHOTO 1M WIDE LVR 650A
WITH REST GRILL

SCHEER CHURRASQUEIRAS
RUA ROQUE CALLEGE, 133 |
CEP 95041-440 | UNIVERSITÁRIO |
CAXIAS DO SUL | RS | BRAZIL

BRAZIL:
+55 54 3224.3066
SCHEER.COM.BR

UNITED STATES:
+1 954 4152161
SCHEERUSA.COM

JAPAN:
+81 3 3280 1035
KYODAIMARKET.COM

AUSTRALIA:
+61 2 9986 2004
PROLINEEQUIPMENT.COM.AU



FEATURES | BENEFITS

SIZES AVAILABLE

- Equipment's length customized according to the customer needs from 1,00m up to 2,00m. See table page 2.

HYGIENE

- Equipment coated in brushed stainless steel AISI 304 or AISI 430 (please specify when ordering).

EASY GAS CONTROL

- Two Hi-Lo gas control with automatic shutoff gas valve and pilot with battery spark ignitor.

LAVA ROCK

- Models can be used with and without Lava Rocks.

BURNERS

- Full 304 Stainless steel burner.

BLACK COLOR OPTIONAL

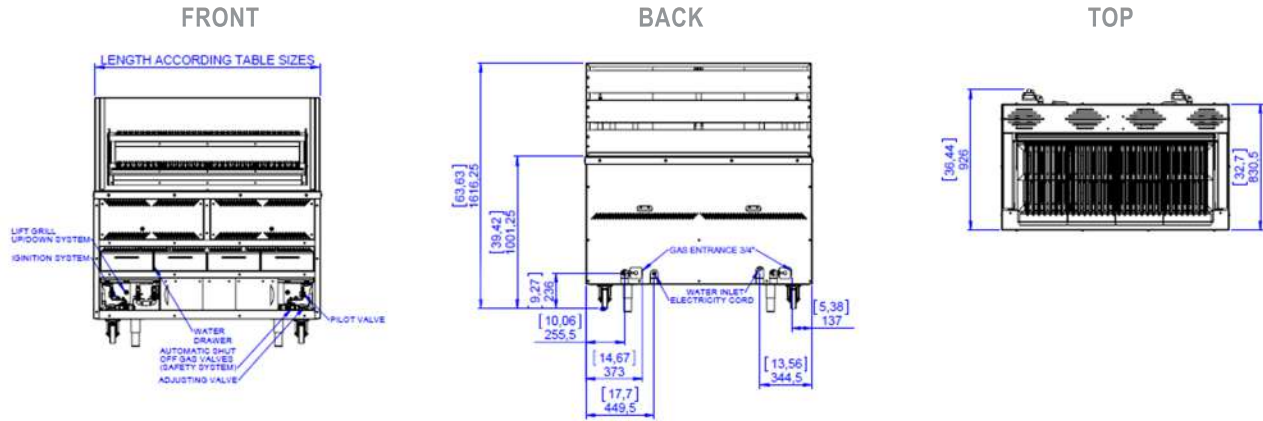
- Black powder coated exterior panels available as an option, use letter "B" at the end of model number.

COOKING LEVELS

- Lift grill side: Parrilla can be lifted for cleaning and cooking heat regulation. Models can be supplied with electric lift motor or manual lift system.

MACHINE STRUCTURE

- Internal frame is heavy duty carbon steel painted square tube frame;
- Lockable casters which helps movement for maintenance and cleaning. Adjustable legs for levelling;
- Water drawer to collect grease;
- Two years parts and labor warranty from date of purchase.


TABLE SIZES (MILIMETERS)

WIDTH	BURNERS	VALVES	ONE SECTION	TWO SECTION
1000mm	10	2	1000mm	500x2
1200mm	12	2	1200mm	600x2
1500mm	16	2	1500mm	750x2
1800mm	18	2	N/A	900X2
2000mm	20	2	N/A	1000X2

*Equipment up to 1500mm has one motor and when is over than 1500mm it has two motors.

UTILITY INFORMATION

GAS

- Machine length up to 1m has one gas inlet, machines length bigger than 1m have two gas inlets.

ELECTRICITY

- This machine requires motor 240VAC -1.2A Power 270W; 50HZ single phase power;
- Electricity consumption 0.27 kWh - 240VAC;
- On/Off switch.

OPTIONAL

- Grid Options: Round bar grill, U Shape Grill or V Shape Grill (carbon steel or stainless steel).

MISCELLANEOUS

- This installation must conform according local codes (AS/NZS 5601). In the absence of local codes, the installation must conform to the National Fuel Gas Code, ANSI Z223.1, Natural Gas Installation Code, CAN/CGA-B149.2, or the Propane Installation Code, CAN/CGA-149.2. For installation under ventilation hood only. The manufacturer is not responsible for installation.

WIDTH	COOKING AREA LENGHT	/	DEPTH
1000mm	800 / 31,49"	/	495,5 / 19,50"
1200mm	1000 / 39,37"	/	495,5 / 19,50"
1500mm	1300 / 51,18"	/	495,5 / 19,50"
1800mm	1600 / 62,99"	/	495,5 / 19,50"
2000mm	1800 / 70,86"	/	495,5 / 19,50"

GAS

DESCRIPTION	NATURAL GAS	UNIVERSAL LPG
1.0m Wide – 10 Burners	186MJ/h (2x93MJ/h burners)	186MJ/h
1.2m Wide – 12 Burners	215MJ/h	215MJ/h
1.5m Wide – 16 Burners	286MJ/h	286MJ/h
1.8m Wide – 18 Burners	322MJ/h	322MJ/h
2.0m Wide – 20 Burners	344MJ/h (2x172MJ/h burners)	344MJ/h

MANIFOLD GAS PRESSURE (teste point on appliance):

Natural Gas: 0.80kPa;

Universal LPG: 2.60kPa;

SUPPLY PRESSURE

Natural Gas: 1 - 1.15 kPa;

Universal LPG: 2.75 kPa