

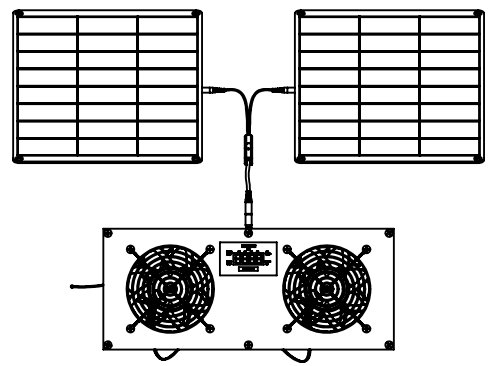


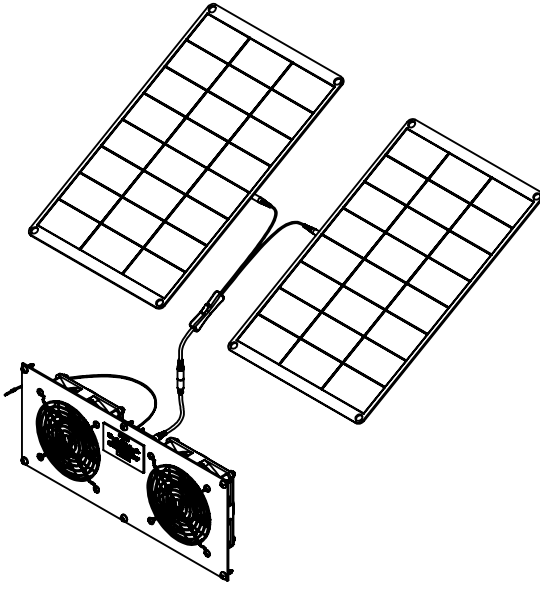



		5		4		3		2		1	
D	ITEM NO.	SKU	DESCRIPTION	QTY.	SOLAR PANEL SPECIFICATIONS						
					SOLAR PANEL SIZE	400X250X2.5mm					
D	1	840556070283	COOLERGUYS 120mm (120X120X38) HIGH SPEED IP67 FAN	2	SOLAR CELL TYPE	MONOCRYSTALLINE	C	7	8	9	10
	2		2510 MOLEX 3 PIN CONNECTOR	2	SOLAR CELL EFFICIENCY	19.80%					
C	3	840556074335	3 WIRE WITH TACHOMETER, LENGTH - 762MM(30IN)	2	MAXIMUM POWER (P _{MAX})	18W	B	11	12	13	14
	4		TWO 18W MONOCRYSTALLINE SOLAR PANELS WITH 12V REGULATOR WITH CONNECTOR CABLE WIRED IN PARALLEL WITH AN ON/OFF SWITCH, WRAPPED IN BUBBLE WRAP WITH CABLE PRE-ATTACHED TO PANELS	2	MAXIMUM POWER CURRENT (I _{MPP})	1.45A					
C	5	840556074335	ON/OFF SWITCH	1	OPTIMUM OPERATING VOLTAGE (V _{MP})	12.4 VDC	B	15	16	17	18
	6		PARALLEL DC5521 MALE CABLE 22AWG 150CM	2	OPEN-CIRCUIT VOLTAGE (V _{OC})	14.4 VDC					
C	7	840556073680	WIRE SWITCH	1	SHORT-CIRCUIT CURRENT(I _{SC})	1.4A	B	19	20	A	A
	8		5.5 X 2.1MM MALE BARREL CONNECTOR	1	DUAL SOLAR PANEL	36W, 12 VDC, 2.6A (MAX)					
B	9	840556073680	5.5 X 2.1MM FEMALE BARREL CONNECTOR	1	WORKING TEMPERATURE	-40°C TO +85°C	A	A	A	A	A
	10		152MM(72IN) BARREL CONNECTOR MALE/FEMALE EXTENSION CABLE	1	JUNCTION BOX RATING	≥IP66					
B	11	840556071976	5.5 X 2.1MM MALE BARREL CONNECTOR	1	DUAL SOLAR PANEL WEIGHT	0.675Kg	A	A	A	A	A
	12		COOLERGUYS PROGRAMMABLE THERMOSTAT CONTROLLER WITH STAGGERED INTERVAL SETTINGS	1	CABLE SPEC	22AWG DC55221 MALE CABLE, USE THE 304 SWITCH, 150cm					
B	13	840556071976	THERMAL PROBE PIN	1	CG12038H12-IP67 840556070283 FAN SPECIFICATIONS		A	A	A	A	A
	14		WATERPROOF AND HIGH HEAT THERMOCOUPLE PROBE	1	DIMENSIONS:	120X120X38MM					
A	15	840556086345	32" WATERPROOF CABLE	1	BEARING SYSTEM:	DUAL BALL BEARING	A	A	A	A	A
	16		COOLCAB2-120 DELUXE WITH THERMAL MONITOR: BRACKET ONLY	1	WIRE OPTION:	3 WIRE WITH TACHOMETER, LENGTH - 762mm (30IN)					
A	17	840556082705	120MM BLACK FAN FINGER GRILL	4	CONNECTOR OPTION:	3PIN 2510 MOLEX (FEMALE HOUSING/MALE PIN)	A	A	A	A	A
	18		(1 - 4 PACKS) BOLTS (MACHINE SCREW) 50MM AND NUTS M4	2	RATED VOLTAGE:	12 VDC					
A	19	840556100355	BLACK MOUNTING SCREWS FOR CABINET BRACKET: #6-13 X 5/8"	6	OPERATING VOLTAGE:	6.9 VDC - 13.8 VDC	A	A	A	A	A
	20		840556092575	BLACK MOUNTING SCREWS FOR CABINET BRACKET: #6-13 X 5/8"	6	RATED OPERATING CURRENT:					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPTIONS:	CLOSED CORNERS					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO +75°C					
					NET WEIGHT:	300G					
					OPERATION TEMPERATURE:	-30°C TO					

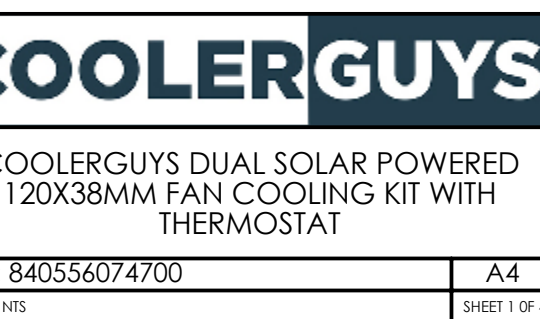

COOLERGUYS

COOLERGUYS DUAL SOLAR POWERED
120X38MM FAN COOLING KIT WITH
THERMOSTAT

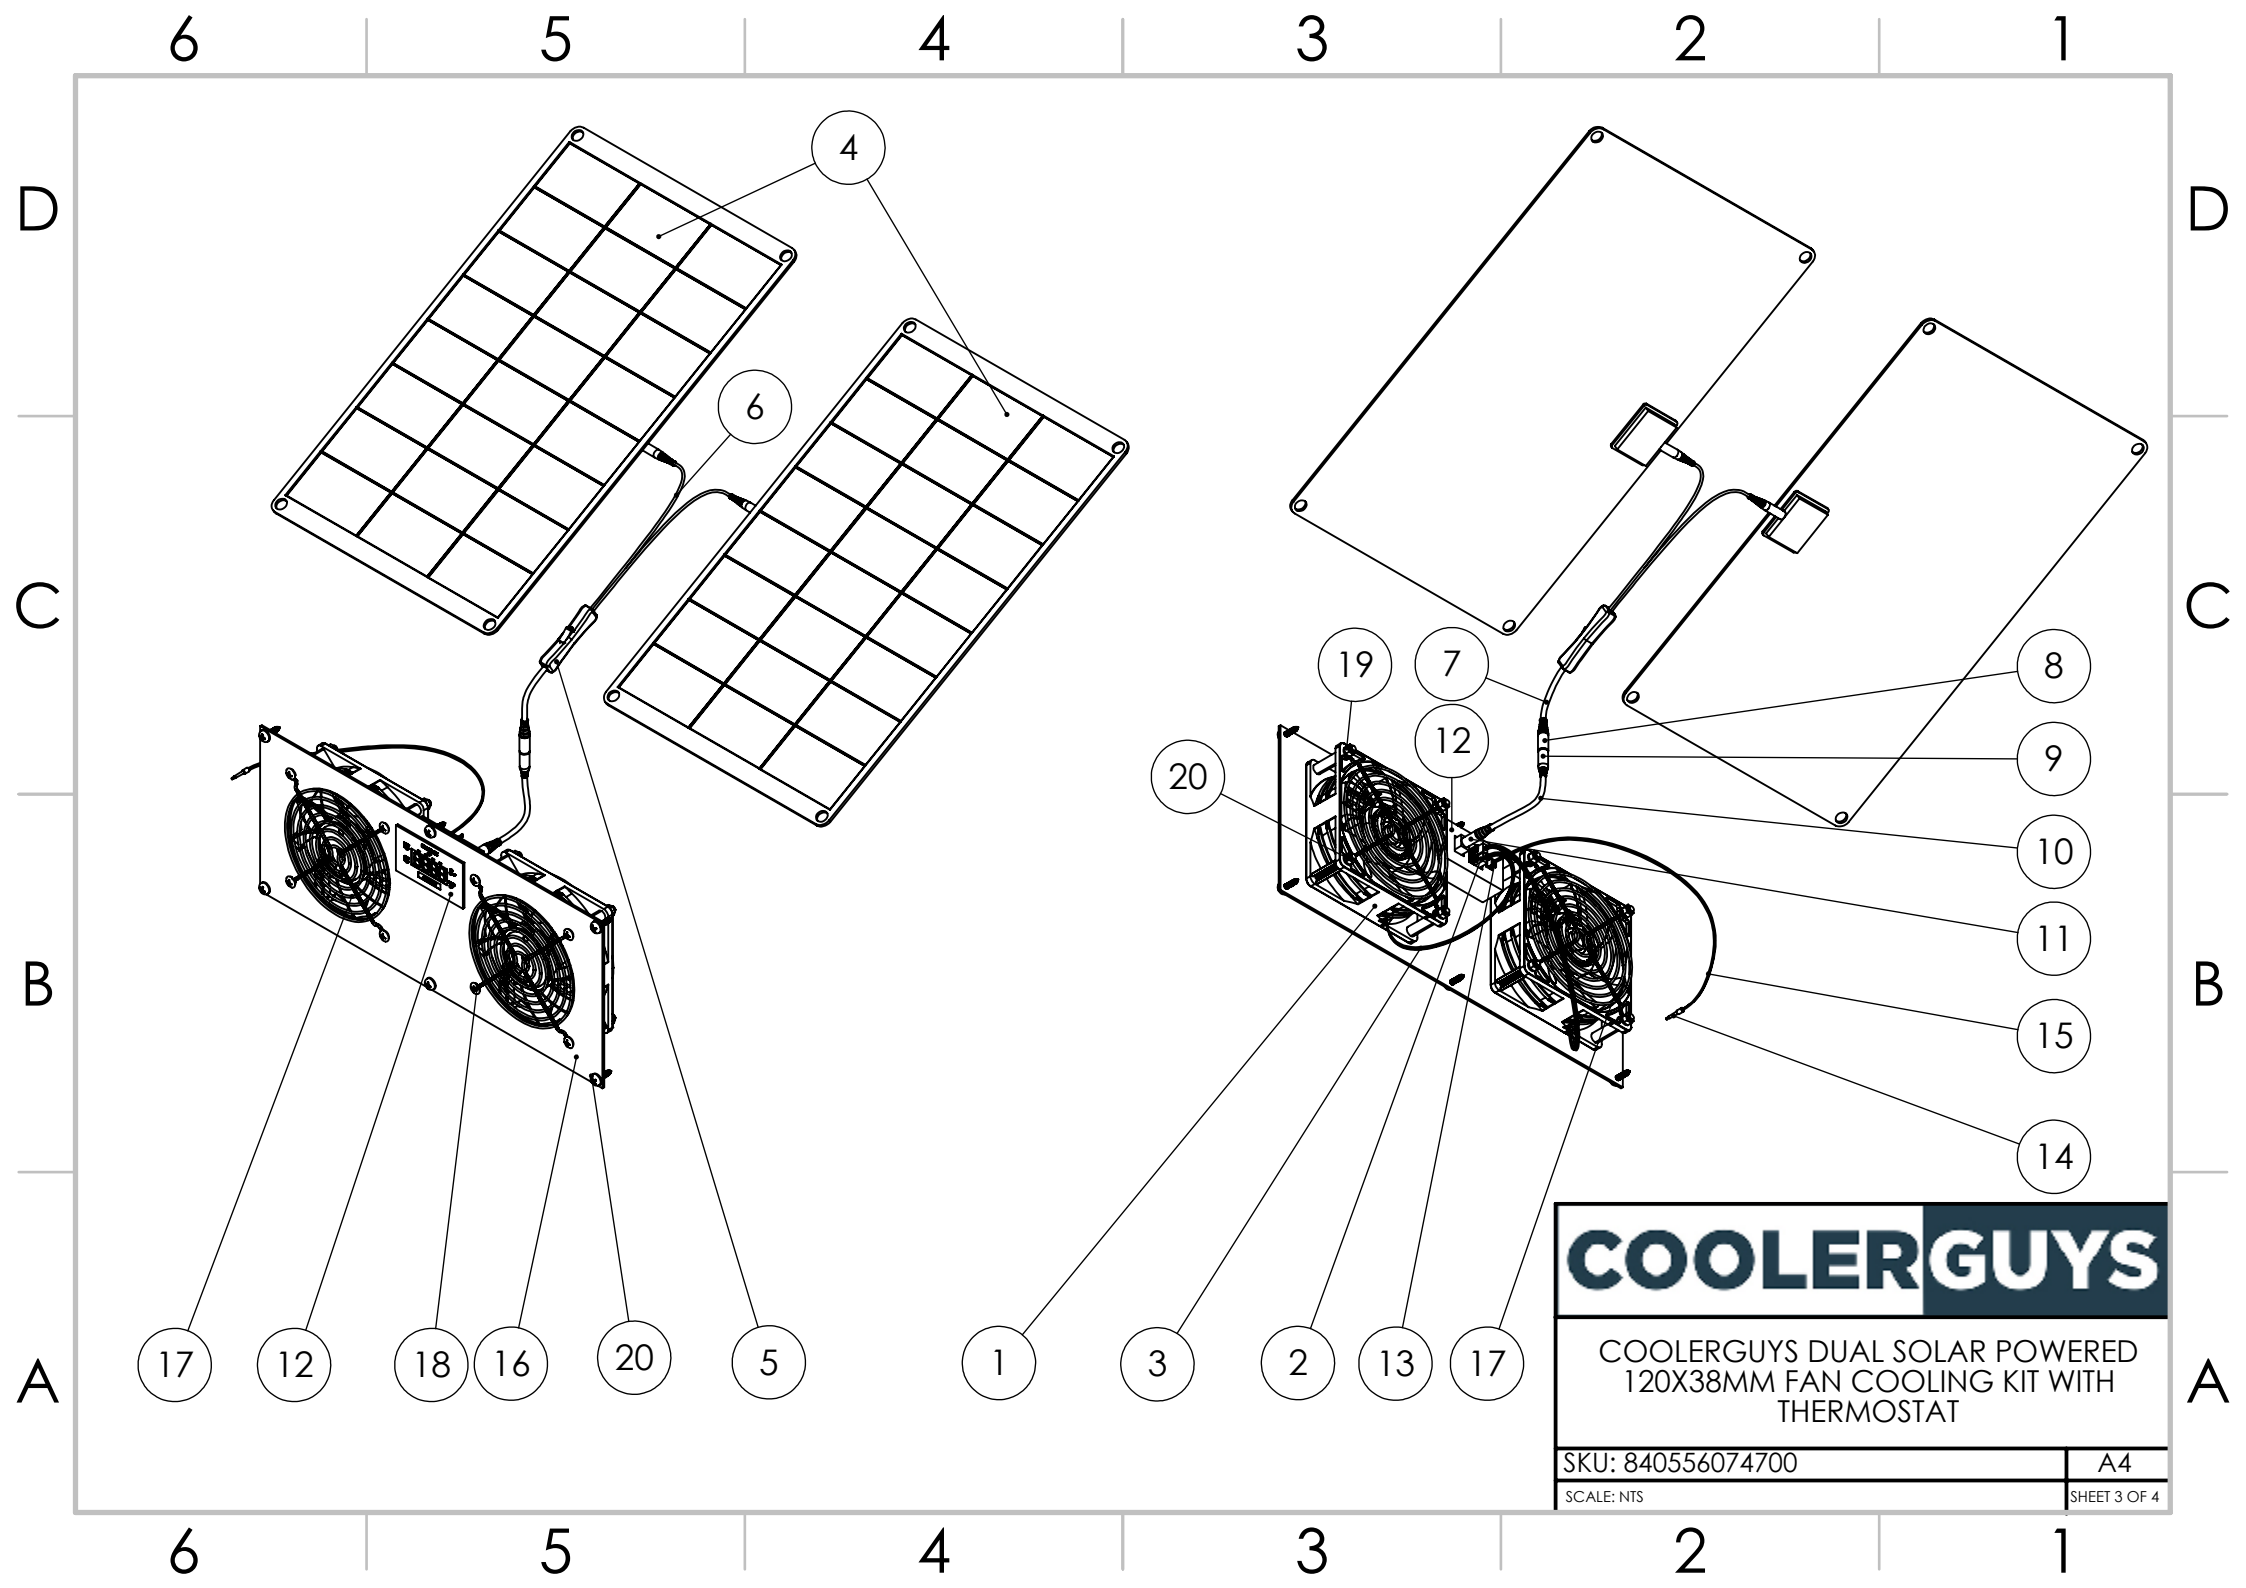SKU: 840556074700	A4
SCALE: NTS	SHEET 3 OF 4

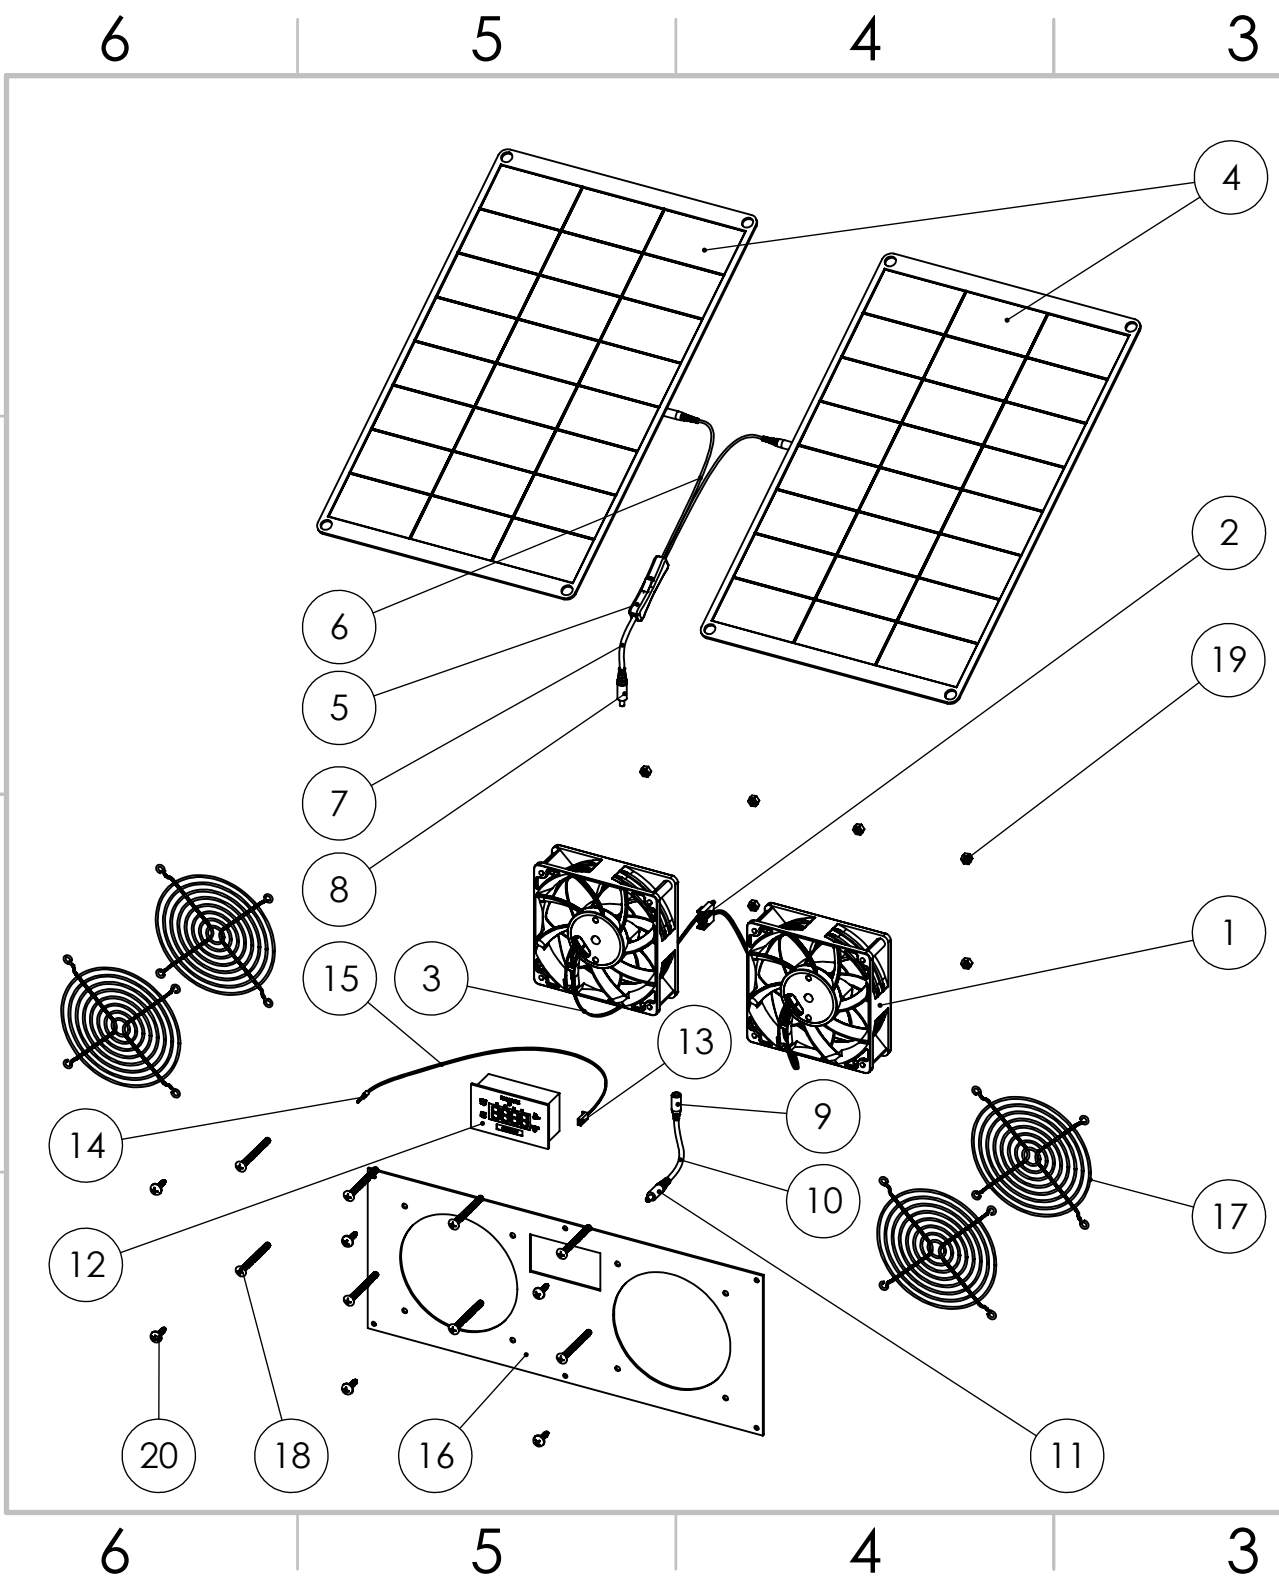

ITEM NO.	SKU	DESCRIPTION	QTY.
1		COOLERGY 120mm (120X120X38) HIGH SPEED IP67 FAN	2
2	840556070283	2510 MOLEX 3 PIN CONNECTOR	2
3		3 WIRE WITH TACHOMETER, LENGTH - 762MM(30IN)	2
4	840556074335	TWO 18W MONOCRYSTALLINE SOLAR PANELS WITH 12V REGULATOR WITH CONNECTOR CABLE WIRED IN PARALLEL WITH AN ON/OFF SWITCH, WRAPPED IN BUBBLE WRAP WITH CABLE PRE-ATTACHED TO PANELS	2
5		ON/OFF SWITCH	1
6		PARALLEL DC5521 MALE CABLE 22AWG 150CM	2
7		WIRE SWITCH	1
8		5.5 X 2.1MM MALE BARREL CONNECTOR	1
9		5.5 X 2.1MM FEMALE BARREL CONNECTOR	1
10	840556073680	152MM(72IN) BARREL CONNECTOR MALE/FEMALE EXTENSION CABLE	1
11		5.5 X 2.1MM MALE BARREL CONNECTOR	1
12		COOLERGY PROGRAMMABLE THERMOSTAT CONTROLLER WITH STAGGERED INTERVAL SETTINGS	1
13	840556071976	THERMAL PROBE PIN	1
14		WATERPROOF AND HIGH HEAT THERMOCOUPLE PROBE	1
15		32" WATERPROOF CABLE	1
16	840556086345	COOLCAB2-120 DELUXE WITH THERMAL MONITOR: BRACKET ONLY	1
17	840556082705	120MM BLACK FAN FINGER GRILL	4
18	840556100355	(1 - 4 PACKS) BOLTS (MACHINE SCREW) 50MM AND NUTS M4	2
19			
20	840556092575	BLACK MOUNTING SCREWS FOR CABINET BRACKET: #6-13 X 5/8"	6

COOLERGY

COOLERGY DUAL SOLAR POWERED 120X38MM FAN COOLING KIT WITH THERMOSTAT

SKU:840556074700 A4

SCALE: NTS SHEET 4 OF 4