
PRODUCT SPECIFICATION SHEET

Conduit & Cable Adhesive Markers

Kolbi adhesive markers are constructed of durable premium grade, outdoor vinyl to withstand exposure to harsh elements. The permanent, pressure sensitive adhesive will adhere to most clean/dry surfaces and stay there for many years. All markers are constructed for easy removal from the liner to speed up installation. Markers comply with ASME A13.1-2015 "Scheme for the Identification of Piping Systems" (see reverse side) when used with Arrow Banding Tape or Individual Arrow Markers.

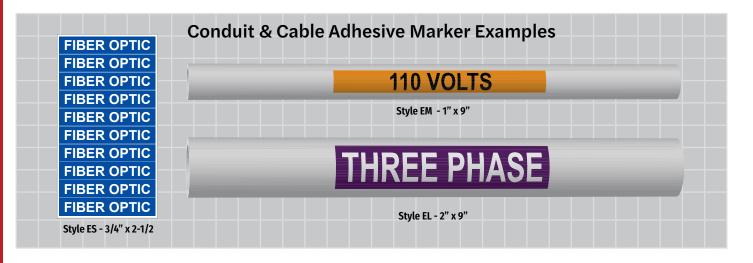

Marker Size Reference

Style	Marker Size	Letter Size	
ES (sm)	3/4" x 2-1/2" (10 per sheet)	1/2"	
EM (med)	1" x 9"	3/4"	
EL (lg)	2" x 9"	1-1/4"	

Color Combinations

WHITE	WHITE		
WHITE	BLACK		
BLACK	WHITE		
BLACK	Additional colors available		

Standards Met	ANSI/ASME A13.1-2015 "Scheme for Identification of Piping Systems" ANSI Z535.1 "Safety Color Code"				
Installation Instructions	Applied to a clean dry surface above 32°F (0°C)				
Service Temp	-40°F to 176°F (-40°C to 80°C)				
Water Resistance	Good, Product has passed submersion tests				
Finish	High Gloss				
Material Properties	4 Mil vinyl with pressure sensitive adhesive backing				
	Aggressive permanent acrylic adhesive				
Adhesive Properties	Stainless Steel: 54 oz/in (594 N/m)	Acrylic: 56 oz/in (616 N/m)			
	Glass: 53 oz/in (599 N/m)	Polypropylene: 51 oz/in (561 N/m)			
	Expected Shear: 5 hours	Tack: gm (740)			
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish				
Storage Stability	2 years stored at 70°F (21°C) and 50% RH				
Outdoor Durability	4 to 6 years				
Abrasion Resistance	Good				
Chemical Resistance	Resistant to Acids, Alkalis and Salts				
Equivalent To	Electromark Labels, Marker Services Conduit and Cable Markers, Brimar Voltage Markers				

DATE _	/	/	/	JOB		
	MM	DD	YYYY	·		
CONTR	ACTOR NAM	ΛΕ				