


Kolbi adhesive markers are constructed of durable premium grade, outdoor vinyl to withstand exposure to harsh elements. The permanent, pressure sensitive adhesive will adhere to most clean/dry surfaces and stay there for many years. All markers are constructed for easy removal from the liner to speed up installation. Markers comply with ASME A13.1-2015 "Scheme for the Identification of Piping Systems" (see reverse side) when used with Arrow Banding Tape or Individual Arrow Markers.

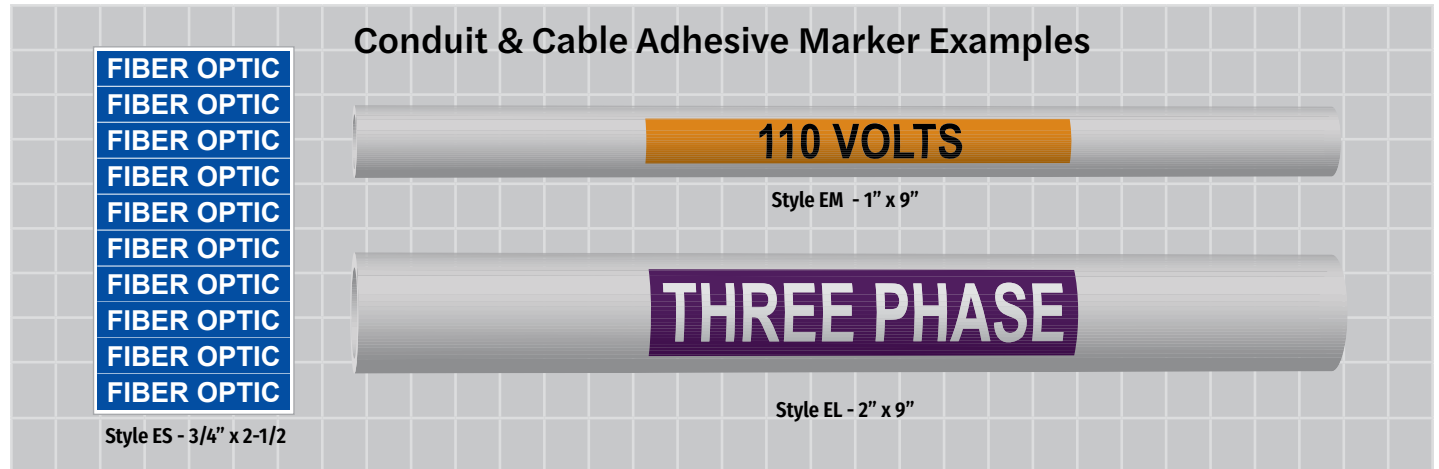

Marker Size Reference

Style	Marker Size	Letter Size
ES (sm)	3/4" x 2-1/2" (10 per sheet)	1/2"
EM (med)	1" x 9"	3/4"
EL (lg)	2" x 9"	1-1/4"

Color Combinations

WHITE	WHITE
WHITE	BLACK
BLACK	WHITE
BLACK	Additional colors available

Standards Met	ANSI/ASME A13.1-2015 "Scheme for Identification of Piping Systems" ANSI Z535.1 "Safety Color Code"	
Installation Instructions	Applied to a clean dry surface above 32°F (0°C)	
Service Temp	-40°F to 176°F (-40°C to 80°C)	
Water Resistance	Good, Product has passed submersion tests	
Finish	High Gloss	
Material Properties	4 Mil vinyl with pressure sensitive adhesive backing	
Adhesive Properties	Aggressive permanent acrylic adhesive	
	Stainless Steel: 54 oz/in (594 N/m)	Acrylic: 56 oz/in (616 N/m)
	Glass: 53 oz/in (599 N/m)	Polypropylene: 51 oz/in (561 N/m)
	Expected Shear: 5 hours	Tack: gm (740)
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish	
Storage Stability	2 years stored at 70°F (21°C) and 50% RH	
Outdoor Durability	4 to 6 years	
Abrasion Resistance	Good	
Chemical Resistance	Resistant to Acids, Alkalis and Salts	
Equivalent To	Electromark Labels, Marker Services Conduit and Cable Markers, Brimar Voltage Markers	

DATE	MM	DD	YYYY	JOB
CONTRACTOR NAME				