
PIPE MARKER CO. PRODUCT SPECIFICATION SHEET



Kolbi Banding Tape is the preferred method for installing adhesive pipe markers and meeting standards for marking directional flow. The permanent pressure sensitive adhesive easily attaches to clean dry surfaces. The tape provides 360 degree visibility around pipes and extra adhesion to pipes in any condition.

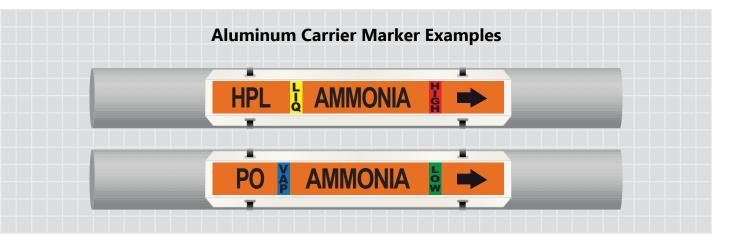

Kolbi Style	Pipe Outer Diameter		Carrier Dimensions		Letter Height	
САВ	1-3/8" - 2"	34.925mm - 50.8mm	3-1/2"x20"	88.90mm x 508mm	3/4"	19mm
CAC	2-1/8" - 7"	53.975mm - 177.8mm	3-1/2"x20"	88.90mm x 508mm	1-1/4"	32mm
CAD	7-1/8" - 10"	180.975mm - 254mm	4-7/8"X26"	101.6mm x 660.4	2-1/2"	64mm
CAE	Over 10"	254mm +	6-3/16"X33"	152.4mm x 838.2	3-1/2"	88.90mm

Standards Met	ANSI/ASME A13.1-2015 "Scheme for Identification of Piping Systems" ANSI Z535.1 "Safety Color Code" & IIAR Standards for Ammonia Pipe Labeling			
Installation Instructions	Strapped on to pipe with self locking stainless steel straps			
Service Temp	-70°F to 300°F			
Water Resistance	Good, Product has passed submersion tests			
Finish	High Gloss			
Label Properties	2 mil Polyester label with 2 mil chemical and UV resistant overlaminate			
Aluminum Carrier Properties	Crack resistant powder coated aluminum carrier			
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish			
Storage Stability	Indefinite at 70°F (21°C) and 50% RH			
Outdoor Durability	5 to 7 years			
Chemical Resistance	Resistant to Acids, Alkalis and Salts			
Equivalent To	Marking Services Carrier Markers, Brimar Carrier Markers			

Project

MM

CONTRACTOR NAME

JOB