
Engraved Plastic Valve Tags are the most versatile tags available. Multiple color options are available for easy recognition. Engraving allows for variation in font size and style, along with an increased number of characters. Available in five material options: Standard 1/16" indoor, 1/8" indoor, 1/8" outdoor, 1/8" double-sided, and 1/16" phenolic.

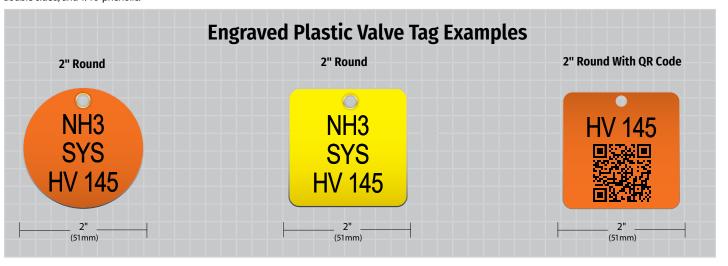

Tag Sizes	Top Line	Middle Line	Bottom Line
1-1/2" Round	1/4" (5 Characters)	N/A	1/2" (3 Characters)
1-1/2" Square	1/4" (5 Characters)	N/A	1/2" (3 Characters)
2" Round	1/4" (6 Characters)	1/4" (8 Characters)	1/2" (4 Characters)
2" Square	1/4" (6 Characters)	1/4" (8 Characters)	1/2" (4 Characters)
2" Octagon	1/4" (6 Characters)	1/4" (8 Characters)	1/2" (4 Characters)
*Size text to fit option available			

Accessories	
No.6 Brass	Beaded Chain
No. 16 Bra	ass Jack Chain
Brass S H	ooks
Zinc Hoo	ks
Nylon Tie	25

	BLAC	K/YELLOW
Cod	es	
	Barcode	
	QR Code	

BLACK/ORANGI

Colors

HOLE SIZE	1/8' Hole with Stainless Steel Grommets
SERVICE TEMP	-40°F to 200°F (-40°C to 93°C)
WATER RESISTANCE	Good
FINISH	Matte
MATERIAL PROPERTIES	Impact Acrylic
MATERIAL OPTIONS	1/16"(1.6mm), 1/8"(3mm) , 3PLY (DOUBLE SIDED)
UV RESISTANT OPTION:	UV Resistant option available for some colors
INSTALLATION OPTIONS	Adhesive backing, Holes and Adheisve Backing, Magnetic backing
STORAGE STABILITY	Indefinite when stored at 70°F (21°C) and 50% RH
OUTDOOR DURABILITY	4 - 6 Years (UV Resistant Material 15+ years)
CHEMICAL RESISTANCE:	Resistant to Acids, Alkalis and Salts
EQUIVALENT TO:	Seton Setonflex, Brimar Briply, Marking Services Inc. MS-264






Pipe Marker Co.

PRODUCT SPECIFICATION SHEET

Stainless Steel Valve Tags

These tags are made from high quality Type 316 stainless steel which is deburred and polished for a professional and durable finish. Laser etching provides a highly detailed and lasting image for text, bar codes and QR codes.

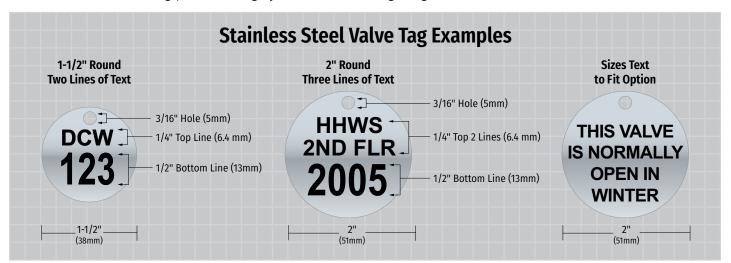

Tag Sizes	Top Line	Middle Line	Bottom Line
1-1/2" Round	1/4" (5 Characters)	N/A	1/2" (3 Characters)
1-1/2" Square	1/4" (5 Characters)	N/A	1/2" (3 Characters)
2" Round	1/4" (6 Characters)	1/4" (8 Characters)	1/2" (4 Characters)
2" Square	1/4" (6 Characters)	1/4" (8 Characters)	1/2" (4 Characters)
2" Octagon	1/4" (6 Characters)	1/4" (8 Characters)	1/2" (4 Characters)

Accessories	
No. 6 SS Beaded Chain	
No. 16 SS Jack Chain	
Stainless Steel S Hooks	
Zinc Hooks	
Nylon Ties	
For other options refer to the Accessories Spec Sheet	

Co	Codes	
	Barcode	
	QR Code	

Standards Met	ANSI/ASME A13.1-2015 Standards
Installation Instructions	Hang from valve stem or valve handle
Temperature Resistance	Up to 2700°F (1482°C)
Water Resistance	Excellent
Finish	Brush natural stainless steel
Material Properties	22 Gauge (.030in/0.762mm thick) 316 stainless steel
Material Options	Other grades and finished of stainless steel available
Text	Laser etched dark grey to black finish
Storage Stability	Indefinite
Outdoor Durability	Excellent
Chemical Resistance	Excellent
Hole	3/16" Top Hole
Equivalent To	Marking Services Inc. Stainless Steel Tags, Seton Stainless Steel Valve tags, Brimar Stainless Steel Valve tags, Brady Stainless Steel Valve Tags

