
KOLBI Pipe Marker Co.

PRODUCT SPECIFICATION SHEET

Arrow Banding Tape

Kolbi Arrow Banding Tape is the preferred method for installing adhesive pipe markers and meeting standards for marking directional flow. The permanent pressure sensitive adhesive easily attaches to clean dry surfaces. The tape provides 360 degree visibility around pipes and extra adhesion to pipes in any condition.

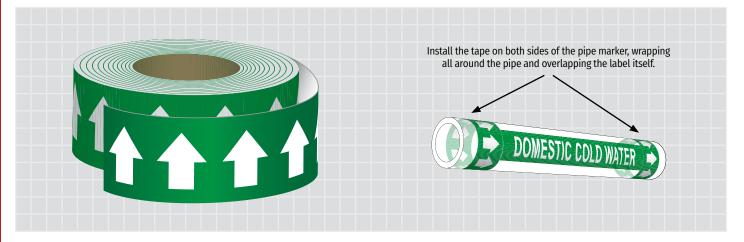

Kolbi Style	Pipe OD (Including Insulation)	Tape Size	Arrow Size
1" A (25.4mm)	Less than 1-1/4" (31.75mm)	1" X 30 yards (25.4mm x 27.43m)	1/2" (12.7mm)
1" B (25.4mm)	1-1/2" - 2-1/4" (38.1mm - 57.15mm)	1" X 30 yards (25.4mm x 27.43m)	3/4" (19.05mm)
2" C (50.8mm)	2-1/2" - 7-7/8" (63.5mm - 200.03mm)	2" X 30 yards (50.8mm x 27.43m)	1-1/4" (31.75mm)
3" D (76.2mm)	8" - 10" (203.2mm - 254mm)	3" X 30 yards (76.2mm x 27.43m)	2-1/2" (63.5mm)
4" E (101.6mm)	10" + (254mm +)	4 " X 30 yards (101.6mm x 27.43m)	3-1/2" (88.9mm)



Standards Met	ANSI/ASME A13.1-2015 Scheme for Identification of Piping Systems ANSI Z535.1 Safety Color Code			
Installation Instructions	Applied to a clean dry surface above 32°F (0°C)			
Service Temp	-40°F to 176°F (-40°C to 82.22°C)			
Water Resistance	Good, product has passed submersion tests			
Finish	High gloss			
Material Properties	4 mil vinyl with pressure sensitive adhesive backing			
	Aggressive permanent acrylic adhesive			
Adhesive Properties	Stainless Steel: 54 oz/in (594 N/m)	Acrylic: 56 oz/in (616 N/m)	Glass: 53 oz/in (599 N/m)	
	Polypropylene: 51 oz/in (561 N/m)	Expected Shear: 5 hours	Tack: gm (740)	
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish			
Storage Stability	2 years stored at 70°F (21°C) and 50% RH			
Outdoor Durability	4 to 6 years			
Abrasion Resistance	Good			
Chemical Resistance	Resistant to Acids, Alkalis and Salts			
Equivalent To	Marking Services MS-900 Arrow Tape, Seton Arrows-On-a-Roll Tape, Brimar EZ Arrow banding tape, Brady Arrow Tape			

