
KOLBIPRODUCTPIPE MARKER CO.SPECIFICATION SHEET

Blank Banding Tape

Kolbi Banding Tape is the preferred method for installing adhesive pipe markers and meeting standards for marking directional flow. The permanent pressure sensitive adhesive easily attaches to clean dry surfaces. The tape provides 360 degree visibility around pipes and extra adhesion to pipes in any condition.

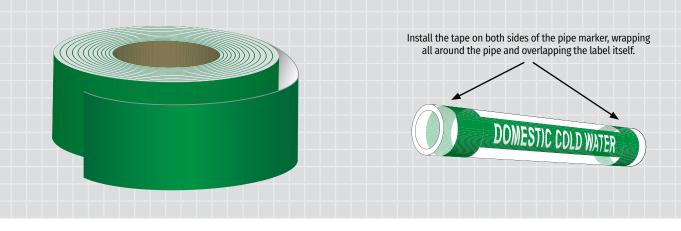

Kolbi Style	Pipe OD (Including Insulation)	Tape Size	Standard Colors
1" A (25.4mm)	Less than 1-1/4" (31.75mm)	1" X 30 yards (25.4mm x 27.43m)	
1" B (25.4mm)	1-1/2" - 2-1/4" (38.1mm - 57.15mm)	1" X 30 yards (25.4mm x 27.43m)	
2" C (50.8mm)	2-1/2" - 7-7/8" (63.5mm - 200.03mm)	2" X 30 yards (50.8mm x 27.43m)	
3" D (76.2mm)	8" - 10" (203.2mm - 254mm)	3" X 30 yards (76.2mm x 27.43m)	
4" E (101.6mm)	10" + (254mm +)	4 " X 30 yards (101.6mm x 27.43m)	Custom colors available upon request

Standards Met	ANSI/ASME A13.1-2015 Scheme for Identification of Piping Systems ANSI Z535.1 Safety Color Code				
Installation Instructions	Applied to a clean dry surface above 32°F (0°C)				
Service Temp	-40°F to 176°F (-40°C to 82.22°C)				
Water Resistance	Good, product has passed submersion tests				
sh High gloss					
Material Properties	4 mil vinyl with pressure sensitive adhesive backing				
	Aggressive permanent acrylic adhesive				
Adhesive Properties	Stainless Steel: 54 oz/in (594 N/m)	Acrylic: 56 oz/in (616 N/m)	Glass: 53 oz/in (599 N/m)		
	Polypropylene: 51 oz/in (561 N/m)	Expected Shear: 5 hours	Tack: gm (740)		
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish				
Storage Stability	2 years stored at 70°F (21°C) and 50% RH				
Outdoor Durability 4 to 6 years					
Abrasion Resistance	on Resistance Good				
Chemical Resistance	Resistant to Acids, Alkalis and Salts				
Equivalent To	Marking Services MS-900 banding tape, Seton Banding Tape, Brimar banding tape, Brady banding Tape				

Project

Physical Properties

DATE _____

JOB

CONTRACTOR NAME