


These tags are made from high quality Type 316 stainless steel which is deburred and polished for a professional and durable finish. Laser etching provides a highly detailed and lasting image for text, bar codes and QR codes.

Anodized Aluminum Valve Tag Examples


1-1/2" Round
Two Lines of Text



1-1/2" (38mm)

3/16" Hole
1/4" Top Line (6.4)
1/2" Bottom Line

2" Round
Three Lines of Text



2" (51mm)

3/16" Hole
1/4" Top 2 Lines (6.4 mm)
1/2" Bottom Line

Sizes Text
to Fit Option



2" (51mm)

Product Specifications

Tag Sizes	Top Line	Middle Line	Bottom Line
1-1/2" Round	1/4" (5 Characters)	N/A	1/2" (3 Characters)
1-1/2" Square	1/4" (5 Characters)	N/A	1/2" (3 Characters)
2" Round	1/4" (6 Characters)	1/4" (8 Characters)	1/2" (4 Characters)
2" Square	1/4" (6 Characters)	1/4" (8 Characters)	1/2" (4 Characters)
2" Octagon	1/4" (6 Characters)	1/4" (8 Characters)	1/2" (4 Characters)

Accessories
No. 6 Brass Beaded Chain
No. 16 Brass Jack Chain
Brass S Hooks
Zinc Hooks
Nylon Ties

Colors
WHITE/BLACK
WHITE/GOLD
WHITE/RED
WHITE/BLUE
WHITE/ORANGE
WHITE/GREEN
WHITE/ALUMIN
BLACK/ALUMIN

*For other options refer to the Accessories Spec Sheet

Physical Properties


Installation Instructions	Hang from valve stem or valve handle
Service Temp	-200°F to 1400°F (-128°C to 760°C)
Water Resistance	Excellent
Finish	Brushed gloss
Material Properties	20 Gauge (0.032"/0.812 mm thick) anodized aluminum
Text	Laser etched white finish, *digital print for black text
Hole	3/16" Top hole
Storage Stability	Indefinite when stored at 70°F (21°C) and 50% RH
Outdoor Durability	Excellent
Chemical Resistance	Excellent
Equivalent To	Marking Services Inc. Anodized Aluminum Tags, Brimar Laser Etched Anodized Aluminum Valve Tags, Seton Custom Etched Anodized Aluminum Valve Tags, Brady Anodized Aluminum Valve Tags

Project

DATE _____ / _____ / _____ JOB _____
MM DD YYYY

CONTRACTOR NAME _____

Kolbi stamped brass valve tags are the most requested valve tags in construction specifications. Made of highly durable .036" (19 gauge) brass, deep stamped and blacked filled for easy readability. Standard sizes are 1-1/2" and 2" and available with standard system abbreviations or custom to meet specific project requirements.

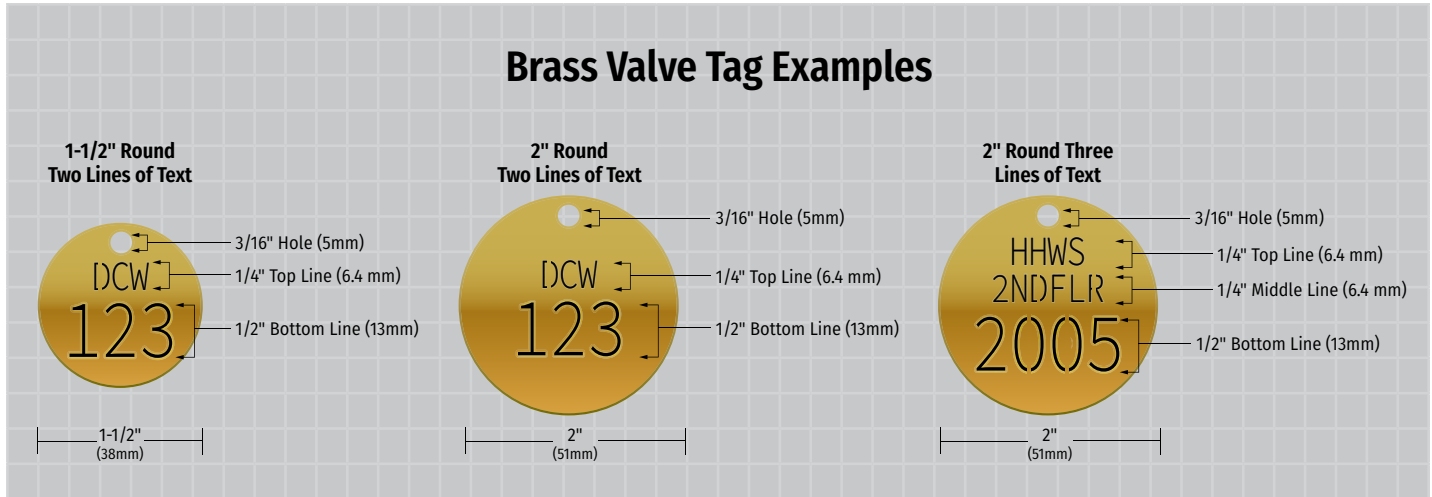

Tag Sizes	Top Line	Middle Line	Bottom Line
1-1/2" Round	1/4" (5 Characters)	N/A	1/2" (3 Characters)
1-1/2" Square	1/4" (5 Characters)	N/A	1/2" (3 Characters)
2" Round	1/4" (6 Characters)	1/4" (6 Characters)	1/2" (4 Characters)
2" Square	1/4" (6 Characters)	1/4" (6 Characters)	1/2" (4 Characters)
2" Octagon	1/4" (6 Characters)	1/4" (6 Characters)	1/2" (4 Characters)

Accessories
No. 6 Brass Beaded Chain
No. 16 Brass Jack Chain
Brass S Hooks
Zinc Hooks
Nylon Ties

For other options refer to the Accessories Spec Sheet

Standards met	ANSI/ASME A13.1-2015 Standards
Installation instructions	Hang from valve stem or valve handle
Temperature resistance	Up to 1200° F / 648°C (ink fill up to 180° F / 82° C)
Water resistance	Good
Finish	Glossy brass finish
Material properties	19 gauge brass (.036 in/0.914 mm)
Colors/fills	Black vinyl filled text (other colors available)
Storage stability	Indefinite
Outdoor durability	3 - 6 Years
Chemical resistance	Ok
Hole	3/16" Top hole
Accessories	No. 6 Brass beaded chain, no. 16 Brass jack chain, brass s-hooks, nylon tie, zinc hooks
Equivalent to	Brimar stamped brass tags, Seton brass valve tags, Marking Services stamped brass valve tags, Brady stamped brass valve tags

DATE _____ / _____ / _____ JOB _____
MM DD YYYY

CONTRACTOR NAME _____

