



Standard Sign Examples

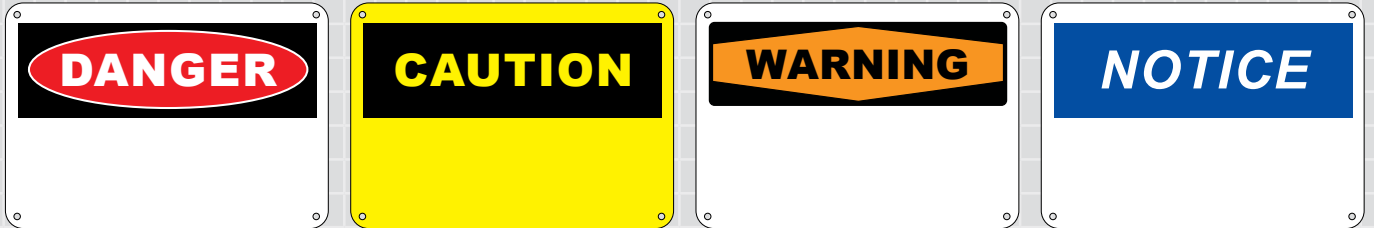

OSHA Standard - Bilingual

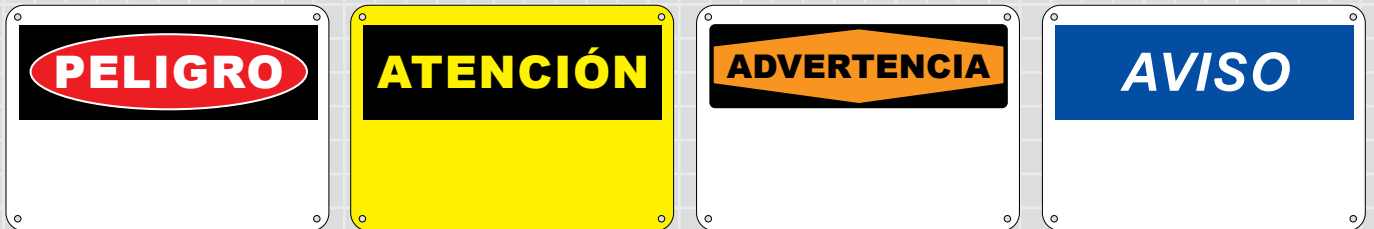

Product Specifications

Physical Properties

Project

Standard Sizes	7"x10", 10"x14", 14"x20" (othe sizes available upon request)
Installation Options	Adhesive backing, Holes in corners, Holes in corners and adhesive backing
Hole Dimensions	3/16" standard hole size
Service Temp	-40°F to 180°F (-40° C to 82°C)
Water Resistance	Excellent
Finish	Semi-gloss
Material Properties	.055" semi-rigid triblend Plastic
Material Options	Dry erase laminate available , UV laminate available
Standard Heading Options	Danger, Warning, Notice, Caution
Accessories Options	Zip ties, Stainless Steel Beaded Chain, Brass beaded chain
Color Options	Full color print available
Storage Stability	Indefinite when stored at 70°F (21°C) and 50% RH
Outdoor Durability	4 to 6 years, UV Resistant option available for outdoor use
Chemical Resistance:	Resistant to Acids, Alkalis and Salts
Equivalent To:	Brimar Safety Signs, Seton OSHA Signs, Marking Services Safety Signs

DATE / / JOB
 MM DD YYYY

CONTRACTORNAME