
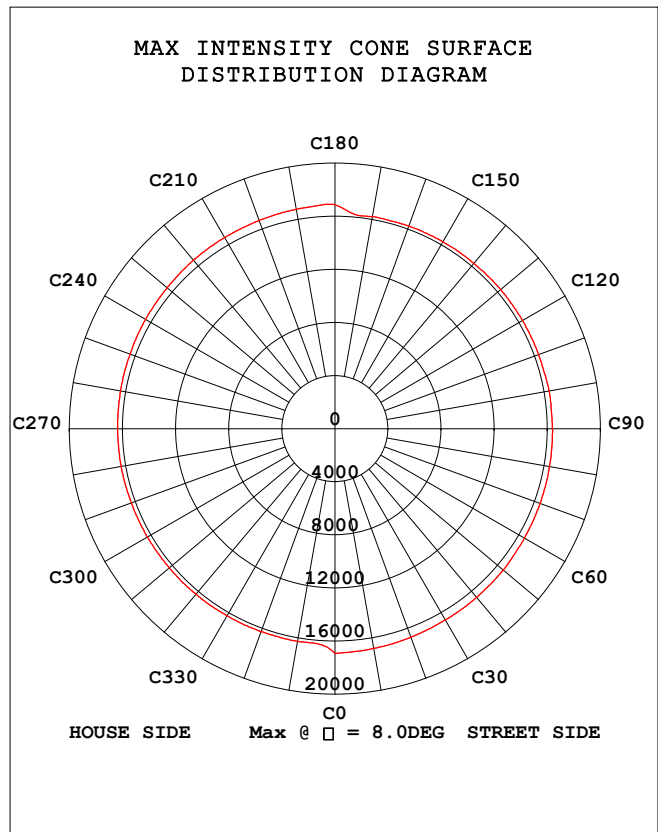


**STREETLIGHT PHOTOMETRIC TEST REPORT**

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 146.72 lm/W			
MODEL	HB03-240W	Imax(cd)	16919	<input type="checkbox"/> street_up(%)	0.0
NOMINAL POWER(W)	240	LOR(%)	100.0	<input type="checkbox"/> street_down(%)	49.5
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	34565	<input type="checkbox"/> house_up(%)	0.0
NOMINAL FLUX(lm)	34565	MAXIMUM @ (C, <input type="checkbox"/> )	0,8.0	<input type="checkbox"/> house_down(%)	50.5
LAMPS INSIDE	1	<input type="checkbox"/> up(%)	0.0	76 FLASHAREA(m2)	
TEST VOLTAGE(V)	120	<input type="checkbox"/> down(%)	100.0	SLI	

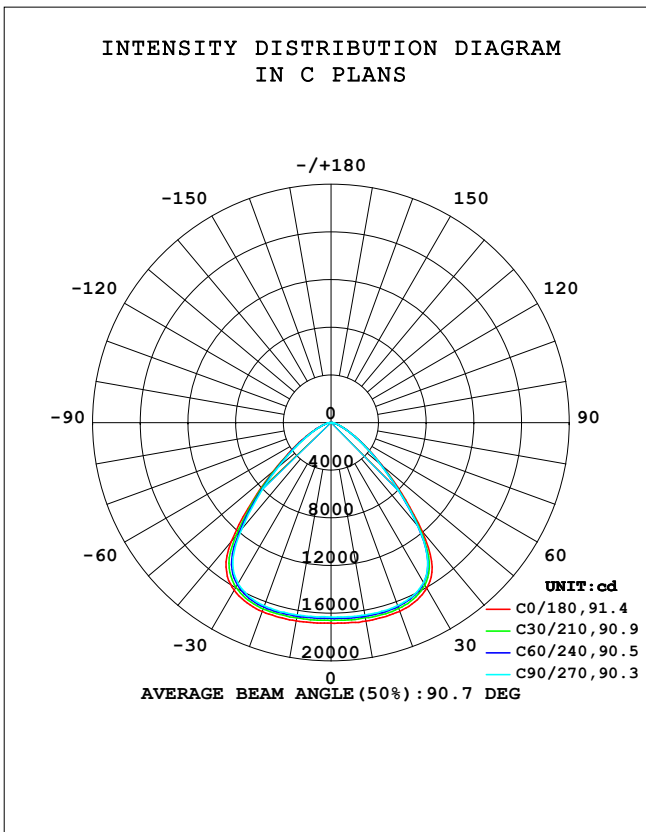


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:

**STREETLIGHT ISOCANDELA DIAGRAM**

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

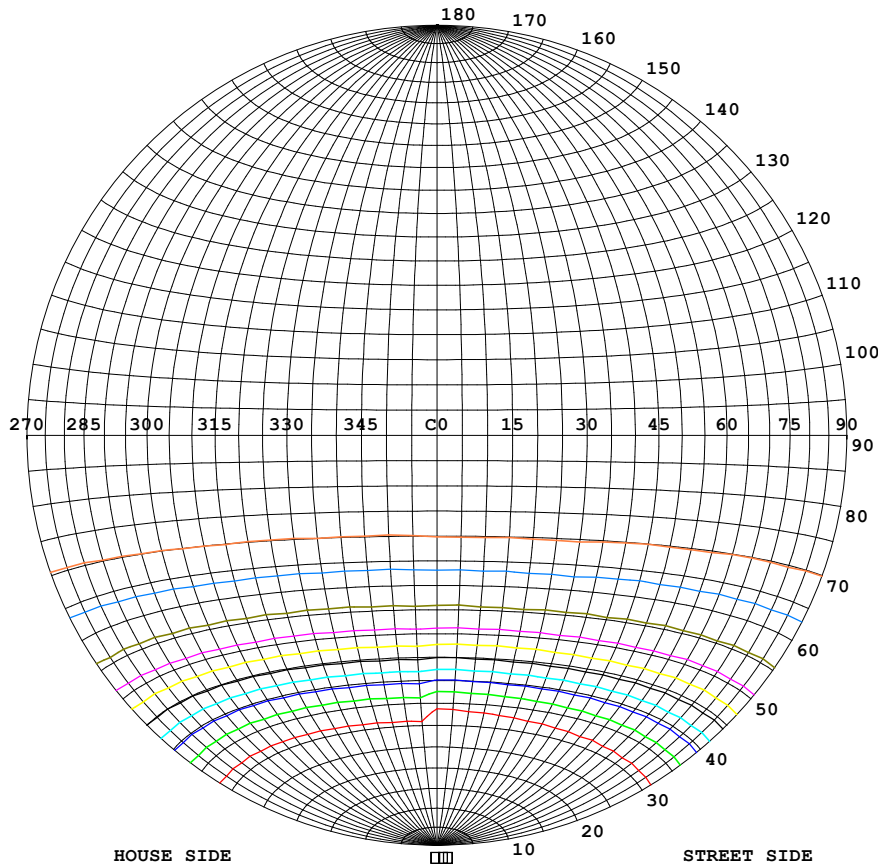

**Classification:**



IES:Type V - Very Short  
 CIE:Narrow - Short  
 IES:Cut-off  
 CIE:Full cut-off  
 Max.At80:8.593cd/klm  
 Max.At90:0.1114cd/klm  
 Max.80-90:8.593cd/klm  
 NRB 5101:Limited[1.4%]

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	16919
90%	15227
80%	13535
70%	11843
60%	10151
50%	8459
40%	6768
30%	5076
20%	3384
10%	1692
5%	846

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:

COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

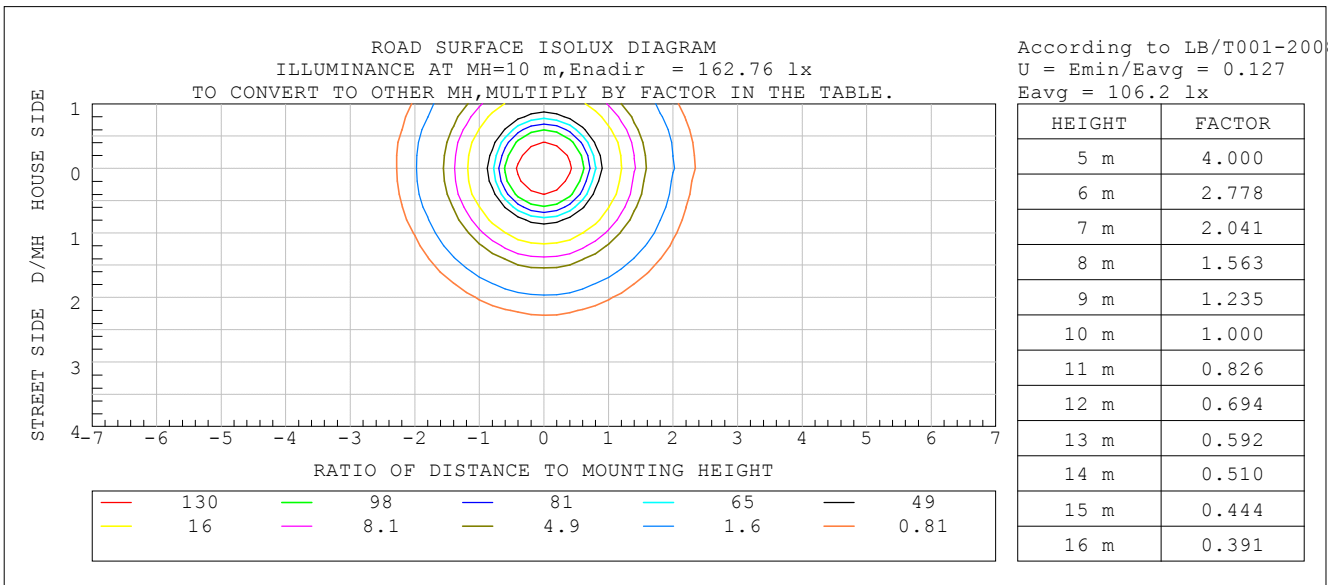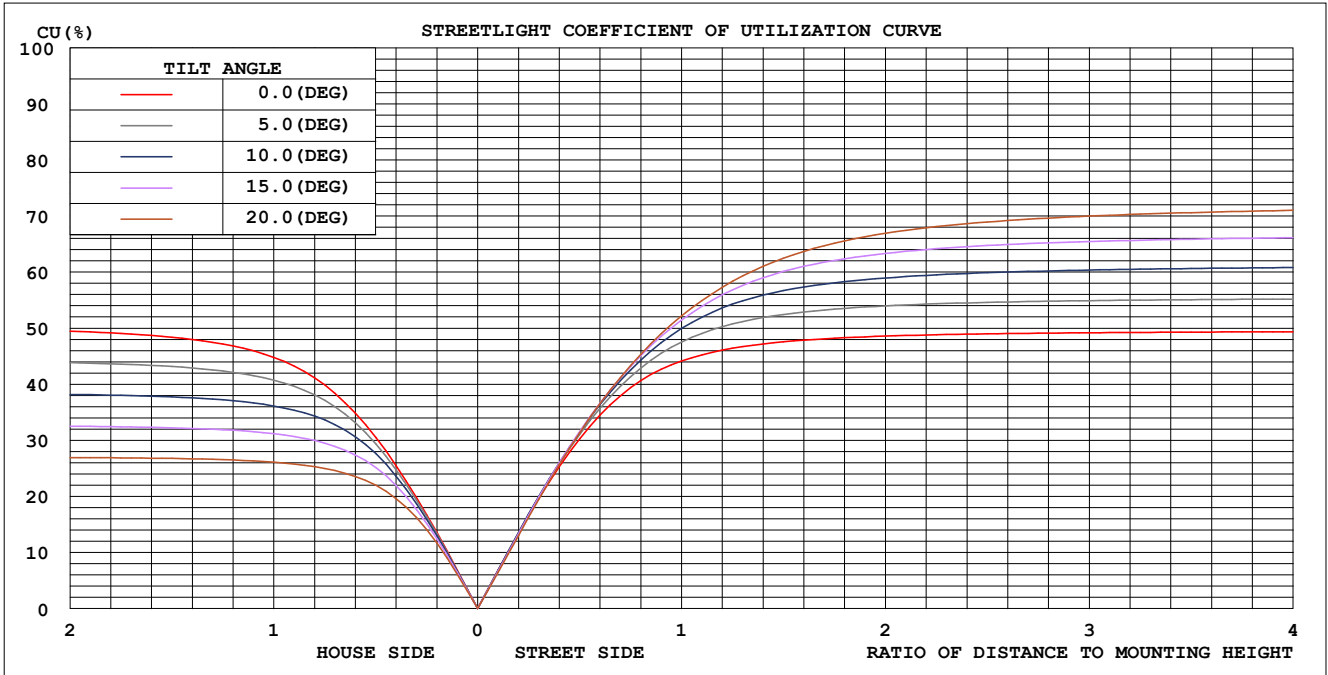

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2021-12-14

Range: 0 - 90DEG  
 Interval: 1.0DEG  
Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
Humidity: 65.0%  
Test Distance: 8.515m [K=1.0000]  
Remarks:

**ZONAL FLUX DIAGRAM**

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum,lamp
10	1690	1658	1639	1630	1689	1655	1638	1630	0- 10	1569	1569	4.54,4.54
20	1686	1651	1634	1626	1687	1653	1636	1627	10- 20	4666	6235	18,18
30	1606	1565	1552	1553	1625	1579	1560	1549	20- 30	7459	13694	39.6,39.6
40	1192	1151	1135	1173	1304	1211	1169	1155	30- 40	8851	22546	65.2,65.2
50	558.9	543.9	536.0	556.6	629.2	594.0	576.8	554.7	40- 50	6513	29059	84.1,84.1
60	230.0	226.6	223.0	233.1	260.0	240.8	236.4	227.8	50- 60	3370	32429	93.8,93.8
70	82.72	84.30	83.73	85.89	94.82	90.91	88.64	83.70	60- 70	1465	33895	98.1,98.1
80	24.23	25.71	26.51	27.87	29.56	28.74	28.35	26.67	70- 80	551.7	34446	99.7,99.7
90	0.3850	0.3721	0.3592	0.3554	0.2442	0.2272	0.2219	0.2186	80- 90	118.7	34565	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:×10cd								UNIT:lm			

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**


Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

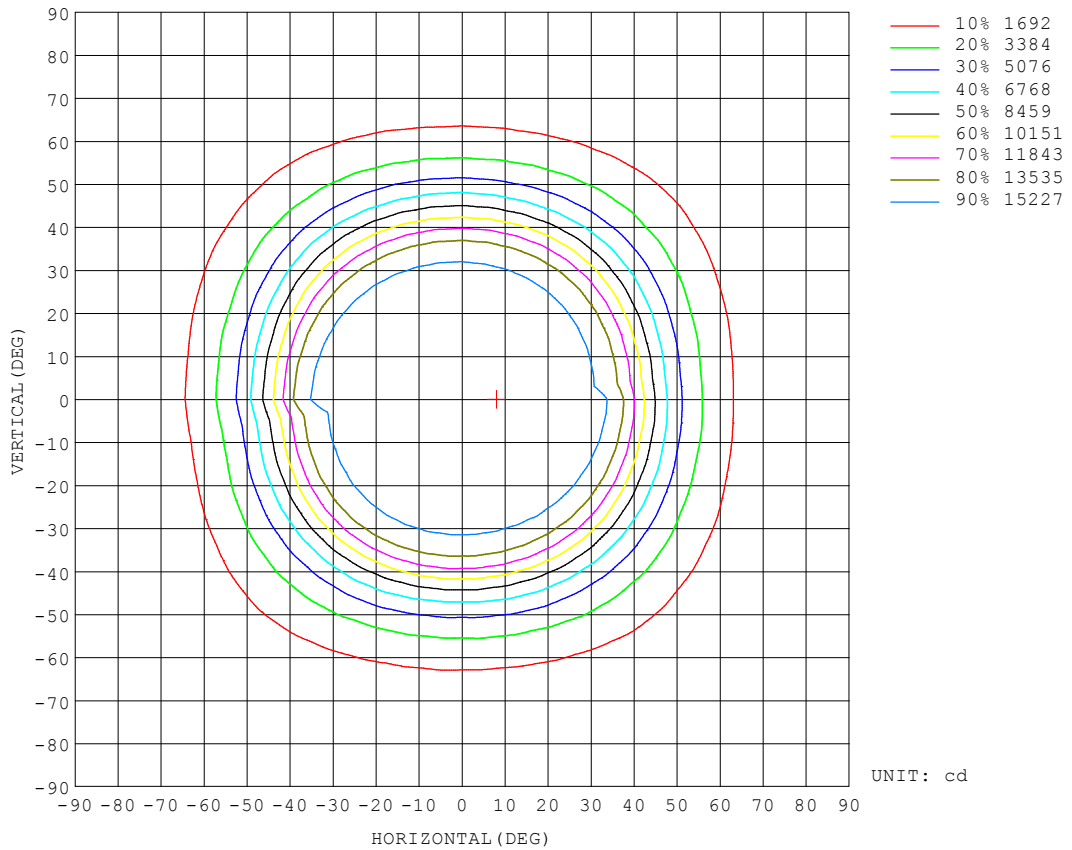

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

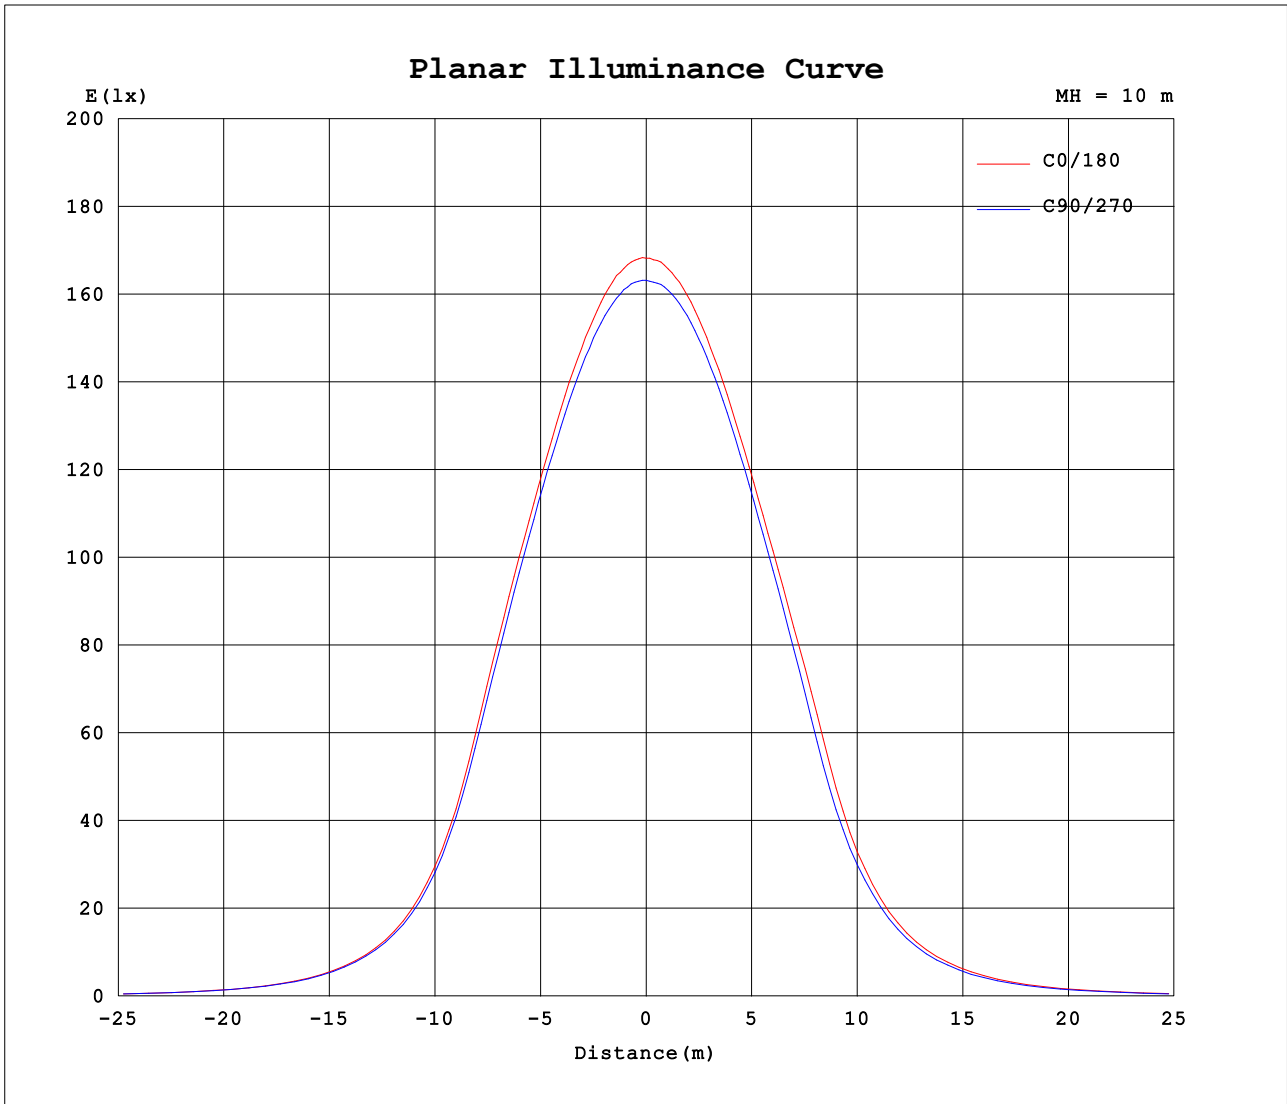


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:

**LCS REPORT**

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

**LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH**

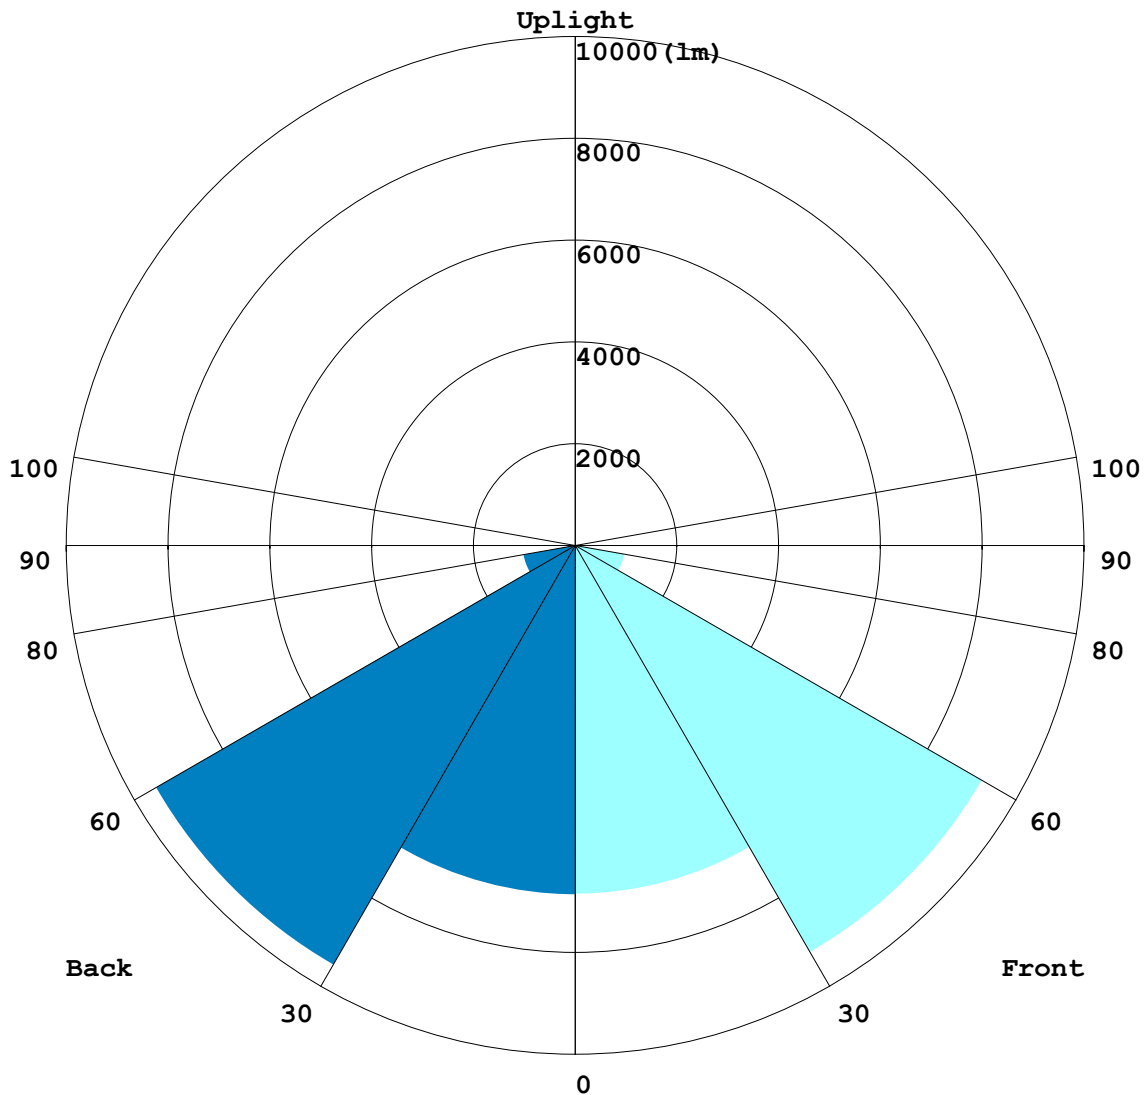

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:

**BUG REPORT**

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

**IESNA Luminaire Flux Distribution Table:**

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	6842.1	19.8
FM - Front-Medium(30-60)	9228.7	26.7
FH - Front-High(60-80)	982.62	2.8
FVH - Front-Very High(80-90)	56.504	0.2
<b>Total Forward Light</b>	<b>17110</b>	<b>49.5</b>

BL - Back-Low(0-30)	6852.3	19.8
BM - Back-Medium(30-60)	9506.3	27.5
BH - Back-High(60-80)	1034.3	3.0
BVH - Back-Very High(80-90)	62.241	0.2
<b>Total Back Light</b>	<b>17455</b>	<b>50.5</b>

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
<b>Total Up Light</b>	<b>0</b>	<b>0.0</b>

<b>BUG(Back,Up,Glare) Rating</b>	<b>B5-U0-G1</b>
----------------------------------	-----------------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	17455	0	17455
Street Side	17110	0	17110

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14


Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:



ROAD ISOCANDELA REPORT

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

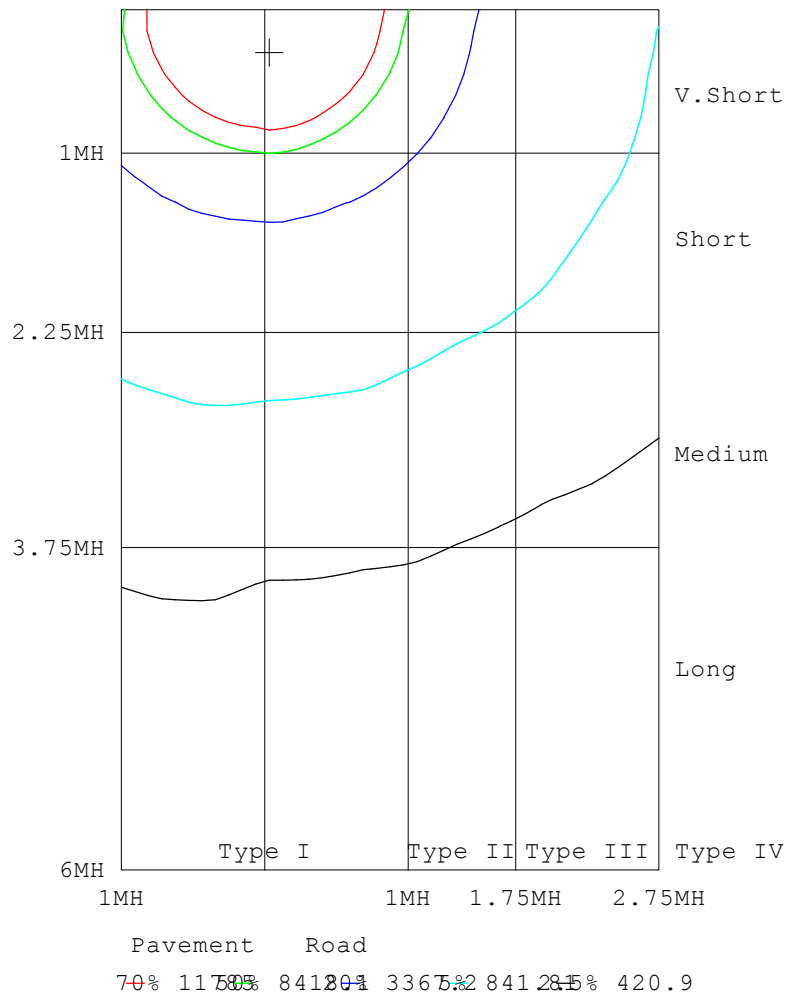

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: x10cd

C (DEG) □ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	1683	1678	1674	1669	1664	1662	1661	1656	1653	1649	1647	1644	1642	1640	1638	1638	1635	1634	1632
5	1687	1684	1677	1675	1669	1665	1662	1659	1655	1653	1651	1648	1647	1645	1641	1640	1639	1637	1635
10	1690	1686	1681	1678	1672	1670	1662	1664	1661	1658	1655	1651	1649	1648	1649	1645	1643	1641	1639
15	1690	1687	1681	1679	1674	1672	1667	1664	1661	1658	1656	1653	1652	1649	1647	1646	1644	1642	1639
20	1686	1681	1675	1671	1665	1663	1659	1657	1653	1651	1647	1646	1644	1641	1640	1639	1636	1637	1634
25	1660	1658	1651	1647	1645	1638	1634	1632	1627	1626	1620	1620	1616	1618	1615	1613	1611	1611	1612
30	1606	1602	1594	1590	1583	1581	1575	1572	1568	1565	1562	1559	1555	1556	1553	1553	1550	1553	1552
35	1480	1476	1465	1463	1450	1451	1437	1438	1427	1430	1420	1424	1416	1420	1414	1419	1414	1420	1416
40	1192	1192	1175	1177	1164	1167	1154	1158	1146	1151	1140	1145	1135	1142	1131	1140	1132	1143	1135
45	839	843	830	833	820	823	811	814	803	809	800	807	800	805	798	804	797	805	797
50	559	563	556	562	552	555	544	549	541	544	538	543	540	548	543	546	538	542	536
55	366	370	359	361	354	362	356	360	352	358	353	360	353	358	351	358	354	359	352
60	230	232	226	227	223	225	221	225	223	227	223	226	222	225	222	225	223	226	223
65	141	140	141	140	138	136	134	138	140	140	138	137	137	139	138	138	137	138	139
70	82.7	82.6	82.5	83.5	81.7	81.1	80.1	82.5	83.3	84.3	82.7	82.1	82.0	83.7	83.2	82.9	81.9	83.4	83.7
75	46.8	46.9	46.6	47.2	46.4	46.4	46.2	47.4	47.9	48.6	47.9	47.9	47.9	48.8	48.5	48.5	48.2	48.9	48.9
80	24.2	24.4	24.1	24.5	24.1	24.4	24.4	25.1	25.2	25.7	25.3	25.6	25.5	26.1	26.0	26.2	26.0	26.6	26.5
85	7.75	7.81	7.80	7.88	7.84	7.95	7.91	8.22	8.18	8.43	8.44	8.60	8.72	8.96	8.98	9.20	9.17	9.44	9.44
90	0.39	0.39	0.38	0.38	0.38	0.38	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.36	0.37	0.36

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

C (DEG) \ □ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	1631	1629	1628	1628	1627	1626	1625	1625	1624	1623	1623	1622	1622	1622	1621	1619	1618	1683	1678
5	1634	1635	1634	1631	1629	1630	1628	1628	1626	1627	1626	1624	1623	1623	1622	1622	1621	1686	1680
10	1637	1636	1637	1634	1632	1634	1631	1628	1630	1629	1628	1627	1626	1626	1625	1625	1623	1689	1684
15	1640	1640	1638	1637	1635	1635	1633	1632	1631	1630	1630	1628	1627	1627	1627	1626	1626	1691	1686
20	1633	1633	1631	1631	1629	1629	1628	1628	1626	1625	1625	1624	1624	1622	1622	1621	1622	1687	1683
25	1611	1608	1608	1606	1608	1606	1608	1605	1605	1602	1603	1602	1603	1601	1600	1598	1601	1670	1665
30	1552	1552	1553	1552	1553	1550	1554	1552	1553	1552	1553	1549	1551	1549	1549	1545	1546	1625	1618
35	1423	1420	1428	1425	1431	1431	1436	1433	1439	1435	1441	1436	1438	1434	1437	1430	1432	1529	1519
40	1146	1139	1151	1146	1159	1156	1167	1161	1173	1167	1178	1172	1181	1173	1180	1172	1177	1304	1285
45	808	801	813	810	821	815	825	819	830	824	835	830	842	835	845	838	845	932	919
50	542	538	545	544	554	551	556	549	557	553	561	559	568	565	574	568	572	629	618
55	358	353	359	354	359	354	363	361	368	364	372	367	375	369	375	366	374	410	405
60	227	223	226	222	225	223	228	228	233	231	236	233	236	232	235	232	235	260	256
65	140	139	138	137	138	139	140	141	143	144	146	144	144	143	144	144	145	159	157
70	84.6	83.5	83.1	82.2	83.8	83.9	84.6	84.0	85.9	86.6	87.7	86.5	86.1	85.1	86.7	87.0	87.3	94.8	93.2
75	49.5	49.0	48.9	48.5	49.3	49.2	49.7	49.5	50.5	50.7	51.3	50.7	50.6	50.1	50.9	50.9	51.2	54.4	53.8
80	27.0	26.7	26.9	26.5	27.0	26.8	27.3	27.2	27.9	27.9	28.3	27.9	28.1	27.8	28.2	28.0	28.2	29.6	29.3
85	9.62	9.64	9.78	9.76	9.97	9.91	10.2	10.1	10.3	10.3	10.5	10.4	10.5	10.5	10.6	10.5	10.6	11.7	11.6
90	0.36	0.36	0.36	0.35	0.36	0.35	0.36	0.35	0.36	0.35	0.36	0.35	0.36	0.35	0.36	0.36	0.36	0.24	0.25

C Range: 0 - 360DEG      □ Range: 0 - 90DEG  
 C Interval: 5.0DEG      □ Interval: 1.0DEG  
 Test Speed: HIGH      Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Temperature: 25.3DEG      Humidity: 65.0%  
 Operators: DAMIN      Test Distance: 8.515m [K=1.0000]  
 Test Date: 2021-12-14      Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

Table--3

UNIT: ×10cd

C (DEG) □ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	1674	1669	1664	1662	1661	1656	1653	1649	1647	1644	1642	1640	1638	1638	1635	1634	1632	1631	1629
5	1678	1671	1668	1665	1660	1659	1655	1652	1649	1647	1646	1643	1641	1640	1638	1637	1635	1633	1632
10	1680	1676	1673	1670	1663	1662	1659	1655	1654	1650	1650	1646	1645	1643	1642	1639	1638	1637	1637
15	1682	1677	1673	1667	1667	1663	1661	1658	1657	1652	1651	1650	1647	1646	1644	1641	1643	1639	1638
20	1678	1675	1670	1664	1665	1662	1656	1653	1652	1651	1648	1646	1644	1642	1639	1636	1636	1634	1633
25	1660	1656	1652	1646	1644	1639	1636	1631	1630	1627	1627	1623	1622	1618	1618	1615	1616	1610	1612
30	1614	1607	1605	1597	1595	1588	1588	1579	1580	1574	1572	1567	1566	1562	1562	1558	1560	1557	1558
35	1517	1506	1503	1493	1491	1479	1478	1468	1467	1457	1456	1447	1448	1442	1442	1435	1439	1431	1435
40	1285	1265	1264	1245	1247	1228	1229	1211	1211	1195	1196	1180	1184	1170	1175	1162	1169	1160	1167
45	924	908	913	900	904	890	893	879	881	869	871	858	861	849	853	843	848	838	843
50	622	612	617	606	609	599	604	594	595	584	588	579	584	576	580	572	577	568	571
55	407	396	399	392	396	387	390	380	388	382	388	380	384	376	381	372	375	367	373
60	257	250	250	245	247	242	244	241	245	243	245	241	243	238	239	235	236	233	234
65	157	157	154	150	149	148	151	151	151	149	150	149	150	147	146	145	146	145	145
70	94.7	93.6	93.0	89.6	89.3	89.0	91.4	90.9	91.0	89.5	90.7	90.1	90.8	88.9	88.1	87.3	88.6	87.8	87.9
75	54.6	54.0	53.8	52.1	52.1	52.0	53.3	52.9	53.4	52.6	53.3	53.0	53.4	52.4	52.1	51.5	52.1	51.6	51.7
80	29.7	29.3	29.3	28.5	28.6	28.4	29.0	28.7	29.1	28.8	29.2	28.9	29.1	28.5	28.6	28.0	28.3	27.9	28.1
85	11.7	11.5	11.5	11.2	11.3	11.2	11.3	11.2	11.3	11.1	11.2	11.0	11.0	10.8	10.7	10.5	10.5	10.3	10.3
90	0.24	0.24	0.24	0.24	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.30V I:1.9617A P:235.58W PF:0.9983 Freq:60.00Hz Lamp Flux:34565x1 lm		
NAME: HB03-240W	TYPE:240W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

Table--4

UNIT: x10cd

C (DEG) □ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	1628	1628	1627	1626	1625	1625	1624	1623	1623	1622	1622	1622	1621	1619	1618				
5	1633	1631	1630	1631	1629	1628	1628	1627	1627	1626	1624	1626	1623	1623	1623				
10	1635	1634	1632	1632	1631	1632	1630	1629	1629	1630	1627	1626	1627	1626	1626				
15	1638	1636	1636	1635	1633	1633	1633	1631	1632	1630	1630	1630	1628	1628	1626				
20	1632	1631	1630	1629	1628	1628	1627	1627	1625	1625	1624	1623	1622	1621	1621				
25	1611	1611	1608	1608	1604	1605	1604	1603	1603	1602	1601	1600	1599	1597	1595				
30	1553	1555	1553	1553	1550	1551	1549	1550	1545	1546	1543	1545	1540	1541	1537				
35	1430	1433	1425	1430	1426	1429	1423	1426	1420	1422	1416	1419	1410	1413	1407				
40	1158	1165	1157	1166	1157	1164	1155	1162	1154	1159	1148	1155	1145	1149	1138				
45	832	838	827	837	828	835	827	833	824	830	820	827	817	824	814				
50	561	565	557	563	556	561	555	562	557	562	555	559	552	556	547				
55	366	372	364	369	362	369	362	368	362	370	366	371	364	367	360				
60	231	233	228	231	227	230	228	230	229	232	231	233	230	233	229				
65	142	142	142	141	140	140	140	142	143	143	142	142	142	144	143				
70	85.9	86.0	84.8	85.2	83.8	84.2	83.7	85.5	85.8	86.0	84.4	85.4	85.5	86.7	85.4				
75	50.6	50.6	49.8	50.0	49.2	49.4	49.1	50.0	49.9	50.2	49.3	49.7	49.7	50.2	49.6				
80	27.5	27.6	27.1	27.3	26.7	27.0	26.7	27.1	26.9	27.1	26.6	26.9	26.6	26.9	26.4				
85	10.1	10.0	9.71	9.65	9.46	9.52	9.39	9.53	9.36	9.49	9.24	9.27	9.14	9.19	9.08				
90	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22				

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2021-12-14

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.515m [K=1.0000]  
 Remarks: